

OVERVIEW

The nDTC is a low voltage powered capacitive touch screen digital time clock that delivers smart and simple scheduling, dimming, switching, occupancy and photosensing for small-to-medium projects that require minimal footprint and flexibility of configuring. Available as a single gang wall-mount, or pre-assembled to an ARP panel, the device communicates with an nLight Wired network and supports up to 127 digital devices in an nLight control zone.

FEATURES

- Create and control up to 32 schedules (Normal & Holiday)
- Astronomical Timeclock feature enables +/- Sunset or Sunrise settings and programmable Latitude/ Longitude
- Controls up to 127 nLight devices
- Password protected configuration
- Optional password protected lock out
- Proximity screen sensor for auto "wake-up"
- Slim and compact form factor
- 3.5" full-color responsive capacitive touch screen
- Mounts to a single gang switch box (Standalone version)

Warranty

Five-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.



*nLight nDTC
Touch Screen
Digital Time Clock*



ORDERING INFORMATION

			Example: nDTC NPWS WH	
Switch	Power Supply Type		Color	
nDTC	[blank]	Includes PS150	WH	White
	PS347	Includes PS150-347	BK	Black
	NPWS	No Power Supply		

Installation – Wall-Mount Version

Upon unpacking, inspect the contents of the carton for shipping damages. Do not install a damaged device.



Take reasonable precautions to prevent electrostatic discharge to the device when installing, servicing or during operation. Discharge accumulated static electricity by touching one's hand to a well-grounded object before working with the device.

For proper installation and subsequent operation of the device, pay special attention to the following recommendations:

1. Turn circuit breaker to **OFF** position, or remove fuse(s), and test that power is off before installation process.



Never wire any electrical device with power turned on. Wiring while **HOT** may cause permanent damage to this device and other equipment and void warranty.

2. Remove the front cover of the device from the mounting plate:
 - a. Remove the security screw
 - b. Using an appropriately sized tool, press in the two (2) release tabs on the sides of the device and pull the front cover out from the bottom. See Figure 2 for security screw and release tab locations.
3. Pull all cables 6" (15cm) out of the wall and insert them through the central hole of the back plate.
4. Make sure that the mounting surface is flat and clean.
5. Screw the back plate onto the electrical junction box.
6. Plug the wire(s) into the connector(s). Gently push excess wiring back into the wall.
7. Reattach the front plate and make sure it clips tightly into place. Tighten the security screw.
8. Upon restoring power, unit will begin discovering connected devices. After discovery is complete, use touch screen features to confirm operation.

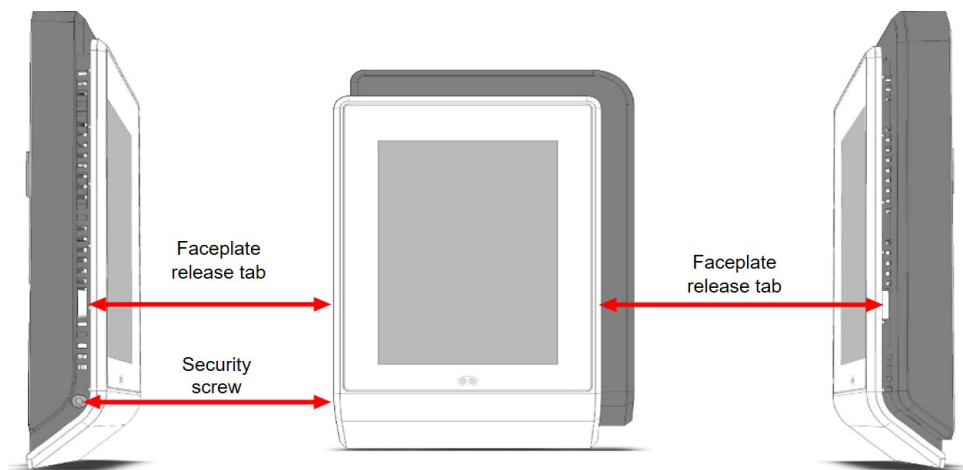


Figure 2 - Security Screw and Faceplate Tab Locations

SPECIFICATIONS

Electrical	Input Ratings	15-24VDC, 60mA, Class 2 (via included PS-150 or PS-150-347 power supply)
	Standards/Ratings	Energy Management Equipment, FCC Rules Part 15, Subpart B Class B
Mechanical	Dimensions	5.18"H x 3.37"W x 0.75"D (131.5mm x 85.5mm x 19mm)
	Mounting	Single-Gang Box or Low Voltage Ring
	Connection Type	RJ-45 nLight Network Ports (2) Low-Voltage Terminals
	Color:	White, Black
Environmental	Warrantied Operating Temperature	Standard: 32°F to 122°F (0°C to 50°C)
	Relative Humidity	Up to 90%, Non-Condensing
	Standards/ Rating	RoHS
General	Standards/ Rating	System Component to aid in compliance with Title 24, ASHRAE 90.1, IECC