



ALTV244UL Series CCTV Power Supplies

Installation Guide

Models Include:

- ***ALTV244UL***
 - ***24VAC @ 3.5 amp (85VA)
or 28VAC @ 3 amp (85VA).***
 - ***Four (4) Fuse Protected Outputs.***
- ***ALTV244ULCB***
 - ***24VAC @ 3.5 amp (85VA)
or 28VAC @ 3 amp (85VA).***
 - ***Four (4) PTC Protected Outputs.***
- ***ALTV244ULX***
 - ***24VAC @ 3.5 amp (85VA)
or 28VAC @ 3 amp (85VA).***
 - ***Four (4) Fuse Protected Outputs.***
- ***ALTV244175UL***
 - ***24VAC @ 7 amp (175VA)
or 28VAC @ 6.25 amp (175VA).***
 - ***Four (4) Fuse Protected Outputs.***
- ***ALTV244175ULCB***
 - ***24VAC @ 7 amp (175VA)
or 28VAC @ 6.25 amp (175VA).***
 - ***Four (4) PTC Protected Outputs.***

Overview:

The following Altronix CCTV Power Supplies provide 24VAC or 28VAC distributed via four (4) fuse or PTC protected outputs for powering CCTV Cameras, heaters and other video accessories.

Four (4) Output ALTV244UL Reference Chart:

Altronix Model Number	Output Voltage	Total Output Current (Power)	Number of Outputs	PTC Protected Outputs (Class 2 power limited for Dry locations) (Class 3 for Wet locations).	Fuse Protected Class 2 Outputs (Class 2 power limited for Dry locations) (Class 3 for Wet locations).	Individual Output Current (max per output not to exceed total output current)	Fuse Ratings	Main Fuse Ratings	Primary In-line Fuse Ratings	115VAC 50/60Hz Input Current	Agency Listings
ALTV244UL	24VAC	3.5 amp	4	-	Yes	3.5 amp	3.5 amp	5 amp/250V	3.5 amp/250V	.9 amp	cULus CE
	28VAC	3 amp									
ALTV244ULX	24VAC	3.5 amp	4	-	Yes	3.5 amp	3.5 amp	5 amp/250V	3.5 amp/250V	.9 amp	cULus CE
	28VAC	3 amp									
ALTV244ULCB	24VAC	3.5 amp	4	Yes	-	2.5 amp	-	5 amp/250V	3.5 amp/250V	.9 amp	cULus CE
	28VAC	3 amp		-	Yes						
ALTV244175UL	24VAC	7 amp	4	-	Yes	3.5 amp	3.5 amp	10 amp/250V	-	2.7 amp	cULus CE
	28VAC	6.25 amp									
ALTV244175ULCB	24VAC	7 amp	4	Yes	-	2.5 amp	-	10 amp/250V	-	2.7 amp	cULus CE
	28VAC	6.25 amp									

Specifications:

- UL Listed for Commercial CCTV Equipment (UL 2044). CUL Listed - CSA Standard C22.2 No.1-98, Audio, Video and Similar Equipment.
- Surge suppression.
- AC power LED indicator.
- Power ON/OFF switch (ALTV244UL, ALTV244ULX or ALTV244ULCB).
- Illuminated power disconnect circuit breaker with manual reset (ALTV244175UL, ALTV244175ULCB).
- Unit maintains camera synchronization.
- Ease of installation saves time & eliminates costly labor.
- Spare fuses included (on fuse protected models).

Enclosure Dimensions:

ALTV244UL, ALTV244ULCB
8.5"H x 7.5"W x 3.5"D
ALTV244ULX
13"H x 13.5"W x 3.25"D
ALTV244175UL, ALTV24175ULCB
12.25"H x 7.75"W x 4.5"D

Installation Instructions:

1. Mount unit in desired location.
2. Set power switch on power distribution board marked [PD] to OFF position for models ALTV244UL, ALTV244ULX or ALTV244ULCB (Figs. 1-3, pgs. 4, 5). Set power disconnect circuit breaker to OFF position for models ALTV244175UL or ALTV244175ULCB (Figs. 4a, 5a, pg. 6).

3. All units are factory set for 24VAC operation.
For 28VAC operation adjust unit prior to applying power as follows:
Remove wires marked [24V] and [28V] from terminals marked [P] and [S]. Connect wire marked [28V] to terminal marked [P] and connect wire marked [24V] to terminal marked [S].
Note: ALTV244ULCB set for 28VAC operation is not Class 2 Rated, not power limited.
4. Connect AC power to the black and white flying leads of the transformer (Figs. 1-5, pgs. 4-6).
Secure green lead to earth ground. Use 18 AWG or larger gauge for all power connections.
Keep power limited (PTC protected outputs only) wiring separate from non-power limited wiring. Minimum .25" spacing must be provided. Use separate knockouts.
5. Set power switch on power distribution board marked [PD] to ON position for models ALTV244UL, ALTV244ULX or ALTV244ULCB (Figs. 1-3, pgs. 4, 5). Set power disconnect circuit breaker to RESET (ON) position for models ALTV244175UL or ALTV244175ULCB (Figs. 4A, 5A, pg. 6).
6. Measure output voltage before connecting devices. This helps avoid potential damage.
Terminals marked [1P - 4P] are of the same polarity.
CAUTION: Determine the maximum operating voltage of the equipment being powered before adjusting the output voltage.
7. Set power switch on power distribution board marked [PD] to OFF position for models ALTV244UL, ALTV244ULX or ALTV244ULCB (Figs. 1-3, pgs. 4, 5). Set power disconnect circuit breaker to OFF position for models ALTV244175UL or ALTV244175ULCB (Figs. 4A, 5A, pg. 6).
8. Connect devices to terminals marked [1P - 1N through 4P - 4N] on PD4 or PD4CB board (Figs. 1-5, pgs. 4-6), carefully observing polarity.
9. Set power switch on power distribution board marked [PD] to ON position for models ALTV244UL, ALTV244ULX or ALTV244ULCB (Figs. 1-3, pgs. 4, 5). Set power disconnect circuit breaker to RESET (ON) position for models ALTV244175UL or ALTV244175ULCB (Figs. 4A, 5A, pg. 6).
10. Green LED will illuminate when power is present.
11. Upon completion of wiring, secure enclosure door with screws (supplied). Installation of cam lock is optional.
Caution: Equipment to be installed/serviced by authorized/trained personnel only. Shut branch circuit power before installing/servicing equipment.

WARNING: To reduce the risk of fire or electric shock, do not expose the unit to rain or moisture. This installation should be made by qualified service personnel and should conform to all local codes and in accordance with the National Electrical Code. Use 75° C or higher rated UL insulated wiring for connecting the unit to the mains. Replace fuses with the same type and rating (refer to Four (4) Output ALTV244UL Reference Chart, pg. 2)

Terminal Identification:

PD4 - Power Distribution Module

1P - 4P	AC output.
1N - 4N	AC output.



The lightning flash with arrow head symbol within an equilateral triangle is intended to alert the user to the presence of an insulated “DANGEROUS VOLTAGE” within the products enclosure that may be of sufficient magnitude to constitute an electric shock.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN



CAUTION: To reduce the risk of electric shock do not open enclosure. There are no user serviceable parts inside. Refer servicing to qualified service personnel.

Fig. 1
ALTV244UL

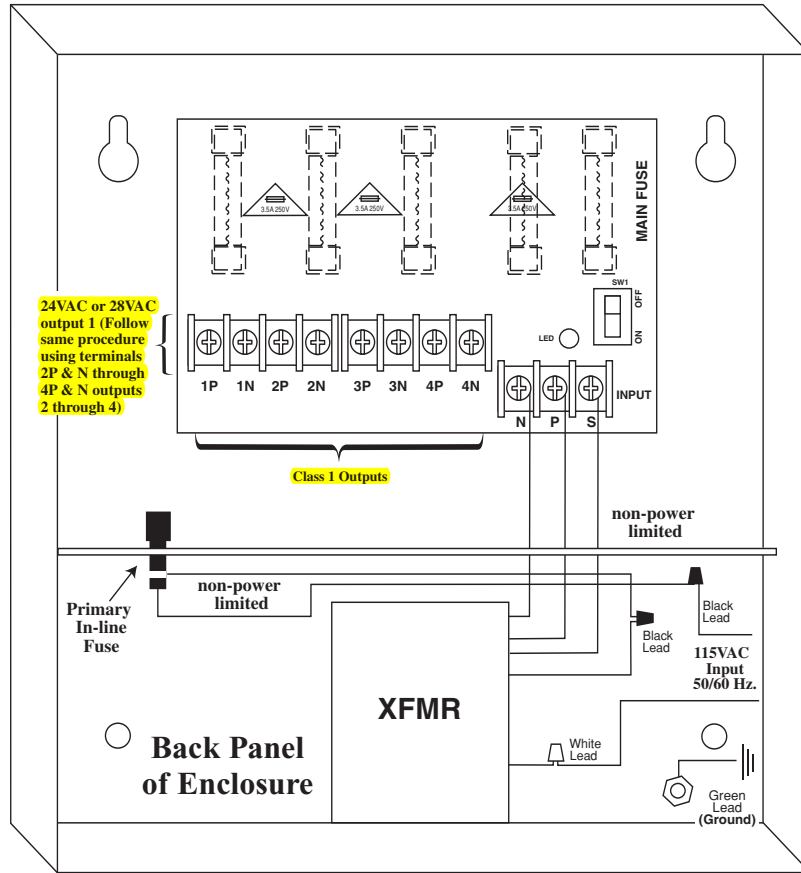


Fig. 2
ALTV244ULCB


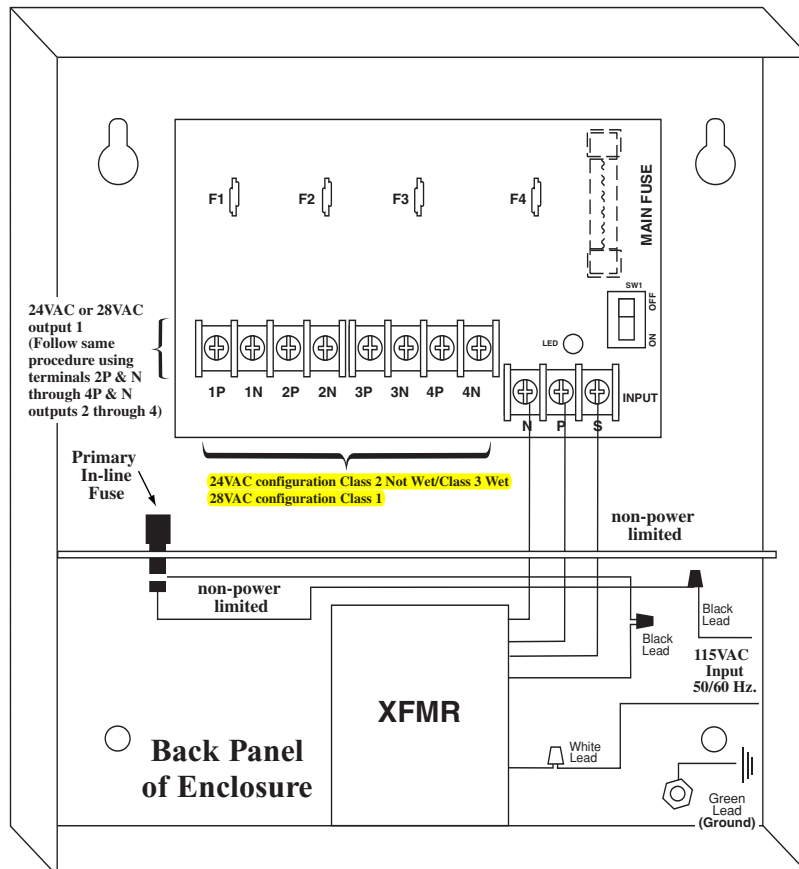


Fig. 3
ALTV244ULX

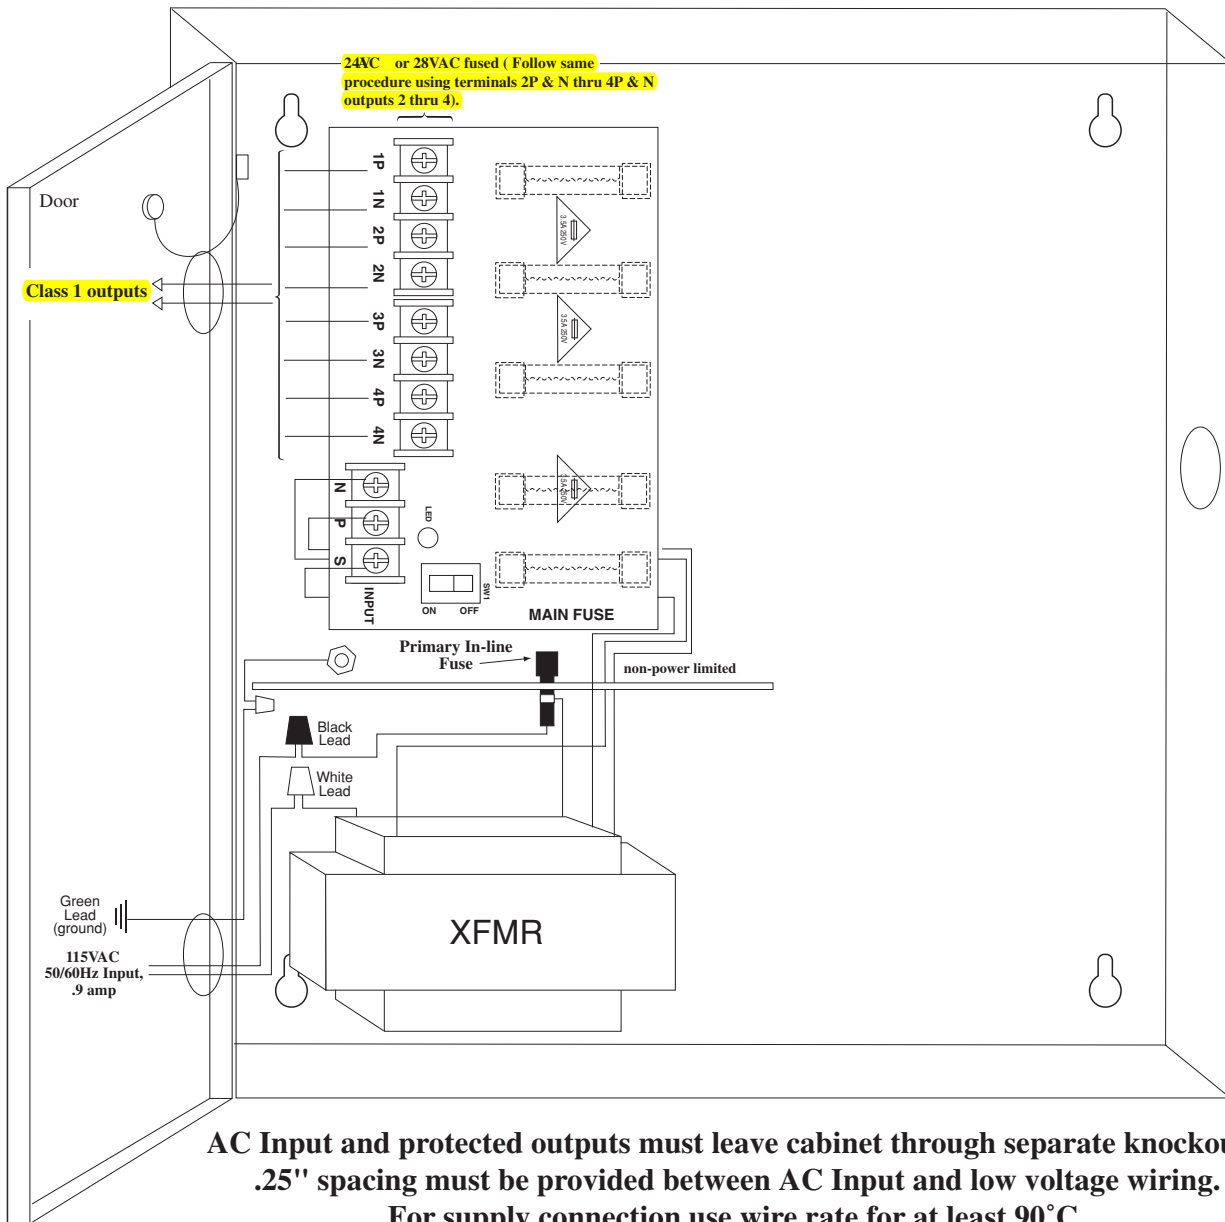

**AC Input and protected outputs must leave cabinet through separate knockouts.
 .25" spacing must be provided between AC Input and low voltage wiring.
 For supply connection use wire rate for at least 90°C.**

Fig. 4
ALTV244175UL


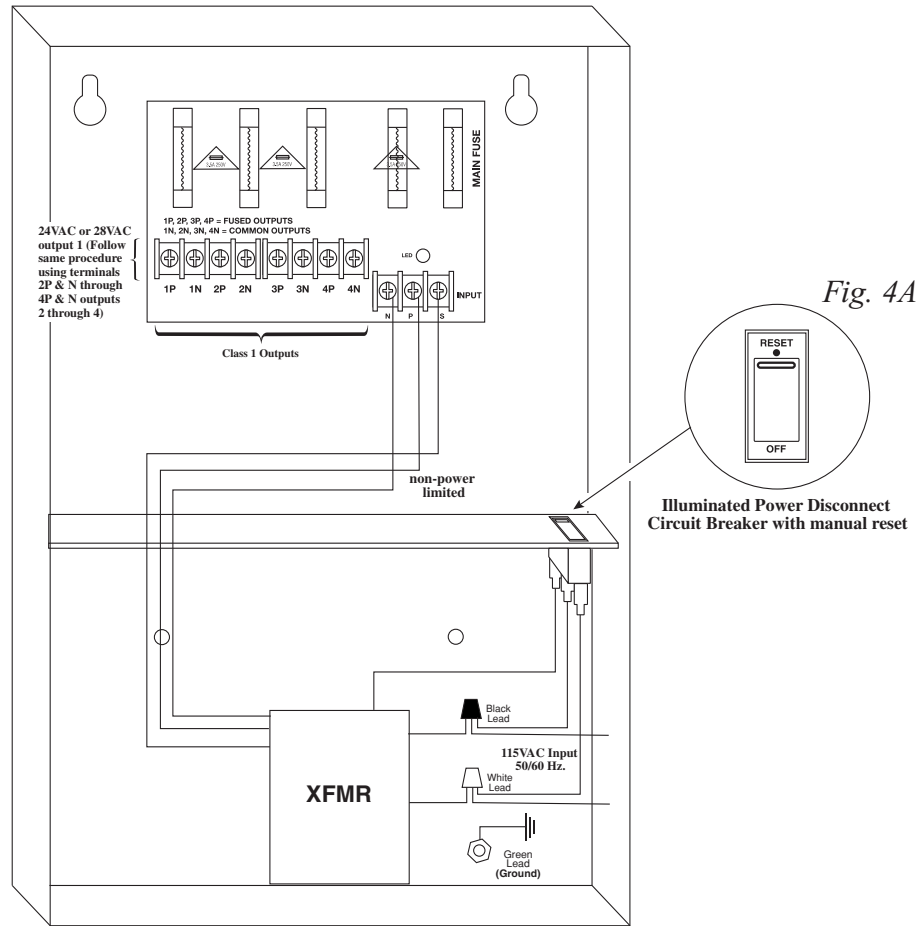


Fig. 5
ALTV244175ULCB

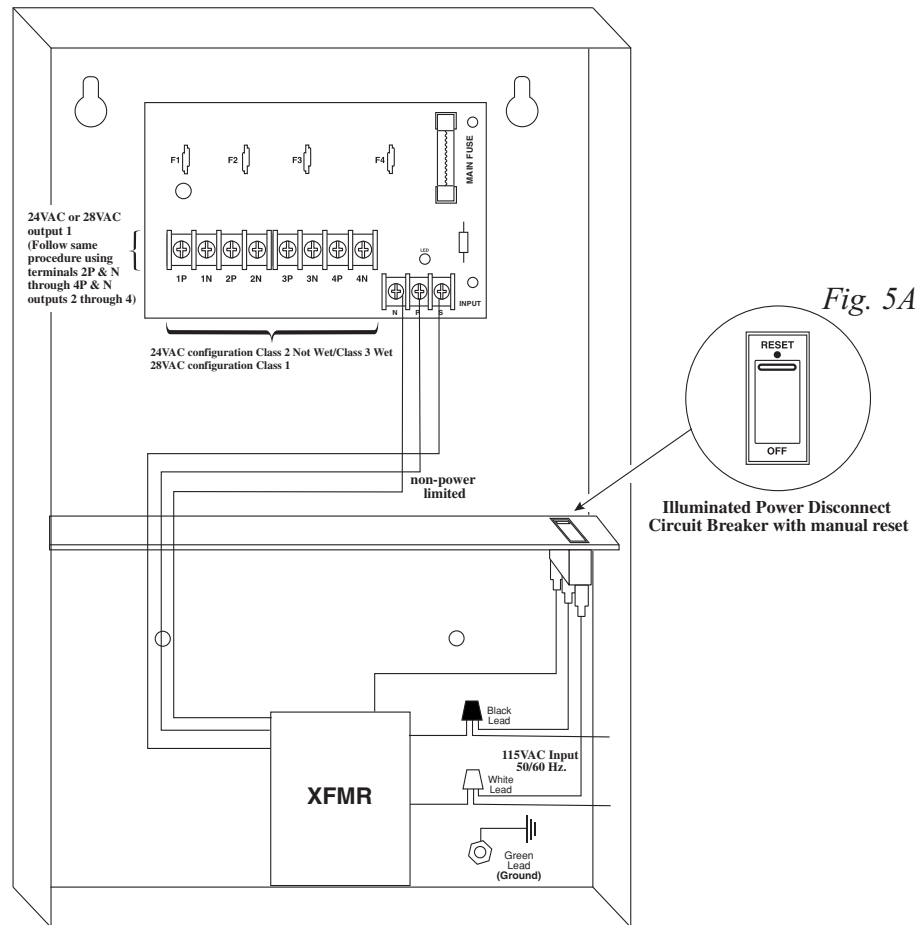


Enclosure Dimensions for:

• **ALTV244UL**

• **ALTV244ULCB**

8.5"H x 7.5"W x 3.5"D

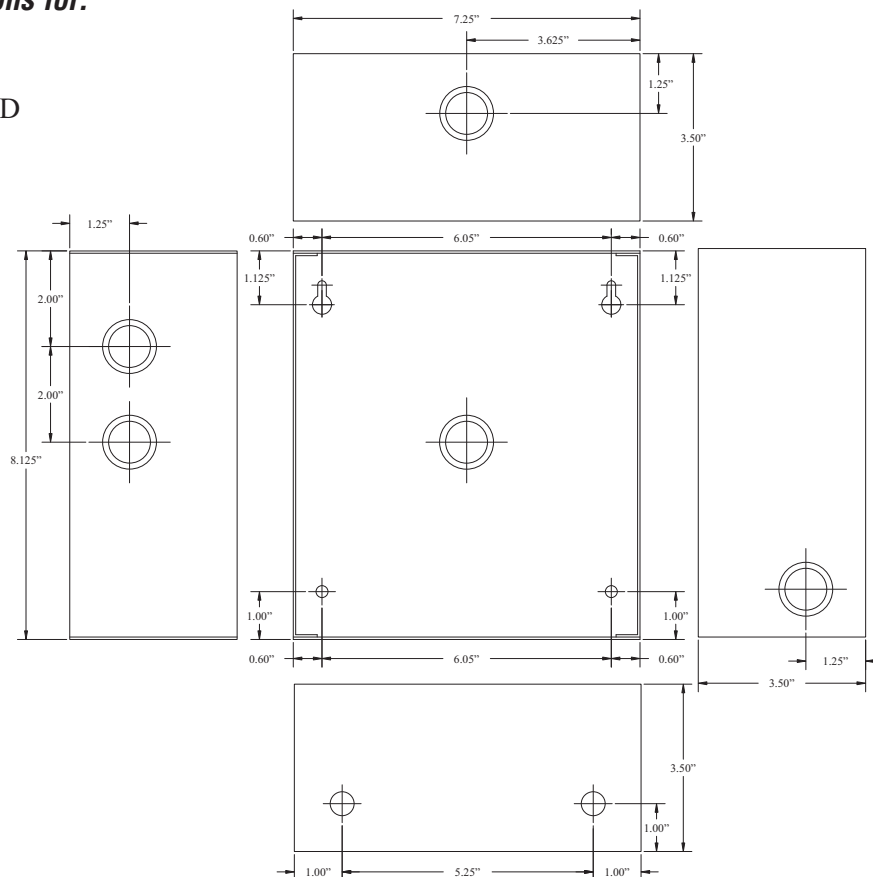


Enclosure Dimensions for:

• **ALTV244175UL**

• **ALTV244175ULCB**


12.25"H x 7.75"W x 4.5"D

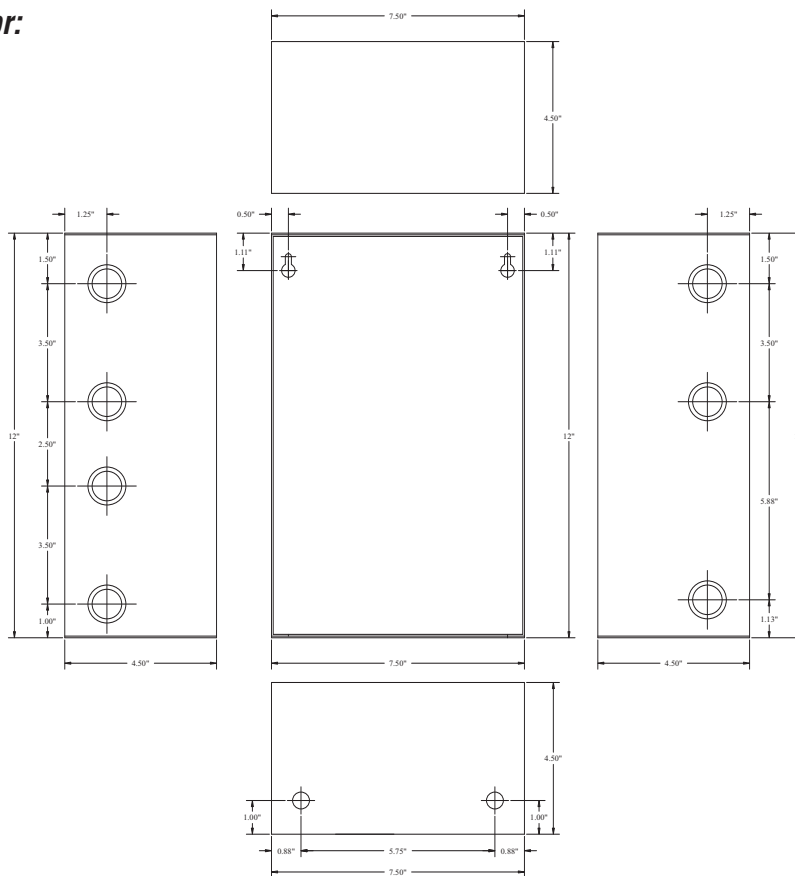

Enclosure Dimensions for:

• ALTV244ULX

13"H x 13.5"W x 3.25"D

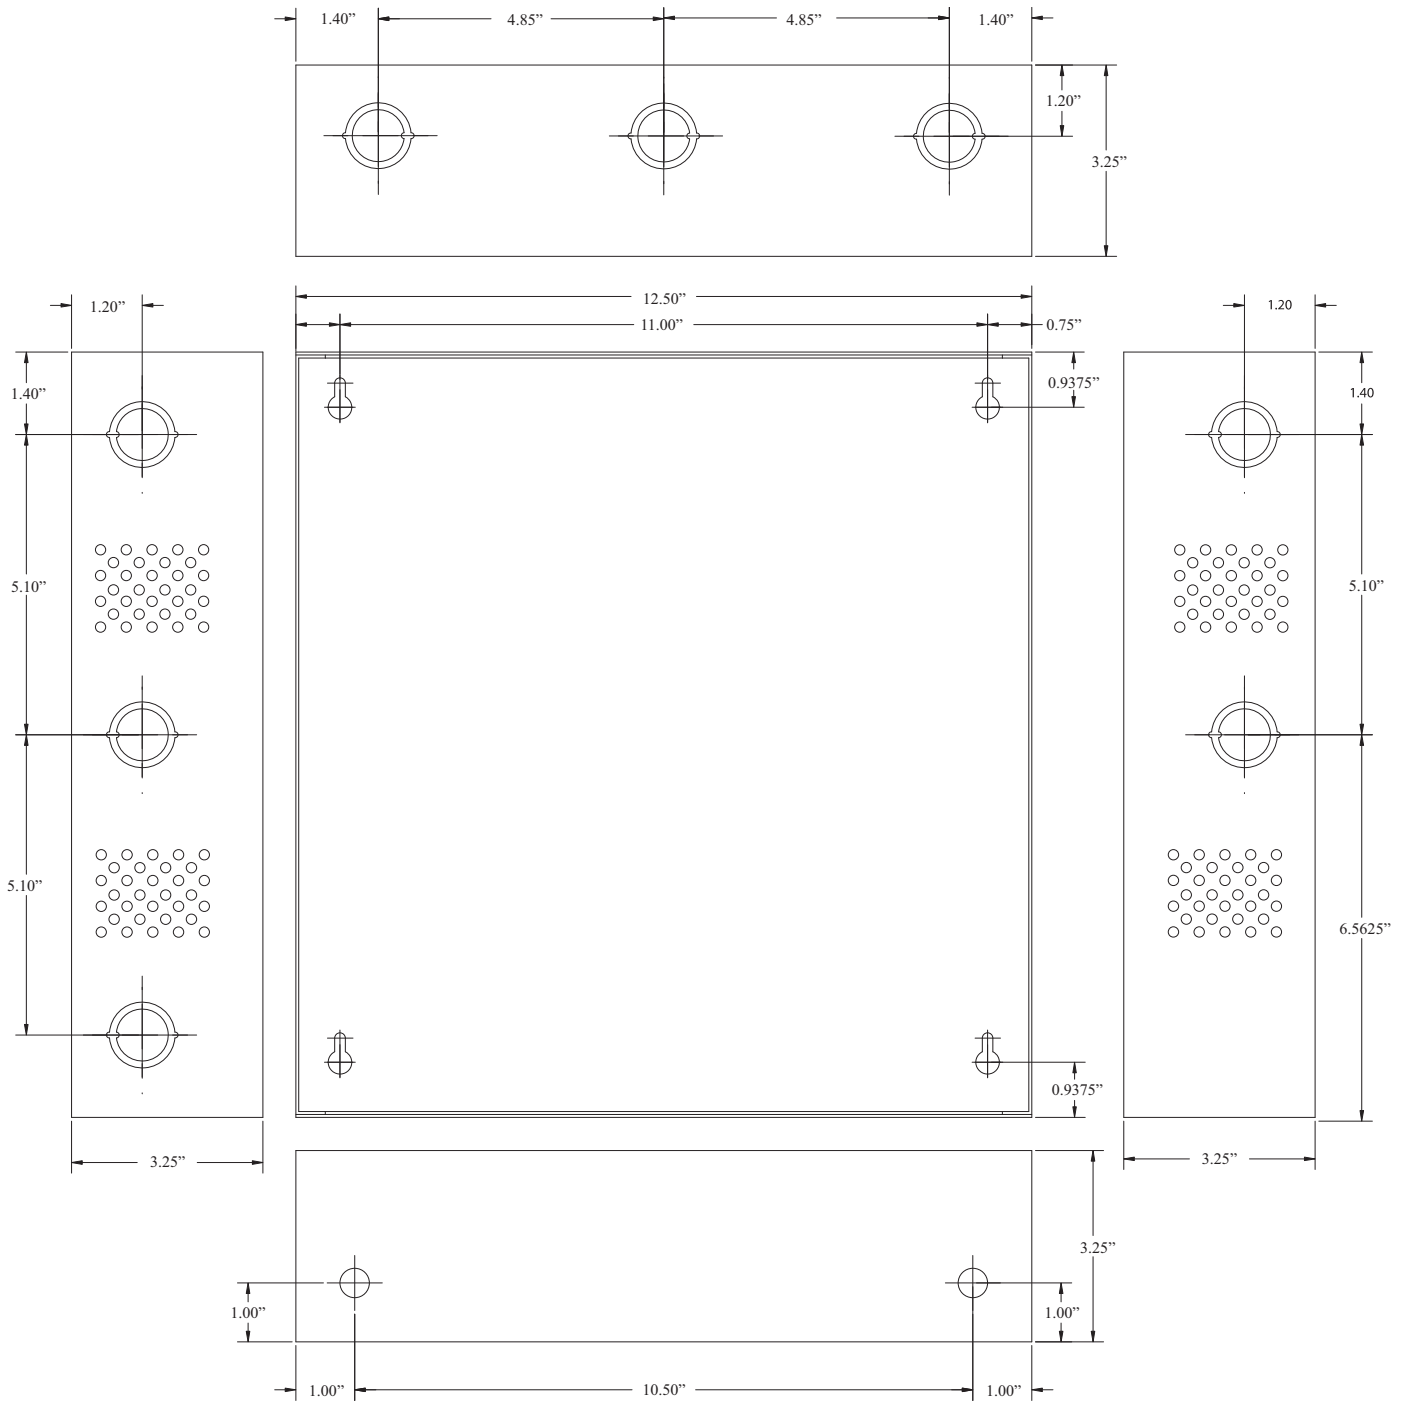

Altronix is not responsible for any typographical errors.

Altronix Corp.
 140 58th Street, Brooklyn, New York 11220 USA, 718-567-8181, fax: 718-567-9056
 web site: www.altronix.com, e-mail: info@altronix.com, Lifetime Warranty, Made in U.S.A.
 III1ALTV244ULSeries D04F

