


PowerFlex 753 AC Drive

Designed for general purpose applications, the PowerFlex 753 AC drive offers multiple options and features along with the added benefit of simple integration. The PowerFlex 753 comes standard with built-in I/O making it a cost effective solution ideal for OEMs and system integrators looking to reduce engineering costs, deliver machines to market faster and meet end-user demand for more productive and safer machines.

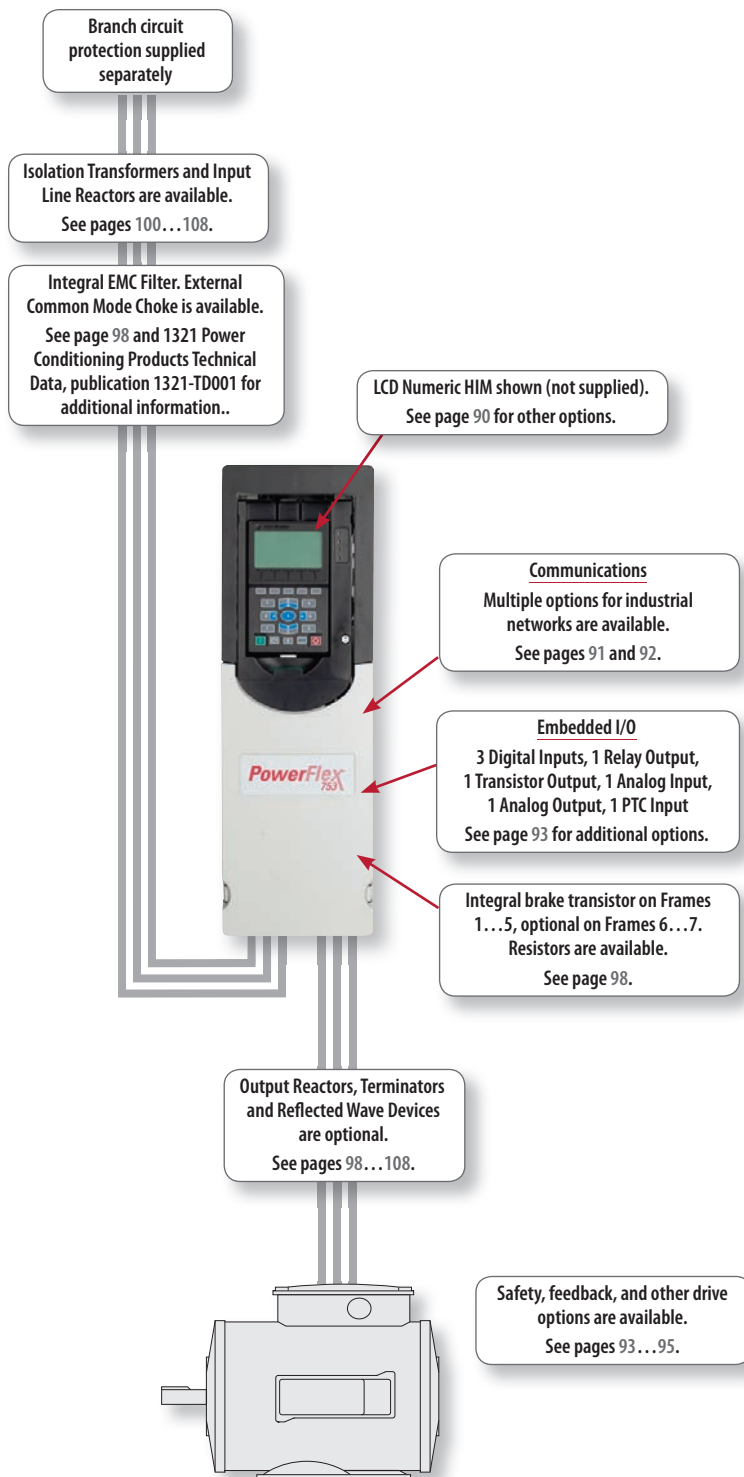

PowerFlex 753 at a glance

Ratings

380...480V:	0.75...270 kW / 1.0...400 Hp / 2.1...477 A
600V:	1.0...300 Hp / 1.7...289 A
690V:	7.5...250 kW / 12...263 A

Motor Control

- V/Hz Control
- Sensorless Vector Control
- Vector Control with FORCE Technology (with and without encoder)
- Interior Permanent Magnet with and without encoder

Enclosures

- IP00/IP20, NEMA/UL Type Open
- Flange Mount
- IP54/NEMA/UL Type 12

Safety

- Safe Torque-Off PLe/SIL3 Cat. 3
- Safe Speed Monitor PLe/SIL3 Cat. 4

Additional Features

- DeviceLogix
- Predictive Diagnostics
- Adjustable Voltage Control
- Three option slots for I/O, feedback, safety, auxiliary control power, communications
- Indexing
- Pump Jack and Pump Off for oil well applications
- Pjump and Traverse for Fibers application
- Conformal Coating
- DC Link Choke
- Automatic Device Configuration ⁽¹⁾

Certifications

- ATEX Certified with appropriate options
- c-UL-us
- CE
- EAC
- EPRI/SEMI F47
- FS ISO/EN13849-1 with Safe Torque-Off option
- KCC
- Marine (ABS, Lloyd's Register, and RINA)
- RCM
- RoHS compliant materials
- TÜV ⁽²⁾

Options

See pages 90...109


(1) Requires Dual-port EtherNet/IP Option Module (Cat. No. 20-750-ENETR), firmware V7, Studio 5000 Logix Designer, and Drive Add-On Profiles Version 4.04 or higher.

(2) Certification applies to 20-750-5 and 20-750-51 Safety Options when installed in drive.

Additional Information

PowerFlex 750-Series Brochure, publication 750-BR001
 PowerFlex 750-Series Technical Data, publication 750-TD001

Catalog Number Explanation

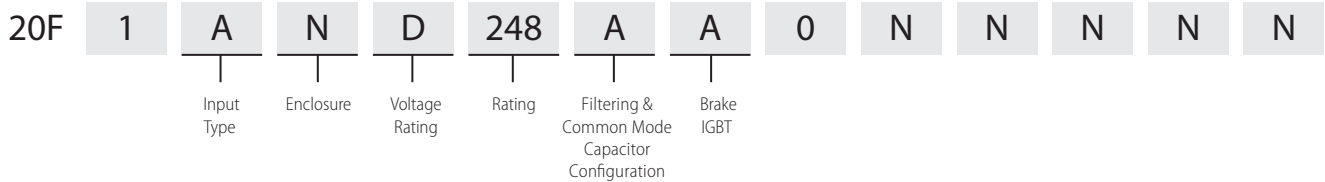

Product Selection

IP00/IP20, NEMA/UL Type Open ⁽¹⁾

380...480V AC, Three-Phase Drives

480V AC Input					400V AC Input					Frame Size		
Output Amps ⁽²⁾			Normal Duty Hp	Heavy Duty Hp	Cat. No.	Output Amps ⁽²⁾			Normal Duty kW		Heavy Duty kW	Cat. No. ⁽³⁾
Cont.	1 Min.	3 Sec.				Cont.	1 Min.	3 Sec.				
2.1	2.3	3.2	1	0.5	20F11RD2P1AA0NNNNN	2.1	2.3	3.2	0.75	0.37	20F11RC2P1JA0NNNNN	1
3.4	3.7	5.1	2	1.5	20F11RD3P4AA0NNNNN	3.5	3.9	5.3	1.5	0.75	20F11RC3P5JA0NNNNN	1
5	5.5	7.5	3	2	20F11RD5P0AA0NNNNN	5	5.5	7.5	2.2	1.5	20F11RC5P0JA0NNNNN	1
8	8.8	12	5	3	20F11RD8P0AA0NNNNN	8.7	9.6	13.1	4	2.2	20F11RC8P7JA0NNNNN	1
11	12.1	16.5	7.5	5	20F11RD014AA0NNNNN	11.5	12.7	17.3	5.5	4	20F11RC011JA0NNNNN	1
14	15.4	21	10	7.5	20F11RD014AA0NNNNN	15.4	16.9	23.1	7.5	5.5	20F11RC015JA0NNNNN	1
2.1	3.1	3.7	1	1	20F11ND2P1AA0NNNNN	2.1	3.1	3.7	0.75	0.75	20F11NC2P1JA0NNNNN	2
3.4	5.1	6.1	2	2	20F11ND3P4AA0NNNNN	3.5	5.2	6.3	1.5	1.5	20F11NC3P5JA0NNNNN	2
5	7.5	9	3	3	20F11ND5P0AA0NNNNN	5	7.5	9.0	2.2	2.2	20F11NC5P0JA0NNNNN	2
8	12	14.4	5	5	20F11ND8P0AA0NNNNN	8.7	13	15.6	4	4	20F11NC8P7JA0NNNNN	2
11	16.5	19.8	7.5	7.5	20F11ND011AA0NNNNN	11.5	17.2	20.7	5.5	5.5	20F11NC011JA0NNNNN	2
14 (11)	15.4 (16.5)	21 (21)	10	7.5	20F11ND014AA0NNNNN	15.4 (11.5)	16.9 (17.3)	23.1 (23.1)	7.5	5.5	20F11NC015JA0NNNNN	2
22 (14)	24.2 (21)	33 (33)	15	10	20F11ND022AA0NNNNN	22 (15.4)	24.2 (23.1)	33 (33)	11	7.5	20F11NC022JA0NNNNN	2
27 (22)	29.7 (33)	40.5 (40.5)	20	15	20F11ND027AA0NNNNN	30 (22)	33 (33)	45 (45)	15	11	20F11NC030JA0NNNNN	3
34 (27)	37.4 (40.5)	51 (51)	25	20	20F11ND034AA0NNNNN	37 (30)	40.7 (45)	55.5 (55.5)	18.5	15	20F11NC037JA0NNNNN	3
40 (34)	44 (51)	60 (61.2)	30	25	20F11ND040AA0NNNNN	43 (37)	47.3 (55.5)	64.5 (66.6)	22	18.5	20F11NC043JA0NNNNN	3
52 (40)	57.2 (60)	78 (78)	40	30	20F11ND052AA0NNNNN	60 (43)	66 (66)	90 (90)	30	22	20F11NC060JA0NNNNN	4
65 (52)	71.5 (78)	97.5 (97.5)	50	40	20F11ND065AA0NNNNN	72 (60)	79.2 (90)	108 (108)	37	30	20F11NC072JA0NNNNN	4
77 (65)	84.7 (97.5)	116 (117)	60	50	20F11ND077AA0NNNNN	85 (72)	93.5 (108)	128 (130)	45	37	20F11NC085JA0NNNNN	5
96 (77)	106 (116)	144 (144)	75	60	20F11ND096AA0NNNNN	104 (85)	114 (128)	156 (156)	55	45	20F11NC104JA0NNNNN	5
125 (96)	138 (144)	188 (188)	100	75	20F1AND125AN0NNNNN	140 (104)	154 (156)	210 (210)	75	55	20F1ANC140JN0NNNNN	6 ⁽⁴⁾
156 (125)	172 (188)	234 (234)	125	100	20F1AND156AN0NNNNN	170 (140)	187 (210)	255 (255)	90	75	20F1ANC170JN0NNNNN	6 ⁽⁴⁾
186 (156)	205 (234)	279 (281)	150	125	20F1AND186AN0NNNNN	205 (170)	226 (255)	308 (308)	110	90	20F1ANC205JN0NNNNN	6 ⁽⁴⁾
248 (186)	273 (279)	372 (372)	200	150	20F1AND248AN0NNNNN	260 (205)	286 (308)	390 (390)	132	110	20F1ANC260JN0NNNNN	6 ⁽⁴⁾
302 (248)	332 (372)	453 (453)	250	200	20F1AND302AN0NNNNN	302 (260)	332 (390)	453 (468)	160	132	20F1ANC302JN0NNNNN	7 ⁽⁴⁾
361 (302)	397 (453)	542 (544)	300	250	20F1AND361AN0NNNNN	367 (302)	404 (453)	551 (551)	200	160	20F1ANC367JN0NNNNN	7 ⁽⁴⁾
415 (361)	457 (542)	623 (650)	350	300	20F1AND415AN0NNNNN	456 (367)	502 (551)	684 (684)	250	200	20F1ANC456JN0NNNNN	7 ⁽⁴⁾
477 (361)	525 (542)	716 (650)	400	300	20F1AND477AN0NNNNN	477 (367)	525 (551)	716 (684)	270	200	20F1ANC477JN0NNNNN	7 ⁽⁴⁾

(1) Frames 2...5 are IP20, Frames 6...7 are IP00.
 (2) Some drives have dual current ratings; one for normal duty applications, and one for heavy duty applications (in parenthesis). The drive may be operated at either rating.
 (3) The 11th character determines default Filtering and Common Mode Cap jumper configuration. "J" = Installed, "A" = Removed.
 (4) Also available with internal Brake IGBT (20F1xxxxxx A xxxxxx).

IP00/IP20, NEMA/UL Type Open (continued)

Frames 3, 4 and 5 are 600V only drives. Frames 6 and 7 are dual voltage drives and can be operated at 600V or 690V AC.

Important: Frames 3, 4, and 5 must NOT be used in common DC input sharing applications with Frame 6 or larger drives. For details, contact your local Rockwell Automation sales office or Allen-Bradley Distributor.

DC Bus terminals are not supplied with AC input Frame 6 and 7 drives.

600V AC, Three-Phase Drives – IP20, NEMA/UL Type 1

Output Amps ⁽¹⁾			Normal Duty Hp	Heavy Duty Hp	Cat. No.	Frame Size
Cont.	1 Min.	3 Sec.				
1.7 (0.9)	1.9 (1.4)	2.6 (2.6)	1	0.5	20F11NE1P7AAONNNNN	3
2.7 (1.7)	3.0 (2.6)	4.1 (4.6)	2	1	20F11NE2P7AAONNNNN	3
3.9 (2.7)	4.3 (4.1)	5.9 (7.3)	3	2	20F11NE3P9AAONNNNN	3
6.1 (3.9)	6.7 (5.9)	9.2 (10.5)	5	3	20F11NE6P1AAONNNNN	3
9 (6.1)	9.9 (9.2)	13.5 (16.5)	7.5	5	20F11NE9P0AAONNNNN	3
11 (9)	12.1 (13.5)	16.5 (24.3)	10	7.5	20F11NE011AAONNNNN	3
17 (11)	18.7 (16.5)	25.5 (29.7)	15	10	20F11NE017AAONNNNN	3
22 (17)	24 (26)	33 (46)	20	15	20F11NE022AAONNNNN	3
27 (22)	30 (33)	41 (59)	25	20	20F11NE027AAONNNNN	4
32 (27)	35 (41)	48 (73)	30	25	20F11NE032AAONNNNN	4
41 (32)	45 (48)	62 (86)	40	30	20F11NE041AAONNNNN	5

(1) These drives have dual current ratings; one for normal duty applications, and one for heavy duty applications (in parenthesis). The drive may be operated at either rating.

600...690V AC, Three-Phase Drives – IP00, NEMA/UL Type Open

600V AC Input					690V AC Input					Frame Size		
Output Amps ⁽¹⁾			Normal Duty Hp	Heavy Duty Hp	Cat. No.	Output Amps ⁽¹⁾			Normal Duty kW		Heavy Duty kW	Cat. No. ⁽²⁾
Cont.	1 Min.	3 Sec.				Cont.	1 Min.	3 Sec.				
12 (9.1)	13.2 (13.7)	18 (18)	10 ⁽³⁾	7.5	20F1ANE012ANONNNNN	12 (9)	13.2 (13.5)	18 (18)	7.5	5.5	20F1ANF012JNONNNNN	6 ⁽⁴⁾
18 (11.1)	19.8 (16.7)	27 (27)	15 ⁽³⁾	10	20F1ANE018ANONNNNN	15 (11.5)	16.5 (17.3)	22.5 (22.5)	11	7.5	20F1ANF015JNONNNNN	6 ⁽⁴⁾
23 (18)	25.3 (27)	34.5 (34.5)	20 ⁽³⁾	15	20F1ANE023ANONNNNN	20 (15)	22 (22.5)	30 (30)	15	11	20F1ANF020JNONNNNN	6 ⁽⁴⁾
24 (22)	26.4 (33)	36 (39.6)	20 ⁽³⁾	20	20F1ANE024ANONNNNN	23 (20)	25.3 (30)	34.5 (36)	18.5	15	20F1ANF023JNONNNNN	6 ⁽⁴⁾
28 (23)	30.8 (34.5)	42 (42)	25 ⁽³⁾	20	20F1ANE028ANONNNNN	30 (23)	33 (34.5)	45 (45)	22	18.5	20F1ANF030JNONNNNN	6 ⁽⁴⁾
33 (28)	36.3 (42)	49.5 (50.4)	30 ⁽³⁾	25	20F1ANE033ANONNNNN	34 (30)	37.4 (45)	51 (54)	30	22	20F1ANF034JNONNNNN	6 ⁽⁴⁾
42 (33)	46.2 (49.5)	63 (63)	40 ⁽³⁾	30	20F1ANE042ANONNNNN	46 (34)	50.6 (51)	69 (69)	37	30	20F1ANF046JNONNNNN	6 ⁽⁴⁾
53 (42)	58.3 (63)	79.5 (79.5)	50 ⁽³⁾	40	20F1ANE053ANONNNNN	50 (46)	55 (69)	75 (82.8)	45	37	20F1ANF050JNONNNNN	6 ⁽⁴⁾
63 (52)	69.3 (78)	94.5 (94.5)	60	50	20F1ANE063ANONNNNN	61 (50)	67.1 (75)	91.5 (91.5)	55	45	20F1ANF061JNONNNNN	6 ⁽⁴⁾
77 (63)	84.7 (94.5)	116 (116)	75	60	20F1ANE077ANONNNNN	82 (61)	90.2 (91.5)	123 (123)	75	55	20F1ANF082JNONNNNN	6 ⁽⁴⁾
99 (77)	109 (116)	149 (149)	100	75	20F1ANE099ANONNNNN	98 (82)	108 (123)	147 (148)	90	75	20F1ANF098JNONNNNN	6 ⁽⁴⁾
125 (99)	138 (149)	188 (188)	125	100	20F1ANE125ANONNNNN	119 (98)	131 (147)	179 (179)	110	90	20F1ANF119JNONNNNN	6 ⁽⁴⁾
144 (125)	158 (188)	216 (225)	150	125	20F1ANE144ANONNNNN	142 (119)	156 (179)	213 (214)	132	110	20F1ANF142JNONNNNN	6 ⁽⁴⁾
192 (144)	211 (216)	288 (288)	200	150	20F1ANE192ANONNNNN	171 (142)	188 (213)	257 (257)	160	132	20F1ANF171JNONNNNN	7 ⁽⁴⁾
242 (192)	266 (288)	363 (363)	250	200	20F1ANE242ANONNNNN	212 (171)	233 (257)	318 (318)	200	160	20F1ANF212JNONNNNN	7 ⁽⁴⁾
289 (242)	318 (318)	434 (436)	300	250	20F1ANE289ANONNNNN	263 (212)	289 (289)	395 (395)	250	200	20F1ANF263JNONNNNN	7 ⁽⁴⁾

(1) These drives have dual current ratings; one for normal duty applications, and one for heavy duty applications (in parenthesis). The drive may be operated at either rating.

(2) The 11th character determines default Filtering and Common Mode Cap jumper configuration. "J" = Installed, "A" = Removed.

(3) Alternate 600V ratings when connected to drives 60 Hp and greater in common DC input applications with uncontrolled front ends.

(4) Also available with internal Brake IGBT (20F1xxxxxxx A xxxxxx).

Flange Mount

Front = IP20, NEMA/UL Type Open, Back/Heatsink = IP66, NEMA/UL Type 4X

380...480V AC, Three-Phase Drives

480V AC Input					400V AC Input					Frame Size		
Output Amps ⁽¹⁾			Normal Duty Hp	Heavy Duty Hp	Cat. No.	Output Amps ⁽¹⁾			Normal Duty kW		Heavy Duty kW	Cat. No. ⁽²⁾
Cont.	1 Min.	3 Sec.				Cont.	1 Min.	3 Sec.				
2.1	3.1	3.7	1	1	20F11FD2P1AA0NNNNN	2.1	3.1	3.7	0.75	0.75	20F11FC2P1JA0NNNNN	2
3.4	5.1	6.1	2	2	20F11FD3P4AA0NNNNN	3.5	5.2	6.3	1.5	1.5	20F11FC3P5JA0NNNNN	2
5	7.5	9	3	3	20F11FD5P0AA0NNNNN	5	7.5	9.0	2.2	2.2	20F11FC5P0JA0NNNNN	2
8	12	14.4	5	5	20F11FD8P0AA0NNNNN	8.7	13	15.6	4	4	20F11FC8P7JA0NNNNN	2
11	16.5	19.8	7.5	7.5	20F11FD011AA0NNNNN	11.5	17.2	20.7	5.5	5.5	20F11FC011JA0NNNNN	2
14 (11)	15.4 (16.5)	21 (21)	10	7.5	20F11FD014AA0NNNNN	15.4 (11.5)	16.9 (17.3)	23.1 (23.1)	7.5	5.5	20F11FC015JA0NNNNN	2
22 (14)	24.2 (21)	33 (33)	15	10	20F11FD022AA0NNNNN	22 (15.4)	24.2 (23.1)	33 (33)	11	7.5	20F11FC022JA0NNNNN	2
27 (22)	29.7 (33)	40.5 (40.5)	20	15	20F11FD027AA0NNNNN	30 (22)	33 (33)	45 (45)	15	11	20F11FC030JA0NNNNN	3
34 (27)	37.4 (40.5)	51 (51)	25	20	20F11FD034AA0NNNNN	37 (30)	40.7 (45)	55.5 (55.5)	18.5	15	20F11FC037JA0NNNNN	3
40 (34)	44 (51)	60 (61.2)	30	25	20F11FD040AA0NNNNN	43 (37)	47.3 (55.5)	64.5 (66.6)	22	18.5	20F11FC043JA0NNNNN	3
52 (40)	57.2 (60)	78 (78)	40	30	20F11FD052AA0NNNNN	60 (43)	66 (66)	90 (90)	30	22	20F11FC060JA0NNNNN	4
65 (52)	71.5 (78)	97.5 (97.5)	50	40	20F11FD065AA0NNNNN	72 (60)	79.2 (90)	108 (108)	37	30	20F11FC072JA0NNNNN	4
77 (65)	84.7 (97.5)	116 (117)	60	50	20F11FD077AA0NNNNN	85 (72)	93.5 (108)	128 (130)	45	37	20F11FC085JA0NNNNN	5
96 (77)	106 (116)	144 (144)	75	60	20F11FD096AA0NNNNN	104 (85)	114 (128)	156 (156)	55	45	20F11FC104JA0NNNNN	5

Note: Frames 6...7 require a user installed flange kit with an IP00, NEMA/UL Type Open drive.

(1) Some drives have dual current ratings; one for normal duty applications, and one for heavy duty applications (in parenthesis). The drive may be operated at either rating.

(2) The 11th character determines default Filtering and Common Mode Cap jumper configuration. "J" = Installed, "A" = Removed.

600V AC, Three-Phase Drives

Output Amps ⁽¹⁾			Normal Duty Hp	Heavy Duty Hp	Cat. No.	Frame Size
Cont.	1 Min.	3 Sec.				
1.7 (0.9)	1.9 (1.4)	2.6 (2.6)	1	0.5	20F11FE1P7AA0NNNNN	3
2.7 (1.7)	3.0 (2.6)	4.1 (4.6)	2	1	20F11FE2P7AA0NNNNN	3
3.9 (2.7)	4.3 (4.1)	5.9 (7.3)	3	2	20F11FE3P9AA0NNNNN	3
6.1 (3.9)	6.7 (5.9)	9.2 (10.5)	5	3	20F11FE6P1AA0NNNNN	3
9 (6.1)	9.9 (9.2)	13.5 (16.5)	7.5	5	20F11FE9P0AA0NNNNN	3
11 (9)	12.1 (13.5)	16.5 (24.3)	10	7.5	20F11FE011AA0NNNNN	3
17 (11)	18.7 (16.5)	25.5 (29.7)	15	10	20F11FE017AA0NNNNN	3
22 (17)	24 (26)	33 (46)	20	15	20F11FE022AA0NNNNN	3
27 (22)	30 (33)	41 (59)	25	20	20F11FE027AA0NNNNN	4
32 (27)	35 (41)	48 (73)	30	25	20F11FE032AA0NNNNN	4
41 (32)	45 (48)	62 (86)	40	30	20F11FE041AA0NNNNN	5
52 (41)	57 (62)	78 (111)	50	40	20F11FE052AA0NNNNN	5

(1) These drives have dual current ratings; one for normal duty applications, and one for heavy duty applications (in parenthesis). The drive may be operated at either rating.

IP54, NEMA/UL Type 12

380...480V AC, Three-Phase Drives

480V AC Input						400V AC Input						Frame Size
Output Amps ⁽¹⁾			Normal Duty Hp	Heavy Duty Hp	Cat. No.	Output Amps ⁽¹⁾			Normal Duty kW	Heavy Duty kW	Cat. No. ⁽²⁾	
Cont.	1 Min.	3 Sec.				Cont.	1 Min.	3 Sec.				
2.1	3.1	3.7	1	1	20F11GD2P1AA0NNNNN	2.1	3.1	3.7	0.75	0.75	20F11GC2P1JA0NNNNN	2
3.4	5.1	6.1	2	2	20F11GD3P4AA0NNNNN	3.5	5.2	6.3	1.5	1.5	20F11GC3P5JA0NNNNN	2
5	7.5	9	3	3	20F11GD5P0AA0NNNNN	5	7.5	9.0	2.2	2.2	20F11GC5P0JA0NNNNN	2
8	12	14.4	5	5	20F11GD8P0AA0NNNNN	8.7	13	15.6	4	4	20F11GC8P7JA0NNNNN	2
11	16.5	19.8	7.5	7.5	20F11GD011AA0NNNNN	11.5	17.2	20.7	5.5	5.5	20F11GC011JA0NNNNN	2
14 (11)	15.4 (16.5)	21 (21)	10	7.5	20F11GD014AA0NNNNN	15.4 (11.5)	16.9 (17.3)	23.1 (23.1)	7.5	5.5	20F11GC015JA0NNNNN	2
22 (14)	24.2 (21)	33 (33)	15	10	20F11GD022AA0NNNNN	22 (15.4)	24.2 (23.1)	33 (33)	11	7.5	20F11GC022JA0NNNNN	2
27 (22)	29.7 (33)	40.5 (40.5)	20	15	20F11GD027AA0NNNNN	30 (22)	33 (33)	45 (45)	15	11	20F11GC030JA0NNNNN	3
34 (27)	37.4 (40.5)	51 (51)	25	20	20F11GD034AA0NNNNN	37 (30)	40.7 (45)	55.5 (55.5)	18.5	15	20F11GC037JA0NNNNN	3
40 (34)	44 (51)	60 (61.2)	30	25	20F11GD040AA0NNNNN	43 (37)	47.3 (55.5)	64.5 (66.6)	22	18.5	20F11GC043JA0NNNNN	3
52 (40)	57.2 (60)	78 (78)	40	30	20F11GD052AA0NNNNN	60 (43)	66 (66)	90 (90)	30	22	20F11GC060JA0NNNNN	4
65 (52)	71.5 (78)	97.5 (97.5)	50	40	20F11GD065AA0NNNNN	72 (60)	79.2 (90)	108 (108)	37	30	20F11GC072JA0NNNNN	5
77 (65)	84.7 (97.5)	116 (117)	60	50	20F11GD077AA0NNNNN	85 (72)	93.5 (108)	128 (130)	45	37	20F11GC085JA0NNNNN	5
96 (77)	106 (116)	144 (144)	75	60	20F1AGD096AN0NNNNN	104 (85)	114 (128)	156 (156)	55	45	20F1AGC104JN0NNNNN	6 ⁽³⁾
125 (96)	138 (144)	188 (188)	100	75	20F1AGD125AN0NNNNN	140 (104)	154 (156)	210 (210)	75	55	20F1AGC140JN0NNNNN	6 ⁽³⁾
156 (125)	172 (188)	234 (234)	125	100	20F1AGD156AN0NNNNN	170 (140)	187 (210)	255 (255)	90	75	20F1AGC170JN0NNNNN	6 ⁽³⁾
186 (156)	205 (234)	279 (281)	150	125	20F1AGD186AN0NNNNN	205 (170)	226 (255)	308 (308)	110	90	20F1AGC205JN0NNNNN	6 ⁽³⁾
248 (186)	273 (279)	372 (372)	200	150	20F1AGD248AN0NNNNN	260 (205)	286 (308)	390 (390)	132	110	20F1AGC260JN0NNNNN	7 ⁽³⁾
302 (248)	332 (372)	453 (453)	250	200	20F1AGD302AN0NNNNN	302 (260)	332 (390)	453 (468)	160	132	20F1AGC302JN0NNNNN	7 ⁽³⁾
361 (302)	397 (453)	542 (544)	300	250	20F1AGD361AN0NNNNN	367 (302)	404 (453)	551 (551)	200	160	20F1AGC367JN0NNNNN	7 ⁽³⁾
415 (361)	457 (542)	623 (650)	350	300	20F1AGD415AN0NNNNN	456 (367)	502 (551)	684 (684)	250	200	20F1AGC456JN0NNNNN	7 ⁽³⁾

(1) Some drives have dual current ratings; one for normal duty applications, and one for heavy duty applications (in parenthesis). The drive may be operated at either rating.

(2) The 11th character determines default Filtering and Common Mode Cap jumper configuration. "J" = Installed, "A" = Removed.

(3) Also available with internal Brake IGBT (20F1xxxxxx A xxxxxx).

IP54, NEMA/UL Type 12 (continued)

Frames 3, 4 and 5 are 600V only drives. Frames 6 and 7 are dual voltage drives and can be operated at 600V or 690V AC.

Important: Frames 3, 4, and 5 must NOT be used in common DC input sharing applications with Frame 6 or larger drives. For details, contact your local Rockwell Automation sales office or Allen-Bradley Distributor.

DC Bus terminals are not supplied with AC input Frame 6 and 7 drives.

600V AC, Three-Phase Drives

Output Amps ⁽¹⁾			Normal Duty Hp	Heavy Duty Hp	Cat. No.	Frame Size
Cont.	1 Min.	3 Sec.				
1.7 (0.9)	1.9 (1.4)	2.6 (2.6)	1	0.5	20F11GE1P7AAONNNNN	3
2.7 (1.7)	3.0 (2.6)	4.1 (4.6)	2	1	20F11GE2P7AAONNNNN	3
3.9 (2.7)	4.3 (4.1)	5.9 (7.3)	3	2	20F11GE3P9AAONNNNN	3
6.1 (3.9)	6.7 (5.9)	9.2 (10.5)	5	3	20F11GE6P1AAONNNNN	3
9 (6.1)	9.9 (9.2)	13.5 (16.5)	7.5	5	20F11GE9P0AAONNNNN	3
11 (9)	12.1 (13.5)	16.5 (24.3)	10	7.5	20F11GE011AAONNNNN	3
17 (11)	18.7 (16.5)	25.5 (29.7)	15	10	20F11GE017AAONNNNN	3
22 (17)	24 (26)	33 (46)	20	15	20F11GE022AAONNNNN	3
27 (22)	30 (33)	41 (59)	25	20	20F11GE027AAONNNNN	4
32 (27)	35 (41)	48 (73)	30	25	20F11GE032AAONNNNN	4
41 (32)	45 (48)	62 (86)	40	30	20F11GE041AAONNNNN	5

(1) These drives have dual current ratings; one for normal duty applications, and one for heavy duty applications (in parenthesis). The drive may be operated at either rating.

600...690V AC, Three-Phase Drives

600V AC Input					690V AC Input					Frame Size		
Output Amps ⁽¹⁾			Normal Duty Hp	Heavy Duty Hp	Cat. No.	Output Amps ⁽¹⁾			Normal Duty kW		Heavy Duty kW	Cat. No. ⁽²⁾
Cont.	1 Min.	3 Sec.				Cont.	1 Min.	3 Sec.				
12 (9.1)	13.2 (13.7)	18 (18)	10 ⁽³⁾	7.5	20F1AGE012ANONNNNN	12 (9)	13.2 (13.5)	18 (18)	7.5	5.5	20F1AGF012JNONNNNN	6 ⁽⁴⁾
18 (11.1)	19.8 (16.7)	27 (27)	15 ⁽³⁾	10	20F1AGE018ANONNNNN	15 (11.5)	16.5 (17.3)	22.5 (22.5)	11	7.5	20F1AGF015JNONNNNN	6 ⁽⁴⁾
23 (18)	25.3 (27)	34.5 (34.5)	20 ⁽³⁾	15	20F1AGE023ANONNNNN	20 (15)	22 (22.5)	30 (30)	15	11	20F1AGF020JNONNNNN	6 ⁽⁴⁾
24 (22)	26.4 (33)	36 (39.6)	20 ⁽³⁾	20	20F1AGE024ANONNNNN	23 (20)	25.3 (30)	34.5 (36)	18.5	15	20F1AGF023JNONNNNN	6 ⁽⁴⁾
28 (23)	30.8 (34.5)	42 (42)	25 ⁽³⁾	20	20F1AGE028ANONNNNN	30 (23)	33 (34.5)	45 (45)	22	18.5	20F1AGF030JNONNNNN	6 ⁽⁴⁾
33 (28)	36.3 (42)	49.5 (50.4)	30 ⁽³⁾	25	20F1AGE033ANONNNNN	34 (30)	37.4 (45)	51 (54)	30	22	20F1AGF034JNONNNNN	6 ⁽⁴⁾
42 (33)	46.2 (49.5)	63 (63)	40 ⁽³⁾	30	20F1AGE042ANONNNNN	46 (34)	50.6 (51)	69 (69)	37	30	20F1AGF046JNONNNNN	6 ⁽⁴⁾
53 (42)	58.3 (63)	79.5 (79.5)	50 ⁽³⁾	40	20F1AGE053ANONNNNN	50 (46)	55 (69)	75 (82.8)	45	37	20F1AGF050JNONNNNN	6 ⁽⁴⁾
63 (52)	69.3 (78)	94.5 (94.5)	60	50	20F1AGE063ANONNNNN	61 (50)	67.1 (75)	91.5 (91.5)	55	45	20F1AGF061JNONNNNN	6 ⁽⁴⁾
77 (63)	84.7 (94.5)	116 (116)	75	60	20F1AGE077ANONNNNN	82 (61)	90.2 (91.5)	123 (123)	75	55	20F1AGF082JNONNNNN	6 ⁽⁴⁾
99 (77)	109 (116)	149 (149)	100	75	20F1AGE099ANONNNNN	98 (82)	108 (123)	147 (148)	90	75	20F1AGF098JNONNNNN	6 ⁽⁴⁾
125 (99)	138 (149)	188 (188)	125	100	20F1AGE125ANONNNNN	119 (98)	131 (147)	179 (179)	110	90	20F1AGF119JNONNNNN	6 ⁽⁴⁾
144 (125)	158 (188)	216 (225)	150	125	20F1AGE144ANONNNNN	142 (119)	156 (179)	213 (214)	132	110	20F1AGF142JNONNNNN	6 ⁽⁴⁾
192 (144)	211 (216)	288 (288)	200	150	20F1AGE192ANONNNNN	171 (142)	188 (213)	257 (257)	160	132	20F1AGF171JNONNNNN	7 ⁽⁴⁾
242 (192)	266 (288)	363 (363)	250	200	20F1AGE242ANONNNNN	212 (171)	233 (257)	318 (318)	200	160	20F1AGF212JNONNNNN	7 ⁽⁴⁾
289 (242)	318 (318)	434 (436)	300	250	20F1AGE289ANONNNNN	263 (212)	289 (289)	395 (395)	250	200	20F1AGF263JNONNNNN	7 ⁽⁴⁾

(1) These drives have dual current ratings; one for normal duty applications, and one for heavy duty applications (in parenthesis). The drive may be operated at either rating.

(2) The 11th character determines default Filtering and Common Mode Cap jumper configuration. "J" = Installed, "A" = Removed.

(3) Alternate 600V ratings when connected to drives 60 Hp and greater in common DC input applications with uncontrolled front ends.


(4) Also available with internal Brake IGBT (20F1xxxxxxx A xxxxxx).

Approximate Dimensions and Weights

Dimensions are in mm (in.) - weights are in kg (lb)

IP00/IP20, NEMA/UL Type Open

Frame	H	W	D	Weight
1	400.5 (15.77)	110.0 (4.33)	211.0 (8.31)	6.00 (12.75)
2	424.2 (16.70)	134.5 (5.30)	212.0 (8.35)	7.80 (17.2)
3	454.0 (17.87)	190.0 (7.48)	212.0 (8.35)	11.80 (26.1)
4	474.0 (18.66)	222.0 (8.74)	212.0 (8.35)	13.60 (30.0)
5	550.0 (21.65)	270.0 (10.63)	212.0 (8.35)	20.40 (45.0)
6	665.5 (26.20)	308.0 (12.13)	346.4 (13.64)	38.60 (85.0)
7	881.5 (34.70)	430.0 (16.93)	349.6 (13.76)	72.60...108.90 (160.0...240.0)

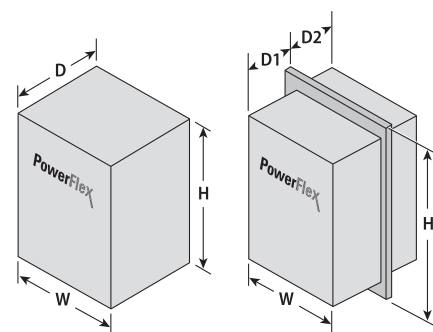

IP54, NEMA/UL Type 12

Frame	H	W	D	Weight ⁽¹⁾
2	543.2 (21.39)	215.3 (8.48)	222.2 (8.75)	8.00 (17.0)
3	551.0 (21.69)	268.0 (10.55)	220.1 (8.67)	12.00 (26.0)
4	571.0 (22.48)	300.0 (11.81)	220.1 (8.67)	14.00 (30.0)
5	647.0 (25.47)	348.0 (13.70)	220.1 (8.67)	20.00 (45.0)
6	1298.3 (51.11)	609.4 (23.99)	464.7 (18.30)	91.00 (200.0)
7	1614.0 (63.54)	609.4 (23.99)	464.7 (18.30)	162.00 (357.0)

(1) Weights are approximate. Refer to the PowerFlex 750-Series Technical Data for detailed weight information.

Flange Mount

Frame	H	W	D1	D2	Weight ⁽¹⁾
2	481.8 (18.97)	206.2 (8.12)	148.3 (5.84)	63.7 (2.51)	8.00 (17.0)
3	515.0 (20.28)	260.0 (10.24)	127.4 (5.02)	84.6 (3.33)	12.00 (26.0)
4	535.0 (21.06)	292.0 (11.50)	127.4 (5.02)	84.6 (3.33)	14.00 (30.0)
5	611.0 (24.06)	340.0 (13.39)	127.4 (5.02)	84.6 (3.33)	20.00 (45.0)
6	665.5 (26.20)	308.0 (12.13)	208.4 (8.20)	138.0 (5.43)	38.00 (84.0)
7	875.0 (34.45)	430.0 (16.93)	208.4 (8.20)	138.0 (5.43)	96.00 (212.0)

(1) Weights are approximate. Refer to the PowerFlex 750-Series Technical Data for detailed weight information.

PowerFlex 7-Class and AFE Options

Human Interface Modules



Description	Cat. No.	Used with PowerFlex Drive		AFE
		70	753/755	
No HIM (Blank Plate), Handheld/Local (Drive Mount)	20-HIM-A0	✓	✓	✓
LCD Display, Full Numeric Keypad, Handheld/Local (Drive Mount)	20-HIM-A3	✓		✓
LCD Display, Programmer Only, Handheld/Local (Drive Mount)	20-HIM-A5	✓		✓
Enhanced, LCD, Full Numeric Keypad, Handheld/Local (Drive Mount)	20-HIM-A6	✓	✓	✓
Remote (Panel Mount) LCD Display, Full Numeric Keypad ^{(1) (2)}	20-HIM-C35	✓		✓
Remote (Panel Mount) LCD Display, Programmer Only ^{(1) (2)}	20-HIM-C55	✓		✓
Enhanced, LCD, Full Numeric Keypad ^{(1) (2)}	20-HIM-C65	✓	✓	✓

(1) IP66, NEMA Type 4X/12—for indoor use only.

(2) Includes a 1202-C30 interface cable (3 m/9.8 ft) for connection to drive.

Human Interface Module (HIM) Accessories

Description	Cat. No.	Used with PowerFlex Drive		AFE
		70	753/755	
Bezel Kit for LCD HIMs, NEMA Type 1 ⁽¹⁾	20-HIM-B1	✓	✓	✓
PowerFlex HIM Interface Cable, 1 m (3.3 ft) ⁽²⁾	20-HIM-H10	✓	✓	✓
Comm Option Cable Kit (Male-Male)				
0.33 m (1.1 ft)	1202-C03	✓	✓	✓
1 m (3.3 ft)	1202-C10	✓	✓	✓
3 m (9.8 ft)	1202-C30	✓	✓	✓
9 m (29.5 ft)	1202-C90	✓	✓	✓
Cable Kit (Male-Female) ⁽³⁾				
0.33 m (1.1 ft)	1202-H03	✓	✓	✓
1 m (3.3 ft)	1202-H10	✓	✓	✓
3 m (9.8 ft)	1202-H30	✓	✓	✓
9 m (29.5 ft)	1202-H90	✓	✓	✓
DPI™ Cable Kit with Connectors, Tools and 100 m (328 ft) Cable	1202-CBL-KIT-100M	✓	✓	✓
DPI Cable Connector Kit	1202-TB-KIT-SET	✓	✓	✓
DPI/SCANport™ One to Two Port Splitter Cable	1203-S03	✓	✓	✓

(1) Includes a 1202-C30 interface cable (3 m/9.8 ft) for connection to drive.

(2) Required only when HIM is used as handheld or remote.

(3) Required in addition to 20-HIM-H10 for distances up to a total maximum of 10 m (32.8 ft).

Communication Option Kits

Description	Cat. No.	Used with PowerFlex Drive		AFE
		70	753/755	
BACnet/IP Option Module	20-750-BNETIP		✓	
BACnet® MS/TP RS485 Communication Adapter	20-COMM-B	✓		✓
Coaxial ControlNet™ Option Module	20-750-CNETC		✓	
ControlNet™ Communication Adapter (Coax)	20-COMM-C	✓	✓ ⁽¹⁾	✓
DeviceNet™ Option Module	20-750-DNET		✓	
DeviceNet™ Communication Adapter	20-COMM-D	✓	✓ ⁽¹⁾	✓
Dual-port EtherNet/IP Option Module	20-750-ENETR		✓	
EtherNet/IP™ Communication Adapter	20-COMM-E	✓	✓ ⁽¹⁾	✓
Dual-port EtherNet/IP™ Communication Adapter	20-COMM-ER	✓		✓
HVAC Communication Adapter	20-COMM-H	✓	✓ ⁽¹⁾	✓
CANopen® Communication Adapter	20-COMM-K	✓	✓ ⁽¹⁾	✓
LonWorks® Communication Adapter	20-COMM-L	✓	✓ ⁽¹⁾	✓
Modbus/TCP Communication Adapter	20-COMM-M	✓	✓ ⁽¹⁾	✓
Profibus DPV1 Option Module	20-750-PBUS		✓	
Single-port Profinet I/O Option Module	20-750-PNET		✓	
Dual-port Profinet I/O Option Module	20-750-PNET2P		✓	
PROFIBUS™ DP Communication Adapter	20-COMM-P	✓	✓ ⁽¹⁾	✓
ControlNet™ Communication Adapter (Fiber)	20-COMM-Q	✓	✓ ⁽¹⁾	✓
Remote I/O Communication Adapter ⁽²⁾	20-COMM-R	✓	✓ ⁽¹⁾	✓
RS485 DF1 Communication Adapter	20-COMM-S	✓	✓ ⁽¹⁾	✓
External Communications Kit Power Supply	20-XCOMM-AC-PS1	✓	✓	✓
DPI External Communications Kit	20-XCOMM-DC-BASE	✓	✓	✓
External DPI I/O Option Board ⁽³⁾	20-XCOMM-IO-OPT1	✓	✓	✓
Compact I/O Module (3 Channel)	1769-SM1	✓	✓	✓

(1) Requires a Communication Carrier Card (20-750-20COMM or 20-750-20COMM-F1). Refer to PowerFlex 750-Series Legacy Communication Compatibility for details.

(2) This item has Silver Series status.

(3) For use only with DPI External Communications Kits 20-XCOMM-DC-BASE.

PowerFlex 750-Series Legacy Communication Compatibility

Most legacy communication adapters (20-COMM) can be used with the PowerFlex 753/755. However, the restrictions stated below do apply.

Frame 1 - It is recommended that the 20-750-20COMM-F1 Communication Carrier Card only be installed in Port 4. Port 5 will not be accessible when this module is installed.

Frames 2 and larger - It is recommended that the 20-750-20COMM Communication Carrier Card be installed in Port 6. Using Port 4 or 5 will make the adjacent left port inaccessible to other option modules and may interfere with network cable connections.

Adapter		Accesses Ports 0...6 for I/O Connections (Implicit and Explicit Messaging)	Accesses Ports 7 and Higher (I/O, Explicit Messaging)	Supports Drive Add-on Profiles	Supports Asian- Languages ⁽¹⁾
Cat. No.	Type				
20-COMM-B	BACnet MS/TP	Not Compatible			
20-COMM-C	ControlNet (Coax)	✓ v3.001 ⁽²⁾	✓ v3.001 ⁽²⁾	✓ ⁽³⁾	✓ v3.001 ⁽²⁾
20-COMM-D	DeviceNet	✓ ⁽⁴⁾	Not Compatible		
20-COMM-E	EtherNet/IP	✓ v4.001 ⁽²⁾	✓ v4.001 ⁽²⁾	✓ ⁽³⁾	✓ v4.001 ⁽²⁾
20-COMM-H	RS-485 HVAC	✓ v2.009 ^{(5) (2)}	Not Compatible		
20-COMM-K	CANopen	✓ v1.001 ⁽²⁾			
20-COMM-L	LonWorks	✓ v1.007 ⁽²⁾			
20-COMM-M	Modbus/TCP	✓ v2.001 ⁽²⁾	✓ v2.001 ⁽²⁾	Not Compatible	✓ v2.001 ⁽²⁾
20-COMM-P	ControlNet (Fiber)	✓ v1.006 ⁽²⁾	✓ v1.006 ⁽²⁾		Not Compatible
20-COMM-Q	PROFIBUS DP	✓ v3.001 ⁽²⁾	✓ v3.001 ⁽²⁾	✓ ⁽³⁾	✓ v3.001 ⁽²⁾
20-COMM-R ⁽⁶⁾	Remote I/O	✓ ⁽⁴⁾	Not Compatible		
20-COMM-S	RS-485 DF1	✓ ⁽⁴⁾			

- (1) Chinese, Japanese, and Korean languages are supported at the time of publication.
- (2) Requires this adapter firmware version or higher.
- (3) Requires firmware version v1.05 or higher of the drive Add-on Profiles for Studio 5000 Logix Designer software.
- (4) Controller must be capable of reading/writing 32-bit floating point (REAL) values.
- (5) Supports all three modes of operation (RTU, P1, N2).
- (6) This item has Silver Series status.

Communication Accessories

Description	Cat. No.	Used with PowerFlex Drive		AFE
		70	753/755	
Serial Null Modem Adapter	1203-SNM	✓	✓	✓
Smart Self-powered Serial Converter (RS232) includes 1203-SFC and 1202-C10 Cables	1203-SSS	✓	✓	✓
Universal Serial Bus™ (USB) Converter includes 2m USB, 20-HIM-H10 and 22-HIM-H10 Cables	1203-USB	✓	✓	✓
ControlNet T-tap Straight	1786-TPS		✓	
Communication Carrier Card for PowerFlex 750-Series Frame 1 drives	20-750-20COMM-F1		✓	
Communication Carrier Card for PowerFlex 750-Series Frame 2 or higher drives	20-750-20COMM		✓	

I/O Option Kits

Description	Cat. No.	Used with PowerFlex Drive		AFE
		70	753/755	
ATEX Option Module with 1 Thermosensor Input Connection (requires 11-Series I/O Module below)	20-750-ATEX		✓ ⁽¹⁾	
24V DC 11-Series I/O Module with 1 Analog In, 1 Analog Out, 3 Digital In and 2 Relay Outputs	20-750-1132C-2R		✓ ⁽¹⁾	
24V DC 11-Series I/O Module with 1 Analog In, 1 Analog Out, 3 Digital In, 1 Relay and 2 Transistor Outputs	20-750-1133C-1R2T		✓ ⁽¹⁾	
115V AC 11-Series I/O Module with 1 Analog In, 1 Analog Out, 3 Digital In and 2 Relay Outputs	20-750-1132D-2R		✓ ⁽¹⁾	
24V DC 22-Series I/O Module with 2 Analog In, 2 Analog Out, 6 Digital In and 2 Relay Outputs	20-750-2262C-2R		✓ ⁽¹⁾	
115V AC 22-Series I/O Module with 2 Analog In, 2 Analog Out, 6 Digital In and 2 Relay Outputs	20-750-2262D-2R		✓ ⁽¹⁾	
24V DC 22-Series I/O Module with 2 Analog In, 2 Analog Out, 6 Digital In, 3 Digital Out, 1 Relay and 2 Transistor Outputs	20-750-2263C-1R2T		✓ ⁽¹⁾	

(1) I/O option kits are not allowed in CIP motion mode.

Safety Options

Description	Cat. No.	Used with PowerFlex Drive	
		70	753/755
DriveGuard Safe Torque-Off	20A-DG01	✓	
Safe Torque-Off	20-750-S		✓ ⁽¹⁾
Safe Speed Monitor	20-750-S1		✓ ⁽¹⁾⁽²⁾

(1) Drive can accommodate only one option.

(2) Requires the Dual Incremental Encoder or Universal Feedback Option. Also requires the 20-750-EMCSSM1-F8 EMC Option Kit with Frame 8...9 drives.

Feedback Options

Description	Cat. No.	Used with PowerFlex Drive	
		70	753/755
5V/12V Encoder ⁽¹⁾	20A-ENC-1	✓	
Incremental Encoder	20-750-ENC-1		✓ ⁽²⁾
Dual Incremental Encoder	20-750-DENC-1		✓ ⁽²⁾
Universal Feedback (includes Stegmann, Heidenhain, SSI, Biss, 5V Incremental)	20-750-UFB-1		✓ ⁽³⁾

(1) Works only with PowerFlex 70 Enhanced Control.

(2) Homing and registration functions are not supported when using this device with Studio 5000 Logix Designer embedded motion instructions. To use these functions, the Universal Feedback Board (20-750-UFB-1) must be used.

(3) PowerFlex 755 only.

PowerFlex 750-Series Option Kits

	Description	Frame	Cat. No.	Used with PowerFlex Drive		
				70	753/755	
Auxiliary Power Supply	24V Aux Power Supply	1...7 ⁽¹⁾	20-750-APS		✓	
DC Bus Bar Option Kit	DC Bus Bars for 380...480V AC drives	6	20-750-DCBB1-F6		✓	
		7	20-750-DCBB1-F7		✓	
	DC Bus Bars for 600...690V AC drives	6	20-750-DCBB2-F6		✓	
		7	20-750-DCBB2-F7		✓	
DC Bus Connection Kit	Connects the drive DC bus terminals to the cabinet bus rails.	8...10	20-750-BUS1A-F8		✓	
EMC Option Kit	EMC Plate with Core for 380...480V AC drives	1	20-750-EMC1-F1		✓	
		2	20-750-EMC1-F2		✓	
		3	20-750-EMC1-F3		✓	
	EMC Plate with Core for 600V AC drives	3	20-750-EMC3-F3		✓	
		EMC Plate with Cores for 380...480V AC drives	4	20-750-EMC1-F4		✓
	5		20-750-EMC1-F5		✓	
	EMC Plate with Cores for 600V AC drives	4	20-750-EMC3-F4		✓	
		5	20-750-EMC3-F5		✓	
	EMC Core for 380...480V AC drives	1	20-750-EMC2-F1		✓	
		2	20-750-EMC2-F2		✓	
		3	20-750-EMC2-F3		✓	
	EMC Core for 600V AC drives	3	20-750-EMC4-F3		✓	
		EMC Cores for 380...480V AC drives	4...5	20-750-EMC2-F45		✓
	EMC Cores for 600V AC drives		4	20-750-EMC4-F4		✓
			5	20-750-EMC4-F5		✓
	EMC Plate with Cores for 600...690V AC drives	6	20-750-EMC3-F6		✓	
		7	20-750-EMC3-F7		✓	
	EMC Plate with Cores for 600...690V AC drives (IP54 Only)	6	20-750-EMC5-F6		✓	
		7	20-750-EMC5-F7		✓	
	EMC Core – Inverter-mounted output, for 380...690V AC input and DC input drives.	8...10	20-750-EMCCM1-F8		✓	
EMC Core – Cabinet-mounted input, for 380...690V Common DC Input drives only.	8...10	20-750-CBPEMCCM1-F8		✓		
EMC Core – Cabinet-mounted input, for 380...690V AC input drives only.	8...10	20-750-EMCCM1-F9		✓		
EMC Cores – Required when using the Safe Speed Monitor option 20-750-S1 with 380...690V drives.	8...10	20-750-EMCSSM1-F8		✓		
Door Shielding Kit		10	20-750-EMCDK1-F10		✓	
Exhaust Hood	Exhaust Hood – IP20, NEMA/UL Type 1 drives.	8	20-750-HOOD1-F8		✓	
Flange Adapter Kit	Converts Open Type drive to external heatsink (flange) with NEMA/UL Type 1 integrity backside. This kit is for use with IP20, NEMA/UL Type 0 drives and will not provide an air-tight or water-tight seal. Where sealing is required (e.g. contaminated, dirty or wet environments), a drive with an "F" enclosure option must be used.	2	20-750-FLNG1-F2		✓	
		3	20-750-FLNG1-F3		✓	
		4	20-750-FLNG1-F4		✓	
		5	20-750-FLNG1-F5		✓	
	Converts Open Type drive to external heatsink (flange) with NEMA/UL Type 4X/12 integrity backside.	6	20-750-FLNG4-F6		✓	
		7	20-750-FLNG4-F7		✓	
L Bus Bar Kit	Includes three L-brackets	8...10	20-750-LBRKT1		✓	
NEMA/UL Type 1 Option Kit	NEMA/UL Type 1 Kit	1	20-750-NEMA1-F1		✓	
		2	20-750-NEMA1-F2		✓	
		3	20-750-NEMA1-F3		✓	
		4	20-750-NEMA1-F4		✓	
		5	20-750-NEMA1-F5		✓	
		6	20-750-NEMA1-F6		✓	
		7	20-750-NEMA1-F7		✓	
Power Terminal Extension	Allows connection of two parallel leads to the AC terminals.	6	20-750-ACTE1-F6		✓	

continued

PowerFlex 750-Series Option Kits (continued)

Description		Frame	Cat. No.	Used with PowerFlex Drive	
				70	753/755
Power Terminal Guard	Provides additional protection against contact with the power terminals.	6	20-750-PTG1-F6		✓
		7	20-750-PTG1-F7		✓
Remote Control POD Mounting Kit	Hardware, fiber-optic, and power supply cables to remotely mount the control POD up to 23 m (75 ft) from the drive.	8...10	20-750-RPD1-F8		✓
Roll-Out Cart	A wheeled roll-out cart that facilitates drive installation and removal. Required for Frame 8 and larger drives.	8...10	20-750-CART1-F8		✓

(1) Frame 8 and up drives can be powered from an external 24V DC source, a 20-750-APS is not required.

Other Options

Description	Cat. No.	Used with PowerFlex Drive	
		70	753/755
115V AC Interface	AK-M9-115VAC-1	✓	
Frame E Flange Gasket	AK-M9-GASKET1-E4	✓	
Service Connection Board ⁽¹⁾	SK-M9-SCB1	✓	

(1) Provides temporary DPI/HIM connection for NEMA/UL Type 1 and Flange drives with cover removed.