

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets							
	LED				Fluorescent			
	Frame-In Kit	Installation Type	Lamping	Height	Frame-In Kit	Installation Type	Lamping	Height
<b>1076</b> Matte Black	<b>1001LED</b>	Non-IC	LED	6 3/4"	<b>1001F13U Series</b>	UniFrame™	(1) Triple 13W (GX24q-1)	5 7/8"
	<b>1001LEDEM</b>	Non-IC EM	LED	6 3/4"		Non-IC		
	<b>1001LEDREM</b>	Non-IC Remodeler	LED	6 3/4"				
	<b>L56LED</b>	Non-IC Retrofit	LED	6 3/4"				
<b>1076WH</b> Gloss White	Incandescent				<b>1001F18U Series</b>	UniFrame™ Non-IC	(1) Triple 18W (GX24q-2)	5 7/8"
	Frame-In Kit	Installation Type	Lamping	Height	<b>1004F13 Series</b>	IC	(1) Quad/Triple 13W (GX24q-2)	7 1/2"
	<b>1000P1</b> <b>1002P1</b>	Non-IC	60W A19 75W PAR30* 75W BR30	6 3/4"	<b>1004F18** Series</b>	IC	(1) Quad/Triple 18W (GX24q-2)	7 1/2"
	<b>1003R</b>	Non-IC Remodeler	60W A19 75W PAR30* 85W BR30	6 3/4"	<b>1004F26** Series</b>	IC	(1) Quad/Triple 26W (GX24q-2)	7 1/2"
	<b>1000IC</b> <b>1000AICM</b>	IC IC AirSeal®	40W A19 65W BR30 75W PAR30	7 5/16" 7 5/16"	<b>1001F13ICU/N</b>	Performance IC	(1) Triple 13W (GX24q-1)	7 1/4"
	<b>1004ICX/N</b>	IC AirSeal®	40W A19 75W PAR30* 65W BR30	7 1/4"	<b>1001F18ICU/N</b>	Performance IC	(1) Triple 18W (GX24q-2)	7 1/4"
	<b>1004IC/N</b> <b>1004ICR</b>	IC IC Remodeler	50W PAR30 60W BR30	7 1/2" 7 1/2"	*(Use Socket Extender with Short Neck) **Lightolier recommends the use of triple tube lamps			
	<b>1004IC/N</b> <b>1004ICR</b>	Non-IC Non-IC Remodeler	65W BR30 75W PAR30 40W A19	7 1/2" 7 1/2"				
	<b>1004SIC/N</b> <b>1004SICR</b>	IC IC Remodeler	50W PAR30* 60W BR30	5 1/2" 5 1/2"				
	<b>1004SIC/N</b> <b>1004SICR</b>	Non-IC Non-IC Remodeler	75W PAR30* 75W BR30	5 1/2" 5 1/2"				

## Features

- Reflector:** Hydroformed aluminum, .040" thick (18 ga.): non-yellowing, scratch resistant Perma White finish, 88% reflectance; white trim flange.
- Step Baffle:** Molded high heat plastic with stepped conical surface for low brightness, matte black or gloss white finish.
- Frame-In Kit:** (1002P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.

## Options & Accessories


**Medium-Base PAR30**      **1968** - For use w/short neck PAR30 lamps in P1 and Lytening housings.  
**Socket Extender:**

## Labels

UL (Suitable for Damp Locations), I.B.E.W.


Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2011 Philips Group • G1111

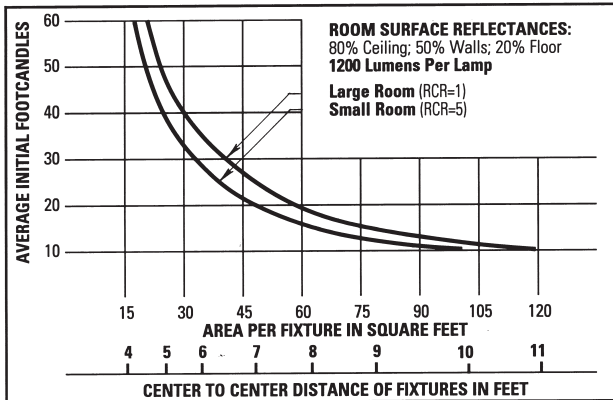

Use quick calculator chart to determine the spacing of 75 Watt PAR30 FL units (Black) for a desired level of illumination. Conversion Factors: 75W PAR30 FL, White, F.C. x 1.1.

**SPACING RATIO = 0.7**

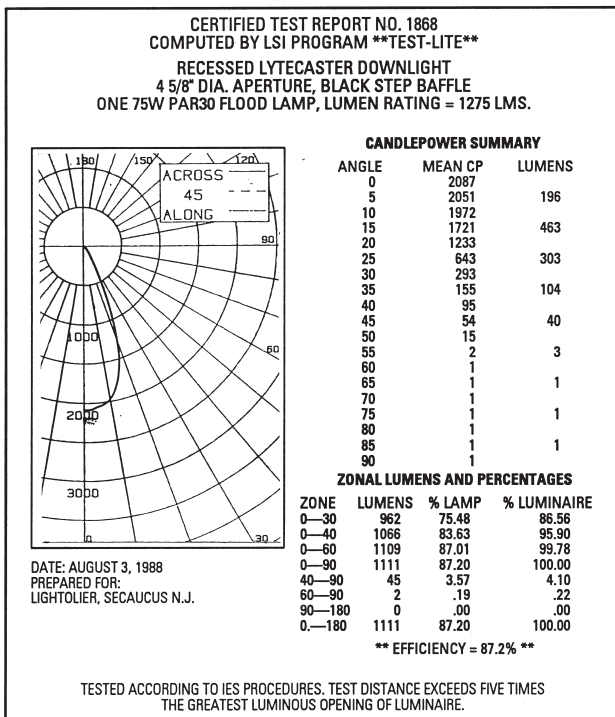

Conversion Factor: 75W PAR30 FL; White, C.U. x 1.1 65W BR30 FL; Black, C.U. x .75; White, C.U. x 1.0.

To convert lighting data for a lower wattage incandescent lamp of the same type, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps. The coefficients of utilization remain the same.

**Job Information** **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
www.lightolier.com © 2011 Philips Group • G1111