


# powerplug<sup>®</sup> Luminaire Disconnect

Wire Connectors

- Meets new NEC and CEC code changes for non-residential fluorescent luminaires
- Perfect for OEM new lighting installation or retrofit lighting applications
- Meets UL and CSA finger-probe safety requirements
- Allows safe disconnect of hot and neutral ballast wiring

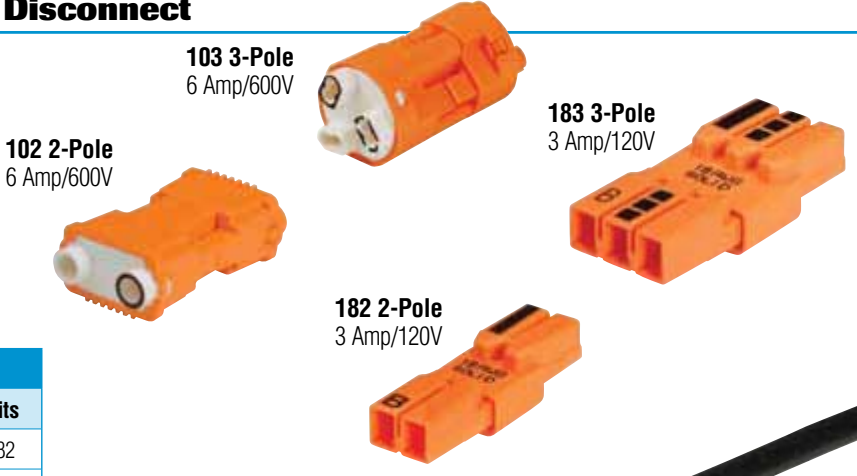

PowerPlug <sup>®</sup> Selection Chart		
Application	New Installations	Retrofits
For 1-ballast fixtures	102	102, 182
For 2-ballast, dimming and switching fixtures	103	103, 183

Color-coded ends:  
White = Ballast Side  
Orange = Line Side

3/8" strip length indicator

All models fit through 1/2" knockout

Disconnects safely, "touch-safe" per UL 2459

Patented IDEAL push-in technology quickly locks wires in place

Model	Color	Electrical Rating	Wire Range	Line Side	Ballast Side	Quantity	Cat. No.
102 2-wire	Orange	6 Amps/600 Volts Max.	Solid	#12 – #18		Card of 25	<b>30-372</b>
			Stranded	#12 – #14 (≤19 str.)		Jar of 75	<b>30-382J</b>
			Stranded Tin-Bonded	#12 – #14 (≤19 str.)		Jar of 150	<b>30-352J</b>
				#16 (≤26 str.) #18 (≤16 str.)		Box of 1,000	<b>30-102</b>
103 3-Wire	Orange	6 Amps/600 Volts Max.	Solid	#12 – #18	#18	Card of 20	<b>30-383X</b>
			Stranded	#12 – #14 (≤19 str.)	None	Jar of 50	<b>30-383XJ</b>
			Stranded Tin-Bonded	#12 – #14 (≤19 str.)		Jar of 100	<b>30-353XJ</b>
				#16 (≤26 str.) #18 (≤16 str.)		Box of 1,000	<b>30-103X</b>
182 2-wire	Orange	3 Amps 120V 1.3 Amps 277V 1 Amps 347V 0.75 Amps 480V 0.60 Amps 600V	Solid	#18	Box of 100	<b>30-082</b>	
Box of 2,500					<b>30-682</b>		
Box of 1,000 w/6" leads					<b>30-682L</b>		
183 3-Wire	Orange				Box of 100	<b>30-083</b>	
Box of 2,500					<b>30-683</b>		

1,000V maximum fixtures and signs.

