

1MM and 3MM Metering Stack Modules



Contents

<i>Description</i>	<i>Page</i>
Systems for Residential and Commercial Applications	V1-T5-92
Meter Packs	V1-T5-94
Type CCV 120/240V Tenant Main Circuit Breaker.	V1-T5-99
Meter Packs—1MP, 1MM and 3MM Main Tenant Circuit Breakers	V1-T5-100
Main Service Modules	V1-T5-101
Surge Metering	V1-T5-115
Residential Meter Stacks	
1MP, 1MM and 3MM Main Tenant Circuit Breakers	V1-T5-125
Phase Balanced Stack	V1-T5-126
Commercial Meter Stack Modules	V1-T5-127
35MM, 37MM, 35SS and 37SS Main Tenant Circuit Breakers.	V1-T5-134

Residential Meter Stacks

Features, Benefits and Functions

A. Barrier

Meter socket and tenant main breaker/wireway sections are separated by a solid metal barrier to guard un-metered bus against power theft.

B. Tenant Breaker

Reliable bus bar-to-bus bar connection. 200A modules accept bolt-on breakers 60–200A. 125A modules accept 15–125A plug-on breakers.

C. Moveable Phase Connector

Four-wire horizontal bus lets you use any 3MM module for single- or three-phase incoming service. Shipped with A and B phase connection, phase balancing is easily accomplished in the field by moving one, front-accessible phase connector post per module.

D. Neutral Assembly

A convenient termination for neutral conductors is in the wireway of each module.

E. Enclosed Horizontal Bus

Added security because a non-removable barrier encloses the 800 or 1200A horizontal bus passing through tenant breaker section.

F. Equipment Ground Bar

Factory installed in side gutter, a standard feature that's moveable to the top or bottom gutter.

G. Raintight Cap

Shipped on each outdoor meter module and main device.

H. Knockouts

Tangential in bottom endwall.

I. Superior Finish

Rust inhibiting phosphate primer and gray baked enamel is standard. All outdoor enclosures are of galvanized steel construction.

J. Meter Socket

Our unique meter socket base is installed without any fasteners—reducing chances for hot spots, easily replaceable, and improves connection to vertical bus.

K. Bus Connection

Mains and modules slip together quickly and smoothly with front-accessible captive bolts securing the juncture without removing socket interiors or bus access plate. Main bus joint bolts torque to 25 foot pounds.


L. Separate Wireway Cover

Separate covers allow easy access to tenant breaker and wireway section, permit work on breakers or in wireway without disturbing meters or meter covers. (Not shown.)

M. Vertical Bus Bar


One-piece vertical bus bar from phase balancing joints to meter socket eliminating any chance for hot spots.

1MM Meter Stack Module

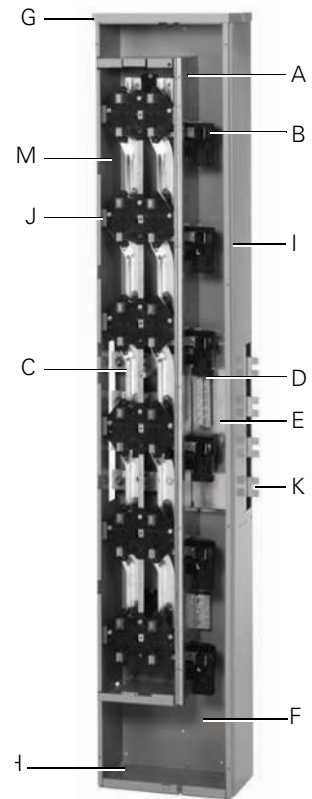

- Eaton's 1MM stacks are single-phase in, single-phase out design
- Eaton's 3MM stacks are three-phase in, single-phase out design
- Stacks with single-phase horizontal bus are rated 240/120V, single-phase, three-wire. Stacks with three-phase horizontal bus are rated 208Y/120V, three-phase, four-wire, but can be used on 240/120V, three-phase, four-wire delta systems
- All three-phase horizontal bus modules have four-wire cross bus, connected A-B phase to vertical bus, readily reconnectable for phase balance on installation
 - Note:** Individual sockets cannot be phase balanced, only each stack.
- Short-circuit ratings up to 100,000A rms symmetrical depending upon AIC rating of installed main tenant circuit breakers and main device
- Main tenant feeders can exit bottom or back. Knockouts are available at all exit locations
- If being used in outdoor application and exiting the top, mount Myer type hubs on rainproof cap
- Provision for two-pole breaker (plug-on type for 125A sockets and bolt-on type for 200A sockets)—circuit breakers not included
- Mechanically and electrically built to bolt-up with main service modules and commercial modular metering stacks
- Aluminum or copper bus
- 800 or 1200A horizontal bus
- All 3MM stacks include fifth jaw at 9 o'clock position
- All 1MM stacks do not include fifth jaw. Order 1MM5JK if needed

Catalog Number Selection

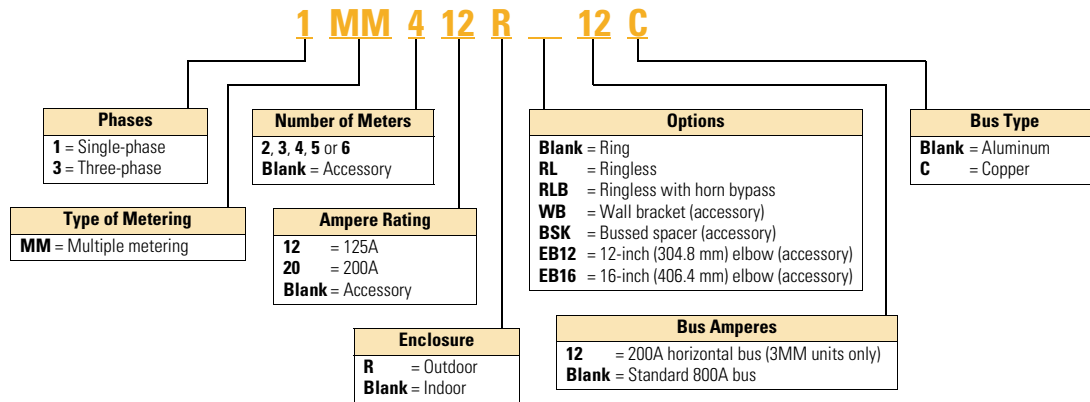

When Ordering:

- Determine catalog number of Main Service Module.
- Determine catalog number of Meter Stack (Residential or Commercial).
- Find quantity and catalog numbers for tenant circuit breakers (found on **Page V1-T5-125** or **V1-T5-135**). Order one breaker per socket.
- If any accessories are needed, order from **Pages V1-T5-136** through **V1-T5-137**.

Product Selection

1MM and 3MM
Metering Stack
Modules



5

800A Horizontal Aluminum Bus—Standard Offering

Amperes Per Meter Socket	Number of Meter Sockets	Bus Ampacity	Enclosure Type ①	Main Tenant Breaker Type (For Specific Catalog Numbers, Refer to Page V1-T5-125)	Single-Phase In, Single-Phase Out	Three-Phase In, Single-Phase Out
					Single-Phase Horizontal Bus (Three Horizontal Bus Bars— A, B and Neutral) ② Catalog Number	Three-Phase Horizontal Bus (Four Horizontal Bus Bars— A, B, C and Neutral) Catalog Number
Ring Style Meter Socket Covers						
125 ③	2 ④	800	Indoor/outdoor	BR2_	Use three-phase	3MM212R
	3 ④	800	Indoor/outdoor	BRH2_ BRHH2_	1MM312R	3MM312R
	4	800	Indoor/outdoor		1MM412R	3MM412R
	5	800	Indoor/outdoor		1MM512R	3MM512R
	6	800	Indoor/outdoor		1MM612R	3MM612R
	200 ⑤	2	800	Outdoor	CCV2_X, CHH2_H2X CHH2_H4X, CHH2_X	Use three-phase
3		800	Outdoor		1MM320R	3MM320R
4		800	Outdoor		1MM420R	3MM420R
5		800	Outdoor		1MM520R ⑥	3MM520R ⑥
Ringless Style Meter Socket Covers						
125	2	800	Outdoor	BR2_	Use three-phase	3MM212RRL
	3	800	Outdoor	BRH2_ BRHH2_	1MM312RRL	3MM312RRL
	4	800	Outdoor		1MM412RRL	3MM412RRL
	5	800	Outdoor		1MM512RRL	3MM512RRL
	6	800	Outdoor		1MM612RRL	3MM612RRL
	200	2	800	Outdoor	CCV2_X, CHH2_H2X CHH2_H4X, CHH2_X	Use three-phase
3		800	Outdoor		1MM320RRL	3MM320RRL
4		800	Outdoor		1MM420RRL	3MM420RRL
5		800	Outdoor		1MM520RRL ⑥	3MM520RRL ⑥
Ringless Style Covers with Horn Bypass						
125	2	800	Outdoor	BR2_	Use three-phase	3MM212RRLB
	3	800	Outdoor	BRH2_ BRHH2_	1MM312RRLB	3MM312RRLB
	4	800	Outdoor		1MM412RRLB	3MM412RRLB
	5	800	Outdoor		1MM512RRLB	3MM512RRLB
	6	800	Outdoor		1MM612RRLB	3MM612RRLB
	200	2	800	Outdoor	CCV2_X, CHH2_H2X CHH2_H4X, CHH2_X CHH2_H4X, CHH2_X	Use three-phase
3		800	Outdoor		1MM320RRLB	3MM320RRLB
4		800	Outdoor		1MM420RRLB	3MM420RRLB
5		800	Outdoor		1MM520RRLB ⑥	3MM520RRLB ⑥

Notes

- ① For indoor applications where a top endwall with knockouts is needed, order one of part number **MM12N1WLK** for each 125A stack or **MM20N1WLK** for each 200A stack.
- ② 1MM units do not come with 5th jaw.
- ③ To change in field from ring to ringless—order **1MMRC125**.
- ④ To change in field from ring to ringless, the top socket in 125A, two- and three-high stacks use **1MMRC125T**. Top socket only—other sockets see ③.
- ⑤ To change in field from ring to ringless—order **1MMRC200**.
- ⑥ Check with local utility for height requirements or restrictions.

1MM and 3MM Metering Stack Modules



800A Horizontal Copper Bus—Premium Offering

Amperes Per Meter Socket	Number of Meter Sockets	Bus Ampacity	Enclosure Type ①	Main Tenant Breaker Type (For Specific Catalog Numbers, Refer to Page V1-T5-125)	Single-Phase In, Single-Phase Out Single-Phase Horizontal Bus (Three Horizontal Bus Bars—A, B, C and Neutral) ② Catalog Number	Three-Phase In, Single-Phase Out Three-Phase Horizontal Bus (Four Horizontal Bus Bars—A, B, C and Neutral) Catalog Number
Ring Style Meter Socket Covers						
125 ③	2 ④	800	Outdoor	BR2_	Use three-phase	3MM212RC
	3 ④	800	Outdoor	BRH2_ BRHH2_	1MM312RC	3MM312RC
	4	800	Outdoor		1MM412RC	3MM412RC
	5	800	Outdoor		1MM512RC	3MM512RC
	6	800	Outdoor		1MM612RC	3MM612RC
200 ⑤	2	800	Outdoor	CCV2_X, CHH2_H2X CHH2_H4X, CHH2_X	Use three-phase	3MM220RC
	3	800	Outdoor		1MM320RC	3MM320RC
	4	800	Outdoor		1MM420RC	3MM420RC
	5	800	Outdoor		1MM520RC ⑥	3MM520RC ⑥
Ringless Style Meter Socket Covers						
125	2	800	Outdoor	BR2_	Use three-phase	3MM212RRLC
	3	800	Outdoor	BRH2_ BRHH2_	1MM312RRLC	3MM312RRLC
	4	800	Outdoor		1MM412RRLC	3MM412RRLC
	5	800	Outdoor		1MM512RRLC	3MM512RRLC
	6	800	Outdoor		1MM612RRLC	3MM612RRLC
200	2	800	Outdoor	CCV2_X, CHH2_H2X CHH2_H4X, CHH2_X	Use three-phase	3MM220RRLC
	3	800	Outdoor		1MM320RRLC	3MM320RRLC
	4	800	Outdoor		1MM420RRLC	3MM420RRLC
	5	800	Outdoor		1MM520RRLC ⑥	3MM520RRLC ⑥
Ringless Style Covers with Horn Bypass						
125	2	800	Outdoor	BR2_	Use three-phase	3MM212RRLBC
	3	800	Outdoor	BRH2_ BRHH2_	1MM312RRLBC	3MM312RRLBC
	4	800	Outdoor		1MM412RRLBC	3MM412RRLBC
	5	800	Outdoor		1MM512RRLBC	3MM512RRLBC
	6	800	Outdoor		1MM612RRLBC	3MM612RRLBC
200	2	800	Outdoor	CCV2_X, CHH2_H2X CHH2_H4X, CHH2_X	Use three-phase	3MM220RRLBC
	3	800	Outdoor		1MM320RRLBC	3MM320RRLBC
	4	800	Outdoor		1MM420RRLBC	3MM420RRLBC
	5	800	Outdoor		1MM520RRLBC ⑥	3MM520RRLBC ⑥

Notes

- ① For indoor applications where a top endwall with knockouts is needed, order (1) of part number **MM12N1WLK** for each 125A stack or **MM20N1WLK** for each 200A stack.
- ② 1MM units do not come with 5th jaw.
- ③ To change in field from ring to ringless—order **1MMRC125**.
- ④ To change in field from ring to ringless, the top socket in 125A, two- and three-high stacks use **1MMRC125T**. Top socket only—other sockets see ③.
- ⑤ To change in field from ring to ringless—order **1MMRC200**.
- ⑥ Check with local utility for height requirements or restrictions.

1MM and 3MM Metering Stack Modules



5

1200A Horizontal Aluminum Bus—Standard Offering

Amperes Per Meter Socket	Number of Meter Sockets	Bus Ampacity	Enclosure Type ①	Main Tenant Breaker Type (For Specific Catalog Numbers, Refer to Page V1-T5-116)	Three-Phase In, Single-Phase Out Three-Phase Horizontal Bus (Four Horizontal Bus Bars—A, B, C and Neutral) Catalog Number
Ring Style Meter Socket Covers					
125 ②	2 ③	1200	Indoor/outdoor	BR2_	3MM212R12
	3 ③	1200	Indoor/outdoor	BRH2_	3MM312R12
	4	1200	Indoor/outdoor	BRHH2_	3MM412R12
	5	1200	Indoor/outdoor		3MM512R12
	6	1200	Indoor/outdoor		3MM612R12
	200 ④	2	1200	Outdoor	CCV2_X, CHH2_H2X
3		1200	Outdoor	CHH2_H4X, CHH2_X	3MM320R12
4		1200	Outdoor		3MM420R12
5		1200	Indoor/outdoor		3MM520R12
Ringless Style Meter Socket Covers (5th Jaw at 9 o'Clock Standard—Field Adjustable to 3 or 6 o'Clock)					
125	2	1200	Outdoor	BR2_	3MM212R12RL
	3	1200	Outdoor	BRH2_	3MM312R12RL
	4	1200	Outdoor	BRHH2_	3MM412R12RL
	5	1200	Outdoor		3MM512R12RL
	6	1200	Outdoor		3MM612R12RL
	200	2	1200	Outdoor	CCV2_X, CHH2_H2X
3		1200	Outdoor	CHH2_H4X, CHH2_X	3MM320R12RL
4		1200	Outdoor		3MM420R12RL
5		1200	Outdoor		3MM520R12RL
Ringless Style Covers with Horn Bypass (5th Jaw at 9 o'Clock Standard—Field Adjustable to 3 or 6 o'Clock)					
125	2	1200	Outdoor	BR2_	3MM212R12RLB
	3	1200	Outdoor	BRH2_	3MM312R12RLB
	4	1200	Outdoor	BRHH2_	3MM412R12RLB
	5	1200	Outdoor		3MM512R12RLB
	6	1200	Outdoor		3MM612R12RLB
	200	2	1200	Outdoor	CCV2_X, CHH2_H2X
3		1200	Outdoor	CHH2_H4X, CHH2_X	3MM320R12RLB
4		1200	Outdoor		3MM420R12RLB
5		1200	Outdoor		3MM520R12RLB

1MM and 3MM Metering Stack Modules



1200A Horizontal Copper Bus—Premium Offering

Amperes Per Meter Socket	Number of Meter Sockets	Bus Ampacity	Enclosure Type ^①	Main Tenant Breaker Type (For Specific Catalog Numbers, Refer to Page V1-T5-116)	Three-Phase In, Single-Phase Out Three-Phase Horizontal Bus (Four Horizontal Bus Bars—A, B, C and Neutral) Catalog Number
Ring Style Meter Socket Covers					
125 ^②	2 ^③	1200	Indoor/outdoor	BR2_	3MM212R12C
	3 ^③	1200	Indoor/outdoor	BRH2_	3MM312R12C
	4	1200	Indoor/outdoor	BRHH2_	3MM412R12C
	5	1200	Indoor/outdoor		3MM512R12C
	6	1200	Indoor/outdoor		3MM612R12C
200 ^④	2	1200	Outdoor	CCV2_X, CHH2_H2X	3MM220R12C
	3	1200	Outdoor	CHH2_H4X, CHH2_X	3MM320R12C
	4	1200	Outdoor		3MM420R12C
	5	1200	Outdoor		3MM520R12C
Ringless Style Meter Socket Covers (5th Jaw at 9 o’Clock Standard—Field Adjustable to 3 or 6 o’Clock)					
125	2	1200	Outdoor	BR2_	3MM212R12RLC
	3	1200	Outdoor	BRH2_	3MM312R12RLC
	4	1200	Outdoor	BRHH2_	3MM412R12RLC
	5	1200	Outdoor		3MM512R12RLC
	6	1200	Outdoor		3MM612R12RLC
200	2	1200	Outdoor	CCV2_X, CHH2_H2X	3MM220R12RLC
	3	1200	Outdoor	CHH2_H4X, CHH2_X	3MM320R12RLC
	4	1200	Outdoor		3MM420R12RLC
	5	1200	Outdoor		3MM520R12RLC
Ringless Style Covers with Horn Bypass (5th Jaw at 9 o’Clock Standard—Field Adjustable to 3 or 6 o’Clock)					
125	2	1200	Outdoor	BR2_	3MM212R12RLBC
	3	1200	Outdoor	BRH2_	3MM312R12RLBC
	4	1200	Outdoor	BRHH2_	3MM412R12RLBC
	5	1200	Outdoor		3MM512R12RLBC
	6	1200	Outdoor		3MM612R12RLBC
200	2	1200	Outdoor	CCV2_X, CHH2_H2X	3MM220R12RLBC
	3	1200	Outdoor	CHH2_H4X, CHH2_X	3MM320R12RLBC
	4	1200	Outdoor		3MM420R12RLBC
	5	1200	Outdoor		3MM520R12RLBC

Technical Data and Specifications

Wire Sizes—Neutral and Ground Lugs

- Each stack includes a neutral and ground bar
- If an extra ground bar is needed, order **1MMGBK**

Wire Sizes—Neutral and Ground Lugs

Lugs in Meter Socket Modules	Wire Size, Al/Cu
Branch neutral—125A socket module	#6–2/0 kcmil
Branch neutral—200A socket module	#1/0–300 kcmil
Equipment ground bar—125A socket module	#14–#2 kcmil
Equipment ground bar—200A socket module	#14–2/0 kcmil
Optional ground bar (1MMGBK)	#6–2/0 kcmil

Notes

- ① For indoor applications where a top endwall with knockouts is needed, order (one) of part number **MM12N1WLK** for each 125A stack or **MM20N1WLK** for each 200A stack.
- ② To change in field from ring to ringless—order **1MMRC125**.
- ③ To change in field from ring to ringless, the top socket in 125A, two- and three-high stacks use **1MMRC125T**. Top socket only—other sockets see ②.
- ④ To change in field from ring to ringless—order **1MMRC200**.

5.11

Metering Products

Group Metering



Dimensions

Approximate Dimensions in Inches (mm)

Modular Metering Stacks—Aluminum and Copper

1MM, 3MM, 125 Amperes

5

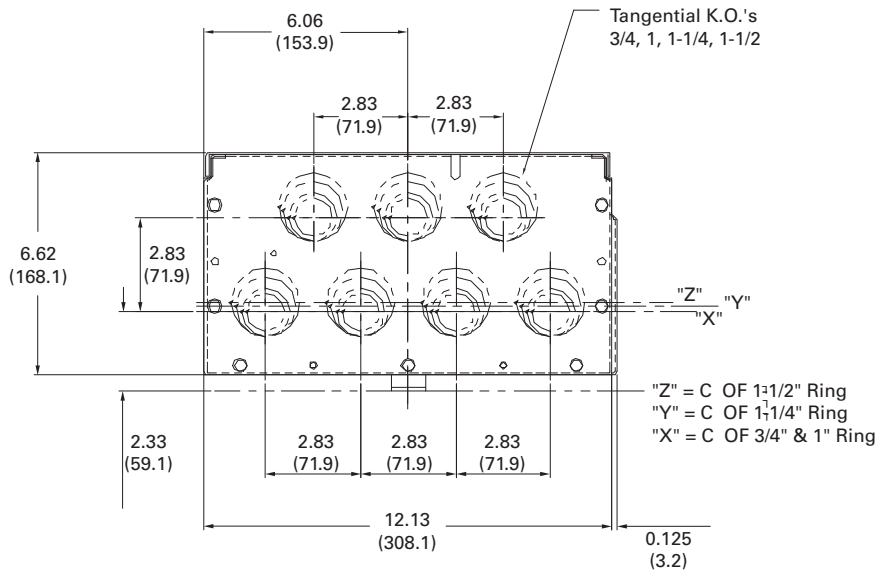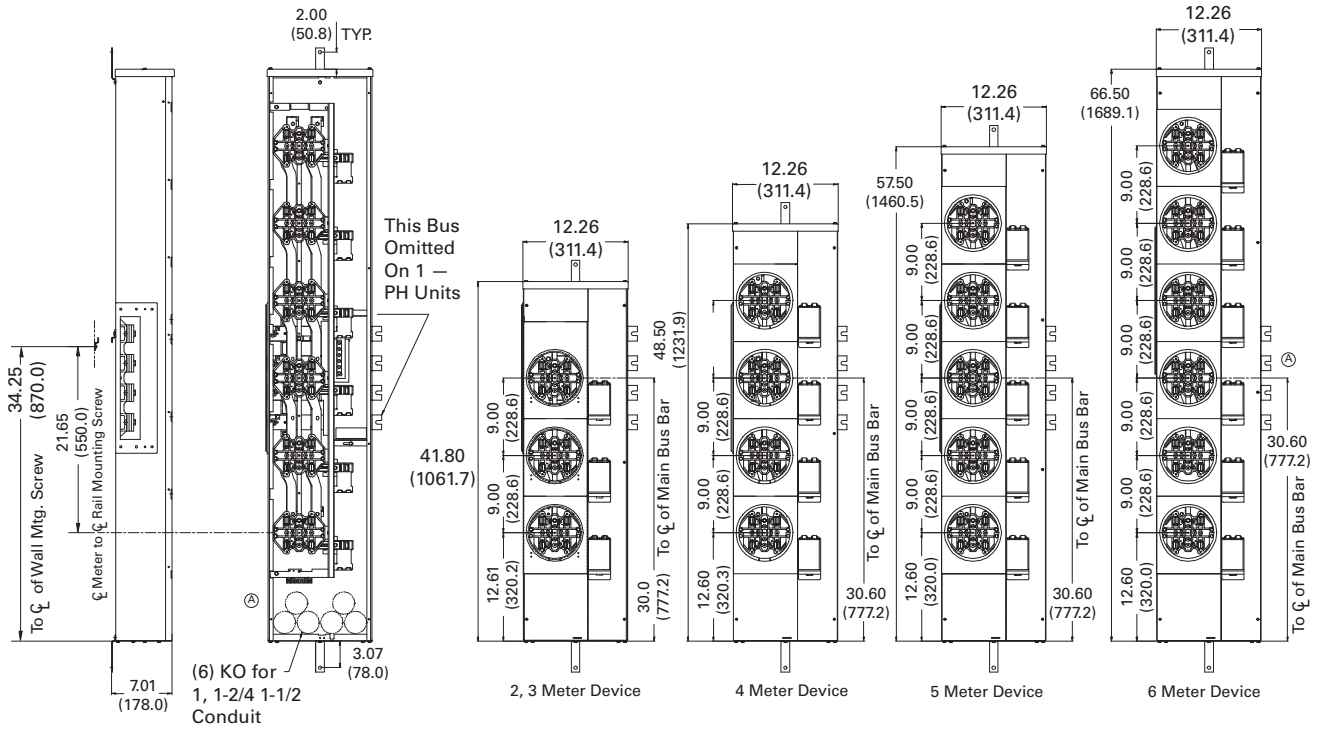



Top End & Bottom End View for NEMA 1;
Bottom End View for NEMA 3R

Note: Dimensions Apply to 800 and 1200 Ampere Horizontal Bus.

Approximate Dimensions in Inches (mm)

Modular Metering Stacks—Aluminum and Copper

1MM, 3MM, 200 Amperes

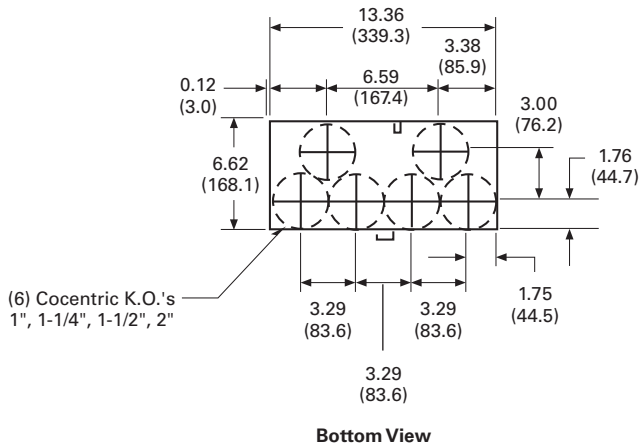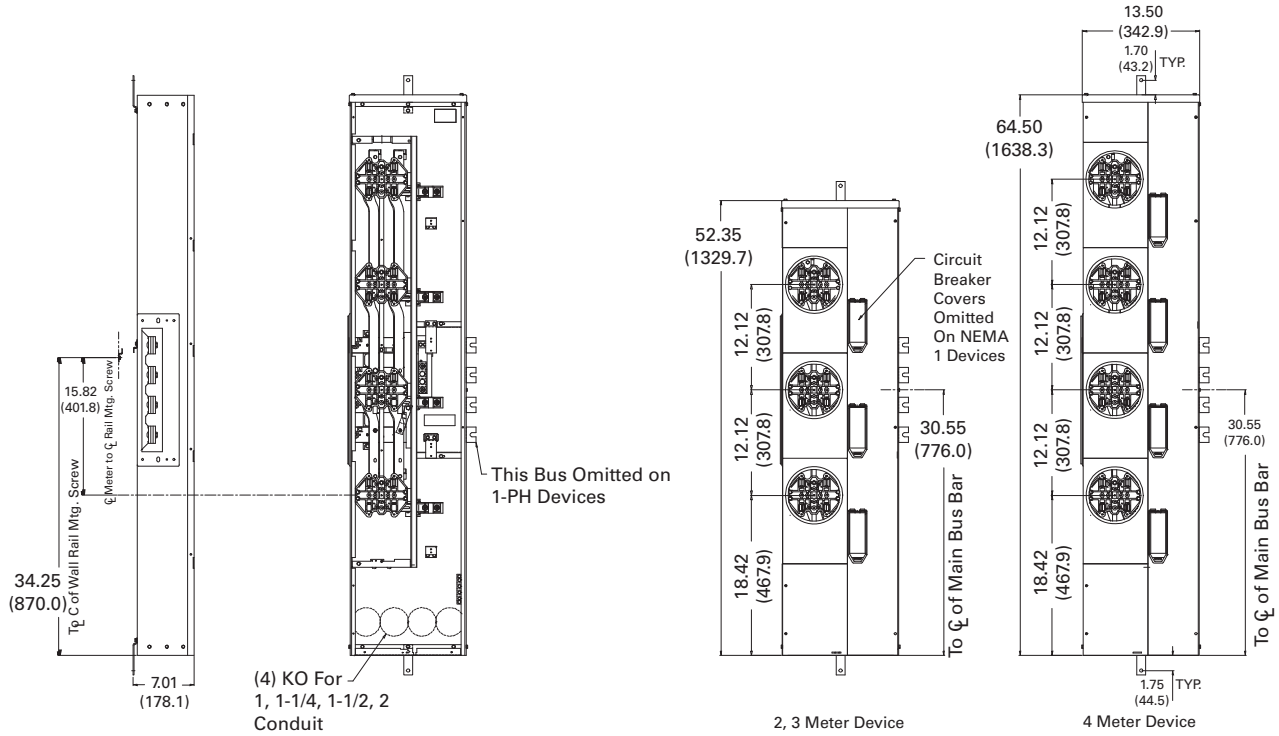

Note: Dimensions Apply to 800 and 1200 Ampere Horizontal Bus.


5.11 Metering Products

Group Metering

Approximate Dimensions in Inches (mm)

5-High, 200 Amperes, 1MM and 3MM Metering

5

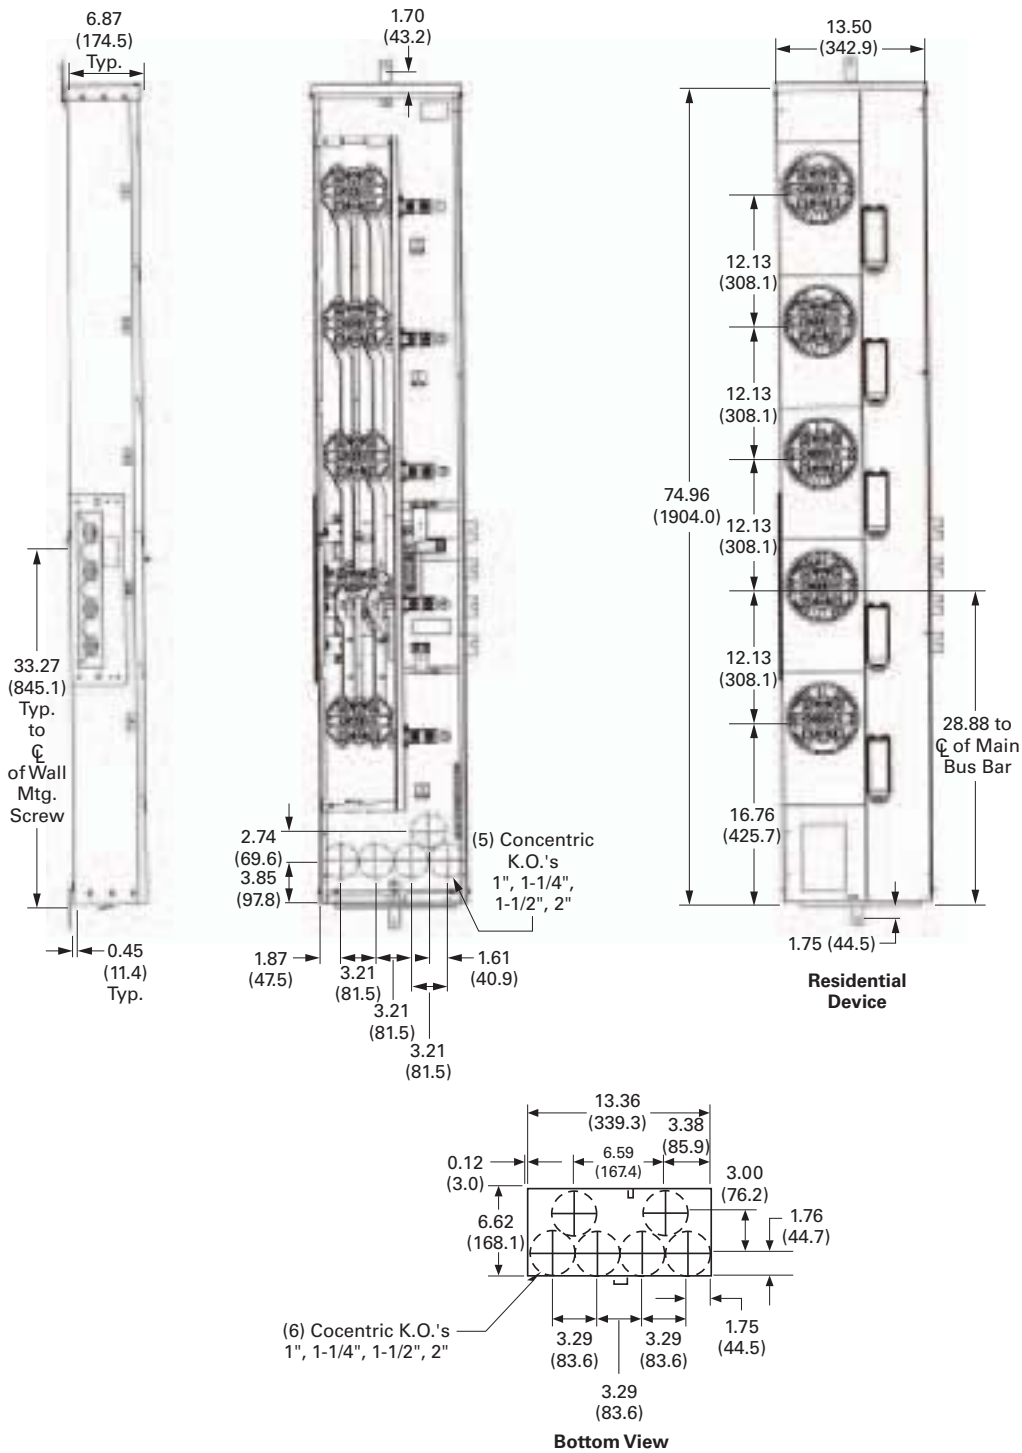

Note: The Bussed meter stack device shown on the far right of the figure, must be used on Mains with Busway connections, found on **Pages V1-T5-109 and V1-T5-113**. Please contact factory for catalog numbers associated with Bussed meter stack devices.

1MM and 3MM Metering Circuit Breakers



BR2100/CC2200

Contents

<i>Description</i>	<i>Page</i>
Systems for Residential and Commercial Applications	V1-T5-92
Meter Packs	V1-T5-94
Type CCV 120/240V Tenant Main Circuit Breaker	V1-T5-99
Meter Packs—1MP, 1MM and 3MM Main Tenant Circuit Breakers	V1-T5-100
Main Service Modules	V1-T5-101
Surge Metering	V1-T5-115
Residential Meter Stacks	V1-T5-116
1MP, 1MM and 3MM Main Tenant Circuit Breakers	V1-T5-126
Phase Balanced Stack	V1-T5-127
Commercial Meter Stack Modules	V1-T5-127
35MM, 37MM, 35SS and 37SS Main Tenant Circuit Breakers	V1-T5-134

1MP, 1MM and 3MM Main Tenant Circuit Breakers

Product Description

Specific main tenant circuit breakers that are to be used in meter packs (1MP), residential meter stacks (1MM) and three-phase in single-phase out meter stacks (3MM).

Features, Benefits and Functions

1MP, 1MM and 3MM Main Tenant Circuit Breakers

- The following Eaton breakers are to be used on 1MP, 1MM and 3MM modular metering stacks
- Series rating information available on **Pages V1-T5-142 through V1-T5-145**
- 120/240 Vac—field installed
- Three-phase, 400–1200A main circuit breakers
- Three-phase, 400–800A main fusible switches
- Simple bridge joint connection







Product Selection

Aluminum Bus—Main Lugs Not Included—See Page V1-T5-98

Description	Number of Poles	Main Tenant Circuit Breaker Ampere Rating	10 kAIC Catalog Number	22 kAIC Catalog Number	25 kAIC Catalog Number	42 kAIC Catalog Number	100 kAIC Catalog Number
Plug-on type circuit breakers used with 1MP, 1MM and 3MM 125A modular metering stacks	2	60	BR260	BRH260	—	BRHH260	—
	2	70	BR270	BRH270	—	BRHH270	—
	2	80	BR280	BRH280	—	BRHH280	—
	2	90	BR290	BRH290	—	BRHH290	—
	2	100	BR2100	BRH2100	—	BRHH2100	—
	2	110	BR2110	BRH2110	—	BRHH2110	—
	2	125	BR2125	BRH2125	—	BRHH2125	—
Bolt-on type circuit breakers used with 1MP, 1MM and 3MM 200A modular metering stacks	2	60	—	—	CHH2060H2X	CHH2060H4X	CHH2060X
	2	70	—	—	CHH2070H2X	CHH2070H4X	CHH2070X
	2	80	—	—	CHH2080H2X	CHH2080H4X	CHH2080X
	2	90	—	—	CHH2090H2X	CHH2090H4X	CHH2090X
	2	100	CCV2100X	—	CHH2100H2X	CHH2100H4X	CHH2100X
	2	125	CCV2125X	—	CHH2125H2X	CHH2125H4X	CHH2125X
	2	150	CCV2150X	—	CHH2150H2X	CHH2150H4X	CHH2150X
	2	175	CCV2175X	—	CHH2175H2X	CHH2175H4X	CHH2175X
	2	200	CCV2200X	—	CHH2200H2X	CHH2200H4X	CHH2200X

Accessories

1MP, 1MM and 3MM Modular Metering Stacks

	Description	Application	Catalog Number
Fifth Jaw Kit 	Fifth jaw kit	Bolted onto neutral in the 3, 6 or 9 o'clock position. Typically used on network metering systems (three-phase in/single-phase out) or when specified by utility company.	1MM5JK
	Isolated fifth jaw kit	Connects to the neutral with an insulated wire.	1MM5JKOP
Manual Bypass Kit 	Manual bypass kit (ring style socket only)	For use with 125A sockets only. (Not top socket.)	1MMBPM125
		For use with 200A sockets only. (Not top socket.)	1MMBPM200
		This kit only to be used for top position of two- and three-high 125A 1MM and 3MM stacks and of 2, 5 and six-position 125A 1MP packs.	1MMBPM125T
		This kit only to be used for top position of 200A two-position 1MP packs.	1MMBPM200T
Horn Bypass Kit 	Horn bypass	Used only on ringless cover stacks, kits can be installed on 125A or 200A sockets.	1MMBPH
		Note: For 1MP2122RRL use:	WCG8HB ^①
Lexan Blank Cover 	Lexan blank cover	Circular cover mounted on ring or ringless devices preventing access to meter socket while meter is not in place. Includes four plastic tabs that plug into each jaw.	1MMPCP
		Same as 1MMPCP minus the tabs located in the back to plug into jaws. This device to be used while meter bypass jumpers are in place (1MMBPJ).	1MMACP
	Blank meter socket cover	Used for 125A stacks. Fits bottom socket only. Kit replaces existing meter cover preventing access to meter socket. Includes hasp for seal.	1MMBC125B
		Used on 200A stacks. Fits bottom socket only. Kit replaces existing meter cover preventing access to meter socket. Includes hasp for seal.	1MMBC200B
Wall Mounting Rail 	Wall mounting rail	Rails are 4 feet (1.2m) in length. Bolted on wall for stacks, packs and mains to be hung.	1MMWB
Bussed Spacer 	Bussed spacer	Bussed spacer 1200A 4-inch (101.6 mm). Required when stacks are mounted on right-hand side in EUSERC areas. (copper)	3MMBSK ^②
	Bus duct riser/meter center connection	Available in 400, 600, 800A main fusible units only. Contact product line for details.	—

Notes

- ① WCG8HB only applies to meter packs built prior to 1998. Current meter packs use **1MMBPH**.
- ② Must be used when mounting MCB main next to an MTB main or another MCB main device.

Accessories for 1MP, 1MM and 3MM Modular Metering Stacks, continued

Indoor Corner Elbow



Description	Application	Catalog Number	
Indoor corner elbow (copper)	12-inch (304.8 mm) indoor corner elbow, 1200A, three-phase, four-wire for use with 1MM and 3MM only. Do not use with 35MM, 37MM, 35SS or 37SS stacks. 12-inch corner elbow not EUSERC approved.	3MMEB12	
Indoor corner elbow (copper)	16-inch (406.4 mm) indoor corner elbow, 1200A, three-phase, four-wire for use with 1MM, 3MM, 35MM, 37MM, 35SS and 37SS.	3MMEB16	
Barrier	Barrier for individual sockets	1MMBK	
Meter jumper and cover	Combination meter jumper and cover (200A maximum). Used to jumper line and load jaws as well as cover meter socket preventing exposure to current carrying parts.	1MMJCK	
Lug block	125A two-pole lug block assembly.	BRSF125	
Standard Sealing Ring	Sealing ring	Standard (included with packs and stacks) ①	
		Stainless steel screw type	1MMSR1
		Stainless steel snap type	1MMSR4
		Aluminum screw type with locking provisions	1MMSR5
Top endwall	125A, NEMA 1 top end wall with knockouts for 1MM, 3MM meter stacks	MM12N1WLK	
	200A, NEMA 1 top end wall for 1MM, 3MM meter stacks	MM20N1WLK	

Standard Sealing Ring



Note

① Aluminum Snap Type.

Renewal Parts

1MP, 1MM and 3MM Replacement Parts






	Description	Application	Catalog Number	
Ringless Cover 	Ringless cover (can install this to go from ring to ringless)	Installed on 125A socket for ringless security	1MMRC125	
		Installed on 200A socket for ringless security	1MMRC200	
		For use with top position of 125A, two- and three-position, 1MM and 3MM stacks and two-, five- and six-position 1MP packs	1MMRC125T	
		Top-position two position IMP	1MMRC200T	
Ring Cover 	Ring cover	Installed on 125A socket for ring security	1MMCP1	
		Installed on 200A socket for ring security	1MMCP2	
		Top socket ring cover 125A	1MMCP1T	
		Top socket ring cover 200A	1MMCP2T	
Tenant Breaker Cover 	Tenant breaker hinged cover	125A cover	1MMBC1	
		200A cover	1MMBC2	
Meter Socket 	Meter socket ^①	125 and 200A	1MMMS	
		Bus bar end cap	Flat—left side	47-24139A
			Bump—right side	47-28172-2A
		Main circuit breaker cover kit (black)		49-7060

Notes

^① Meter Packs **1MP2122RRL** and **1MP2122RRLB** use different meter sockets. See Renewal Parts listing RP.32A.01A.T.E for details.

See **RP00501001E** for a complete Renewal Parts listing.

Accessories for 35MM and 37MM Modular Metering Stacks

Description	Application	Catalog Number	
Wall mounting rail	Rails are 4 feet (1.2m) in length. Bolted on wall for stacks, packs and mains to be hung.	1MMWB	
Indoor corner elbow (copper)	16-inch (406.4 mm) indoor corner elbow, 1200A, three-phase, four-wire for use with 1MM, 3MM, 35MM, 37MM, 35SS and 37SS.	3MMEB16	
Handle insulator	Each meter block includes a lever bypass. This kit includes the sleeve which slides onto the lever handle.	37MMHC	
Barrel Lock Bracket Kit 	Barrel lock bracket kit	Needed when using barrel lock security.	37MMBLK
Totalizing Jumper Kit 	Totalizing jumper kit	Used if one socket is to meter two tenant feeds. When ordering jumper kit, should also order a plastic cover plate (1MMPCP + IMMJCK) preventing access to live parts on unused socket.	37MMTJK
EHD Breaker Mounting Kit 	EHD breaker mounting kit	Bolt-on breaker provisions are set up to accept CC/CHH breaker styles. If an EHD breaker is needed, each breaker requires one mounting kit.	37MMCBK
Blank Cover Kit 	Blank cover kit	Kit replaces meter cover preventing access to socket.	37MMCK ① 37MMCKA ②
	Barrier	Barrier for individual sockets	37MMBK
Three-Phase to Single-Phase Conversion Kit 	Three-Phase to single-phase conversion kit	This kit will convert one three-phase meter socket (37MM devices) to a single-phase socket. Only needed if phasing A-C or C-B. If single-phase socket is to be phased A-B, kit is not required for field conversion. (Must use three-phase breaker.)	37MM1CK
Bus duct riser/ meter center connection	Available in 400, 600, 800A Main fusible units and 400, 600, 800, 1000, 1200 main circuit breaker. Contact product line for details.	—	
Anti-inversion clip	This clip should be inserted into upper right hand jaw of a 320A meter socket. The purpose is prevent a 200A meter from being inserted into a 320A meter socket.	37MMINVCLIP	

Notes

- ① For all units made 10/2002 and earlier.
- ② For all units made after 11/2002.

Renewal Parts

35MM and 37MM Modular Metering Stacks

5

35MM Replacement Meter Socket



Description	Application	Catalog Number
35MM replacement meter socket	To replace meter socket with lever bypass and jaw release.	MSLMSA1
37MM replacement meter socket	To replace meter socket with lever bypass and jaw release.	MSLMSA2

37SS Replacement Meter Socket



35SS replacement meter socket	To replace meter socket with test bypass disconnect feature	MSTMSA1
37SS replacement meter socket	To replace meter socket with test bypass disconnect feature	MSTMSA2
Safety socket meter cover assembly	To replace ring type cover over the meter prior to 7/1/02.	MSTMCVR1
Safety socket meter cover assembly	To replace ring type cover over the meter after 7/1/02	MSTMCVR1E

Meter Cover Assembly



35MM and 37MM meter cover assembly	Prior to 12/1/02	37MMSK
	After 12/1/02	37MMSK1
Meter cover assembly with NJ latch	To replace ringless cover over the meter. Includes New Jersey latch requirement.	37MMSKNJ
Tenant breaker hinged cover	To replace cover over tenant breakers.	1MMBC2
Bus bar end cap	Flat—left side	47-24139A
	Bump—right side	47-28172-2A
Main circuit breaker cover/CIT (black)		49-7060

Note


See **RP.32A.01.T.E** for a complete Renewal Parts listing.

Dimensions

Approximate Dimensions in Inches (mm)

General Layout

Minimum and maximum height of single-phase and three-phase meter sockets above typical ground level.

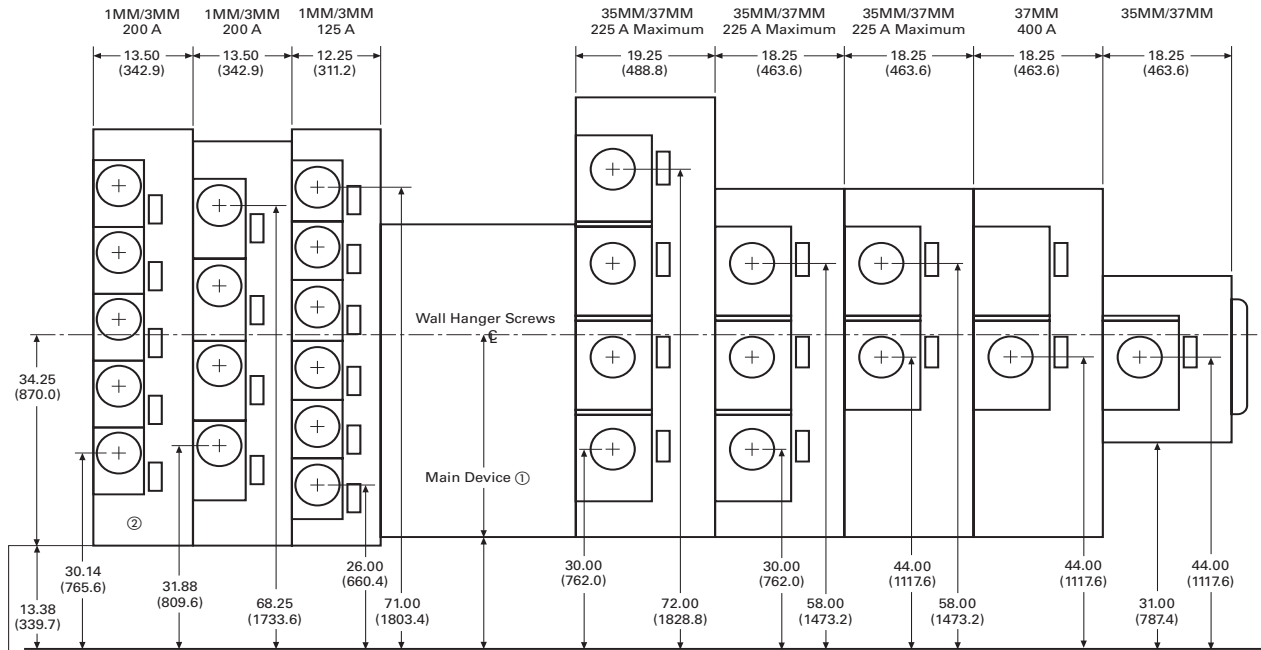

Typical Height Above Ground or Floor Level

Mounting Features



Mounting Features

A standard mounting rail and factory-installed swing away feet, speed up and simplify installation.

Notes

- ① Not a constant value. Dimension changes depending on main device chosen. See **Page V1-T5-110** for specific dimensions.
- ② Residential device.