




Product availability: Non-Stock - Not normally stocked in distribution facility

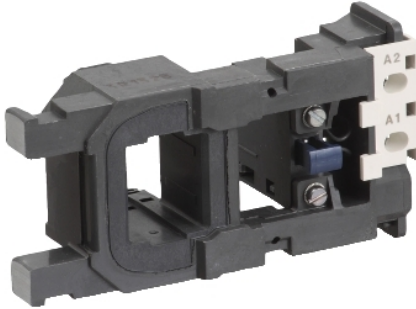

### Main

Range	TeSys
Product or component type	Contacteur coil
Device short name	LX4FF
Range compatibility	TeSys F LC1F contactor
Product compatibility	LC1F115 LC1F150
Control circuit type	DC low consumption
[Uc] control circuit voltage	220...230 V DC
Average resistance	84 Ohm inrush 68 °F (20 °C) 11100 Ohm holding 68 °F (20 °C)
Inductance of closed circuit	704 H
Operating time	30...40 ms closing 30...50 ms opening
Mechanical durability	10 Mcycles
Maximum operating rate	2400 cyc/h 131 °F (55 °C)

### Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	Operational 0.85...1.1 Uc 131 °F (55 °C) Drop-out 0.15...0.2 Uc 131 °F (55 °C)
Inrush power in W	560 W 68 °F (20 °C)
Hold-in power consumption in W	4.5 W 68 °F (20 °C)

### Environment

Ambient air temperature for operation	23...131 °F (-5...55 °C)
Net weight	0.95 lb(US) (0.43 kg)

### Ordering and shipping details

Category	22341 - CONTACTOR,D,K,&F ACCESS
Discount Schedule	I12
GTIN	03389110083521
Package weight(Lbs)	0.49 kg (1.07 lb(US))
Returnability	No
Country of origin	CZ

### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes

RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

### Contractual warranty

Warranty	18 months
----------	-----------