

Product End-of-Life Instructions


Lexium LXM32 / LXM52 Servo Drive

Product Range

Lexium LXM32 / LXM52 Servo Drive

Marketing Model

LXM32●●●●●●, LXM52●●●●●●

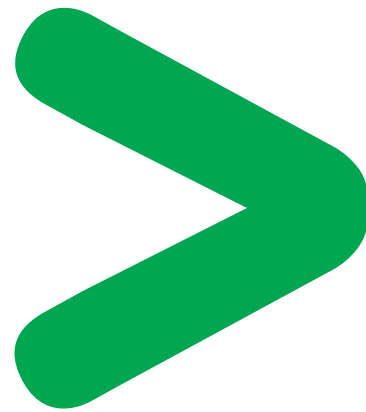

Size in mm (H x L x D):

274 x 225 x 108

Weight in g:

5552



Schneider
Electric


Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse ⇒ Separation for special treatment ⇒ Other Dismantling ⇒ Shredding

CAUTION: RISK OF ELECTRIC SHOCK DUE TO ELECTRICAL COMPONENTS CONTAINING ENERGY: ELECTROLYTIC CAPACITORS

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

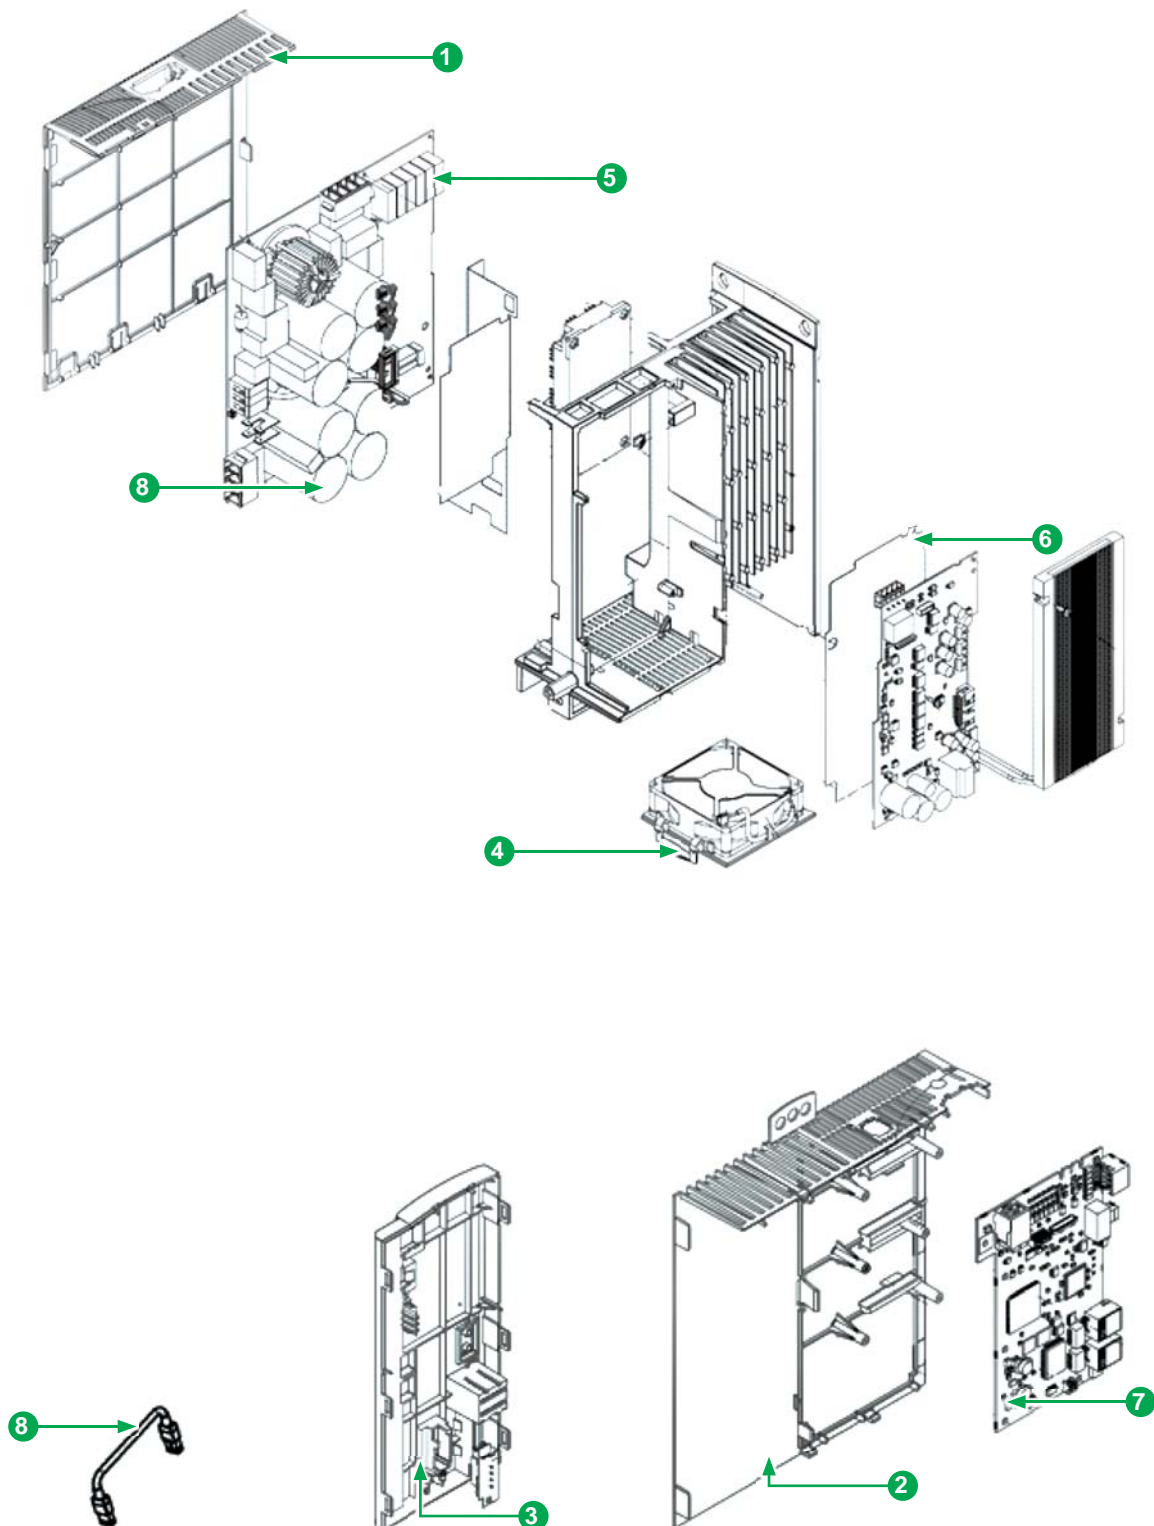

Recommendation	Number on drawing	Components	Weight (g)	Comment
Dismantling	1	Rightside housing	91.20	Polycarbonate
	2	Leftside housing	142.80	Polycarbonate
	3	Front face	99	Polycarbonate
	4	Fan support	14.70	Polycarbonate
Depollution	5	PCBA	1350	–
	6	PCBA	130	–
	7	PCBA	88	–
	8	Cable Serco Bridge	18.70	–
	9	Electrolytic capacitors (8)	80	–

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V3.

Publication : Schneider Electric