



## 125A/200A Meter Mounting Equipment, Type HQ, Commercial, Industrial ①②③④

### 5 Terminal for 1 Phase, 3 Wire {FMG Approved}

Cont. Amp Rating	Service	Connectors	Dimensions (inches)			Hub Opening	Enclosure Material	Catalog Number
			W	H	D			
125	OH	#6-350 MCM	10.0	17.0	5.2	1-1/4" Hub Inst.	Steel	40005-B2F
<i>Approved for Progress Energy, FP&amp;L and TECO</i>								
200	OH	#6-350 MCM	10.0	17.0	5.2	RX Opening	Steel	40005-01F
200	OH	#6-350 MCM	10.0	17.0	5.2	RX Opening	Aluminum	41005-01F
200	OH/UG	#6-350 MCM	13.0	19.0	5.1	RX Cl. Plate	Steel	40405-025F
200	OH/UG	#6-350 MCM	13.0	19.0	5.1	RX Cl. Plate	Aluminum	41405-025F

① All units are supplied with ground lugs.

② Bypass mechanism is lever-operated, jaw pressure release with 100% bypass capacity.


③ Disconnect sleeves should not be used with these devices.

④ These units are not for use with 3 phase, 4 wire service.  
Accessories: Page 26.



Commercial/Industrial  
200 Amp - 5 Jaw - Lever Bypass



40005-01F

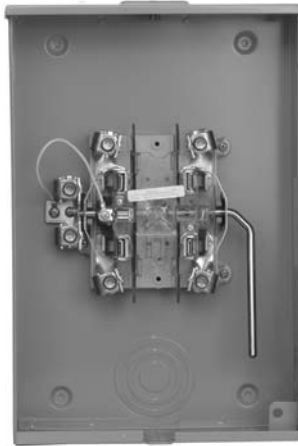

40405-025F

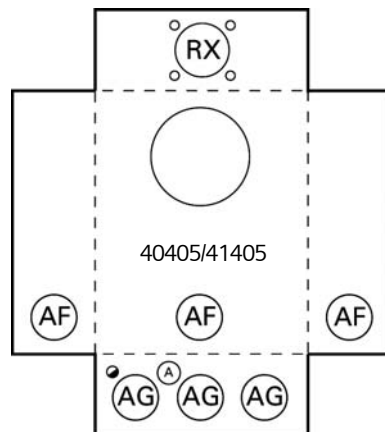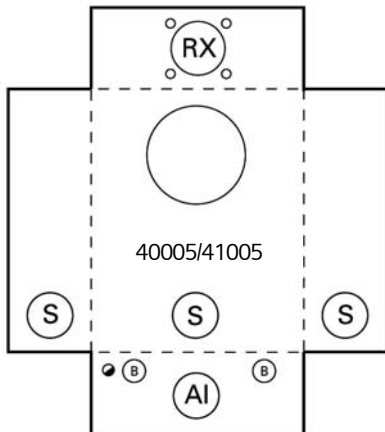

KNOCKOUTS (inches):	
○:	1/4
A:	1/2
B:	1/2, 3/4
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
AF:	1, 1-1/2, 2, 2-1/2, 3
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
AI:	1, 1-1/4, 1-1/2, 2, 2-1/2, 3
RX:	Ø2.750 HUB OP