

6 MOUNTING HOLES TOTAL  
(INCLUDES 3 TOP AND 3 BOTTOM)

NEMA TYPE 12/3R  
ILLUSTRATED

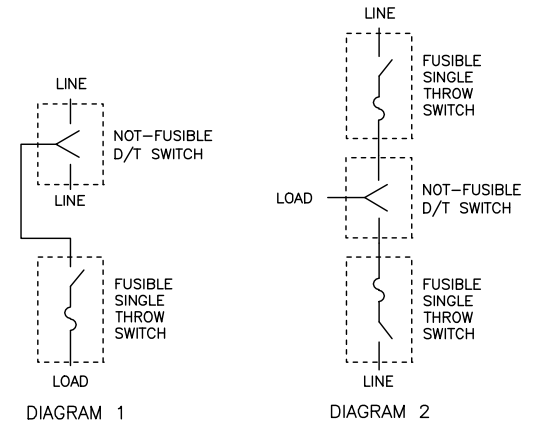
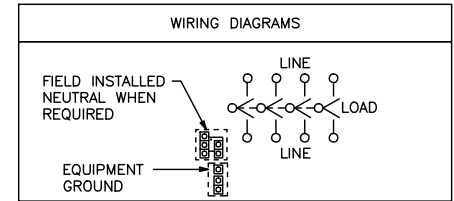


DIAGRAM 1 AND 2 ILLUSTRATE METHODS OF APPLYING FUSES TO DOUBLE THROW SWITCHES WHEN REQUIRED.

DUAL DIMENSIONS: INCHES  
MILLIMETERS

FIELD INSTALLABLE ACCESSORIES	
NEUTRAL KIT	DT400N
ELECTRICAL INTERLOCK	EK400DTU2
EQUIPMENT GROUND	(2) PK0GTA2

NOTES:  
FINISH - GRAY BAKED ENAMEL  
SHORT CIRCUIT CURRENT RATING:  
10,000 AMPERES WHEN PROTECTED BY CLASS H OR K FUSES.  
82,000 LINE DEVICES ARE LOAD-MAKE, LOAD-BREAK.  
cULus LISTED - FILE E-2875.  
SUITABLE FOR USE AS SERVICE EQUIPMENT IN US ONLY.  
▲USE LEFT AND RIGHT SWITCHING POLES FOR 250VDC APPLICATION.

CATALOG NUMBER	VOLTAGE RATINGS	TERMINAL LUGS		
		AMPERES	WIRE RANGE	TYPE
H82445	600VAC/250VDC▲	400	(1) 1/0-600 KCMIL OR (2) 1/0-300	AL/CU

DOUBLE THROW SAFETY SWITCHES  
400 AMPERE  
ENCLOSURE - NEMA TYPE 12/3R INDUSTRIAL



DWG# 3389  
NO.