



NEMA TYPE 12 INDUSTRIAL



- NOTES:  
 FINISH - GRAY BAKED ENAMEL  
 UL LISTED - E2875  
 ALL NEUTRALS - INSULATED GROUNDABLE  
 WHEN MOUNTING THESE SWITCHES, ALLOW 3.00 IN / 76 MM MIN. CLEARANCE BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.  
 ▲ USE BOTH OUTER SWITCHING POLES  
 ● IF CORNER GROUNDED DELTA, INSTALL NEUTRAL AND USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.

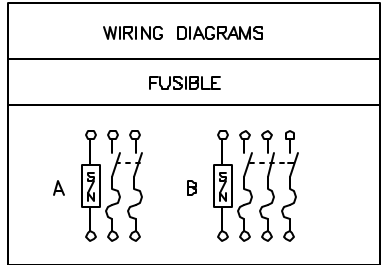

TERMINAL LUGS

AMPERES	MAX. WIRE	MIN. WIRE	TYPE
60	#3 AWG	#12 AWG	AL
60	#3 AWG	#14 AWG	CU

KNOCKOUTS

SYMBOL	CONDUIT SIZE		DIAMETER	
	IN	MM	IN	MM
A	.50	13	.88	22
B	.75	19	1.13	29
C	1.00	25	1.38	35
D	1.25	32	1.75	44

DUAL DIMENSIONS: INCHES MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	AMPERAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS					
				240VAC				250 VDC	
				STD.		MAX.		STD.	MAX.
				1PH	3PH	1PH	3PH	STD.	MAX.
H222AWK	240VAC:250VDC	60	A	3▲	7 1/2●	10▲	15●	10▲	-
H322AWK	240VAC:250VDC	60	B	3▲	7 1/2●	10▲	15●	10▲	-

HEAVY DUTY SAFETY SWITCHES  
 VISIBLE BLADE TYPE  
 60 AMPERE-SERIES F6  
 ENCLOSURE - NEMA TYPE 12, 3R

**SQUARE D COMPANY**

DWCF 3005  
 NO.