

DEP/DNP

Top Warm Air Outlet Convectors



DNP

Without built-in thermostat

DEP

With built-in programmable electronic thermostat

Features

Color

- Standard: white.

Finish

- Standard: epoxy/polyester powder paint.

Voltage

- 240/208V, 60 Hz, 1-phase.

Construction

- 21-gauge steel front cover.
- Top discharge provides powerful convection airflow.
- European design with clean front and curved sides.
- High-limit temperature control with automatic reset.

Heating element

- Finned element designed for durability and efficient heat transfer.

Watt density

- 740W/ft. (2428W/m).

Control

- DNP and DEP models: On/off switch.
- DEP model: Built-in programmable electronic thermostat.
- DEP model: 9 fixed 24-hour programs to choose from.
- DEP model: Keypad lock function that eliminates unwanted temperature adjustments and the use of the thermostat modes.
- DNP model: Requires a wall thermostat to operate (not included).

Global Commander highly recommends the use of an electronic wall thermostat for greater comfort with the DNP model.

Installation

- 2 in. (50 mm) minimum clearance to floor and 1 1/8 in. (30 mm) from an adjacent wall.
- Quick surface-mounted installation, with the included wall mounting bracket.

Warranty

- 2-year warranty against defects.
- Heating element has a 10-year warranty for the initial end user.



Application

- Kitchen, living room, family room, bedroom, basement.

Models

Product #		Volts	Watts	Weight	
Without built-in thermostat	With built-in programmable electronic thermostat			lb	kg
DNP0500	DEP0500	240/208	500/375	6.7	3.0
DNP1000	DEP1000	240/208	1000/750	8.7	4.0
DNP1500	DEP1500	240/208	1500/1125	10.7	4.9
DNP2000	DEP2000	240/208	2000/1500	12.8	5.8

Standard color is white.

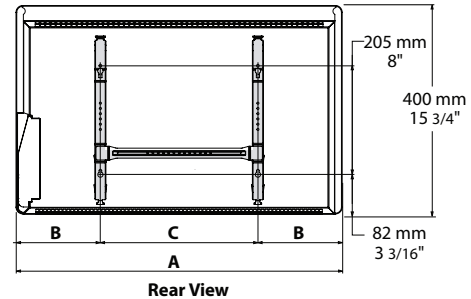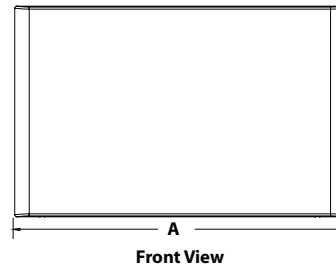

Watts	Dimension					
	A		B		C	
	in.	mm	in.	mm	in.	mm
500/375	16 3/4	425	4 3/8	113	7 7/8	200
1000/750	20 11/16	525	6 3/8	163	7 7/8	200
1500/1125	24 5/8	625	6 3/8	163	11 13/16	300
2000/1500	32 1/2	825	8 3/8	213	15 11/16	400

