


XG2 Series In-Line GFCI

Looking for the best GFCI in the industry? Look at the Ericson XG2 line of GFCIs for your job needs. Tough, fully sealed, NEMA 6P submersible GFCI body with all-weather pushbuttons makes this GFCI the right choice. Many options to order for your particular needs and environments. Customizable with many options to suit.

- Indoor/outdoor use: provides increased resistance to impact, heat, UV exposure, and is water tight
- New and improved TEST and RESET buttons are easier to operate and provide enhanced tactile feel and audible feedback
- Redesigned circuit conforms to the *NEW* UL 943 standard for safety governing GFCIs:
 - A more stringent voltage surge test ensures the GFCI can handle higher surge current
 - Corrosion test ensures greater immunity to damp, corrosive environments
 - Enhanced immunity to conducted radio frequency noise reduces nuisance trips.

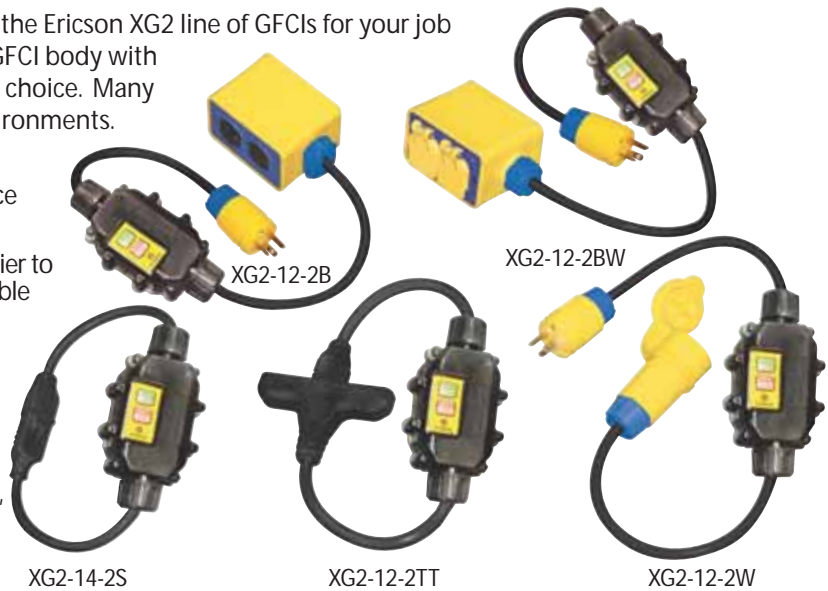

Meets NEC & OSHA construction site requirements

Compact & portable, this unit is easy to use, store & transport.

Automatic & manual power-up models are available.

Available with factory-wired & molded-on devices.

High intensity neon lamp glows bright when power is on for easy identification of power status.

Engineered strain relief protects cord from excessive bending & pulling.

NEMA TYPE 6P

polycarbonate enclosure is corrosion, impact, UV and water tight.

Test & Reset buttons clearly marked for easy identification & recessed to prevent accidental activation.

Oversized test & reset buttons are easier to operate and provide enhanced tactile feel & audible feedback.

A wide variety of outlets are available; from molded-on single connector & Tri-Tap™ to Perma-Tite® devices & Ericson outlet boxes.

Works on two-wire or three-wire circuits.

NEMA TYPE 4X & 6P Enclosure:

- Excels in demanding outdoor & in-plant environments
- Provides added protection against ground fault shock hazards in high-risk areas
- Resists hose-directed water

- Available in 15A & 20A models.
- **Up to 1.5 horse-power switch rating**

Model XG2-12-2BW shown



Assembled in the USA






NEMA TYPE 4X & 6P GFCI Enclosure

Custom configurations are available for your jobsite or OEM applications. Contact your nearest representative or the factory today!

YG2 Series Selection Guide

Cat. Number	POWER UP TYPE	LENGTH	PLUG	CONNECTOR	AMPS	WATTS
With Molded-On Plug & Connector						
XG2-14-2S	AUTO	2	MLD 5-15	MLD 5-15	15	1875
XG2-14-25S		25		MLD 5-15		
XG2-12-2TT		2		MLD 5-15 TRI		
XG2-12-50TT		50		MLD 5-15 TRI		
With Factory-Wired Perma-Grip™ Plug & Connector or Molded Plug						
XG2-12-2G	AUTO	2	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-2G-15	AUTO	2	MLD 5-15	5-15 1610-CG	15	1875
XG2-12-2G-MR-15	MANUAL	2	MLD 5-15	5-15 1610-CG	15	1875
XG2-12-2G-LKG	AUTO	2	5-20 2310-PG	5-20 2410-CG	20	2500
XG2-12-2G-MR-LKG	MANUAL	2	5-20 2310-PG	5-20 2410-CG	20	2500
XG2-12-2G-MR	MANUAL	2	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-10G	AUTO	10	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-10G-MR	MANUAL	10	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-25G	AUTO	25	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-25G-15	AUTO	25	MLD 5-15	5-15 1610-CG	15	1875
XG2-12-25G-MR-15	MANUAL	25	MLD 5-15	5-15 1610-CG	15	1875
XG2-12-25G-LKG	AUTO	25	5-20 2310-PG	5-20 2410-CG	20	2500
XG2-12-25G-MR-LKG	MANUAL	25	5-20 2310-PG	5-20 2410-CG	20	2500
XG2-12-25G-MR	MANUAL	25	5-20 1512-PG	5-20 1612-CG	20	2500
XG2-12-50G	AUTO	50	5-20 1512-PG	5-20 1612-CG	20	2500
With Factory-Wired Perma-Tite® Plug & Connector						
XG2-12-2W	AUTO	2	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-2W-15	AUTO	2	5-15 1510-PW6P	5-15 1610-CW6P	15	1875
XG2-12-2W-MR-15	MANUAL	2	5-15 1510-PW6P	5-15 1610-CW6P	15	1875
XG2-12-2W-LKG	AUTO	2	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-2W-MR-LKG	MANUAL	2	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-2W-MR	MANUAL	2	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-10W	AUTO	10	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-10W-MR	MANUAL	10	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-10W-MR-15	MANUAL	10	5-15 1510-PW6P	5-15 1610-CW6P	15	1875
XG2-12-10W-LKG	AUTO	10	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-10W-MR-LKG	MANUAL	10	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-25W	AUTO	25	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-25W-15	AUTO	25	5-15 1510-PW6P	5-15 1610-CW6P	15	1875
XG2-12-25W-MR-15	MANUAL	25	5-15 1510-PW6P	5-15 1610-CW6P	15	1875
XG2-12-25W-LKG	AUTO	25	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-25W-MR-LKG	MANUAL	25	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-25W-MR	MANUAL	25	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-50W	AUTO	50	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-50W-MR	MANUAL	50	5-20 1512-PW6P	5-20 1612-CW6P	20	2500
XG2-12-50W-LKG	AUTO	50	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500
XG2-12-50W-MR-LKG	MANUAL	50	L5-20 2310-PW6P	L5-20 2410-CW6P	20	2500

Foot Note: 1. All cord is SJT. 2. All product is rated 120 volts.



6P
SUBMERSIBLE

**All "W" Models
Have Perma-Tite®
Water Tight
Plugs & Connectors**