


**Product datasheet**  
Characteristics

**8903LXO60V02**  
LIGHTING CONTACTOR 600VAC 30AMP LX

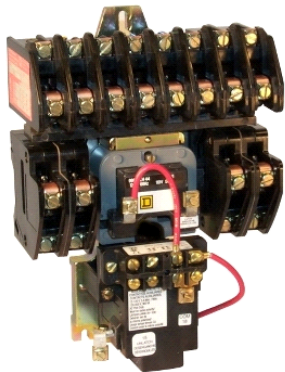

**Main**

Product or component type	Mechanically Held Lighting Contactor
Range of product	8903LX
Control circuit	Separate control circuit

**Complementary**

[Uc] control circuit voltage	110 V AC 50 Hz 120 V AC 60 Hz
[In] rated current	20 A tungsten 30 A fluorescent
Poles description	6P 6 NO
Control type	No control units
Local signalling	No indicator
Electrical connection	Screw-clamp terminals

**Environment**

NEMA degree of protection	Not rated (open device)
product certifications	CSA UL listed

**Offer Sustainability**

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1431 - Schneider Electric declaration of conformity
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.