



SUNNY BOY 3000-US / 3800-US / 4000-US

SB 3000US / SB 3800-US-10 / SB 4000US



ASSEMBLED IN THE USA



UL Certified

- For countries that require UL certification (UL 1741/IEEE 1547)
- Optional integrated AFCI functionality meets the requirements of NEC 2011 690.11

Efficient

- 96.8% peak efficiency
- OptiCool™ active temperature management system

Safe

- Galvanic isolation

Simple

- Patented automatic grid voltage detection*
- Integrated DC disconnect switch

SUNNY BOY 3000-US / 3800-US / 4000-US


UL certified, reliable system managers

The Sunny Boy 3000-US, 3800-US and 4000-US inverters are specially designed for countries that require UL certification. Automatic grid voltage detection* and an integrated DC disconnect switch simplifies installation, ensuring safety as well as saving time. These models feature galvanic isolation and can be used with all types of modules – crystalline as well as thin-film. The die-cast aluminum enclosure, with the OptiCool active temperature management system, guarantees the highest yields possible and a long service life, even under extreme conditions. The Sunny Boy 3800-US is designed for projects with a current limit of 16A.

* US Patent US7352549B1

Technical data	Sunny Boy 3000-US		Sunny Boy 3800-US	Sunny Boy 4000-US	
	208 V AC	240 V AC	240 V AC	208 V AC	240 V AC
Input (DC)					
Max. recommended PV power (@ module STC)	3750 W		4750 W	4375 W	5000 W
Max. DC power (@ $\cos \phi = 1$)	3200 W		4200 W	4200 W	
Max. DC voltage	500 V		600 V	600 V	
DC nominal voltage	250 V		310 V	310 V	
MPP voltage range	175 – 400 V	200 – 400 V	250 – 480 V	220 – 480 V	250 – 480 V
Min. DC voltage / start voltage	175 / 228 V	200 / 228 V	250 / 285 V	220 / 285 V	250 / 285 V
Max. input current / per string (at DC disconnect)	17 A / 17 A 36 A @ combined terminal		18 A / 18 A 36 A @ combined terminal	18 A / 18 A 36 A @ combined terminal	
Number of MPP trackers / fused strings per MPP tracker	1 / 4 (DC disconnect)				
Output (AC)					
AC nominal power	3000 W		3800 W	3500 W	4000 W
Max. AC apparent power	3000 VA		3800 VA	3500 VA	4000 VA
Nominal AC voltage / adjustable	208 V / ●	240 V / ●	240 V / –	208 V / ●	240 V / ●
AC voltage range	183 – 229 V	211 – 264 V	211 – 264 V	183 – 229 V	211 – 264 V
AC grid frequency; range	60 Hz; 59.3 – 60.5 Hz		60 Hz; 59.3 – 60.5 Hz	60 Hz; 59.3 – 60.5 Hz	
Max. output current	15 A	13 A	16 A	17 A	
Power factor ($\cos \phi$)	1				
Phase conductors / connection phases	1 / 2		1 / 2	1 / 2	
Harmonics	< 4%				
Efficiency					
Max. efficiency	96.0%	96.5%	96.8%	96.5%	96.8%
CEC efficiency	95.0%	95.5%	96.0%	95.5%	96.0%
Protection devices					
DC reverse-polarity protection	●		●	●	
Integrated AFCI*	○		○	○	
AC short circuit protection	●		●	●	
Galvanically isolated / all-pole sensitive monitoring unit	●/–		●/–	●/–	
Protection class / overvoltage category	I / III		I / III	I / III	
General data					
Dimensions (W / H / D) in mm (in)	450 / 350 / 235 (18 / 14 / 9)				
DC Disconnect dimensions (W / H / D) in mm (in)	187 / 297 / 190 (7 / 12 / 7.5)				
Packing dimensions (W / H / D) in mm (in)	390 / 580 / 470 (15 / 23 / 18.5)				
DC Disconnect packing dimensions (W / H / D) in mm (in)	370 / 240 / 280 (15 / 9 / 11)				
Weight / DC Disconnect weight	38 kg (84 lb) / 3.5 kg (8 lb)				
Packing weight / DC Disconnect packing weight	44 kg (97 lb) / 4 kg (9 lb)				
Operating temperature range (full power)*	–25 °C ... +45 °C (–13 °F ... +113 °F)				
Noise emission (typical)	40 dB(A)		37 dB(A)		37 dB(A)
Internal consumption at night	0.1 W		0.1 W	0.1 W	
Topology	LF transformer		LF transformer	LF transformer	
Cooling concept	OptiCool		OptiCool	OptiCool	
Electronics protection rating / connection area	NEMA 3R / NEMA 3R		NEMA 3R / NEMA 3R	NEMA 3R / NEMA 3R	
Features					
Display: text line / graphic	●/–		●/–	●/–	
Interfaces: RS485 / Bluetooth®	○/○		○/○	○/○	
Warranty: 10 / 15 / 20 years	●/○/○		●/○/○	●/○/○	
Certificates and permits (more available on request)	UL1741 (Second Ed.), UL1998, UL1699B, IEEE 1547, FCC Part 15 (Class A & B), CSA C22.2 No. 1071-2001				
*For AFCI functionality or extended operating temperature range to –40 °C specify SBXXXXUS-12 when ordering.					
● Standard features ○ Optional features – Not available Data at nominal conditions NOTE: US inverters ship with gray lids.					
Type designation	SB 3000US		SB 3800-US-10	SB 4000US	

SUNNYBOY3384DUS122329 Sunny Boy, OptiCool, and SMA are registered trademarks of SMA Solar Technology AG. Text and figures comply with the state of the art applicable when printing. Subject to technical changes. We accept no liability for typographical and other errors. Printed on chlorine-free paper.

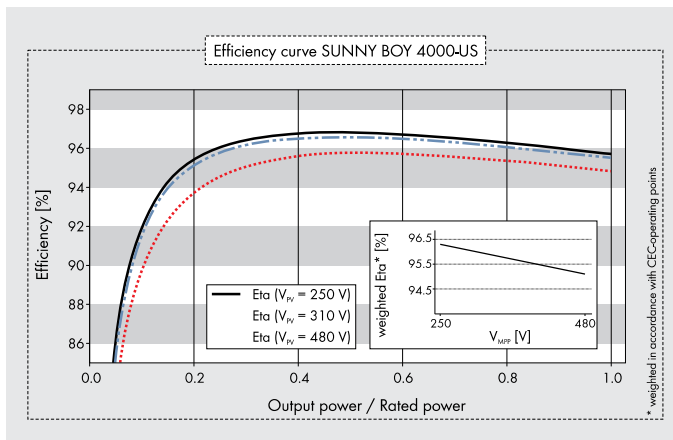

Accessories



RS485 interface
485USPB-NR



Bluetooth Piggy-Back
BTPBINV-NR
with External Antenna
BTPB-EXTANT-NR



Combi-Switch
DC disconnect and PV
array combiner box
COMBO-SWITCH



Combiner Box
Simplify wiring for added
convenience and safety
SBCB-6-3R or SBCB-6-4