

MULTIPLES OF RATED CURRENT


POWERPACT® Q-FRAME
MOLDED CASE CIRCUIT BREAKERS
CHARACTERISTIC TRIP CURVE NO. 734-6

CIRCUIT BREAKER INFORMATION

Circuit Breaker Prefix	Continuous Ampere Rating	Maximum AC Voltage	Number of Poles
QB, QD, QG, QJ	90	240	2
QB, QD, QG		240	3
QJ		208Y/120	3

This curve is to be used for application and coordination purposes only. The **EZ-AMP** overlay feature at the bottom of the page should be used during coordination studies.

All time/current characteristic curve data is based on 40°C ambient cold start. Terminations are made with conductors of appropriate length and ratings.

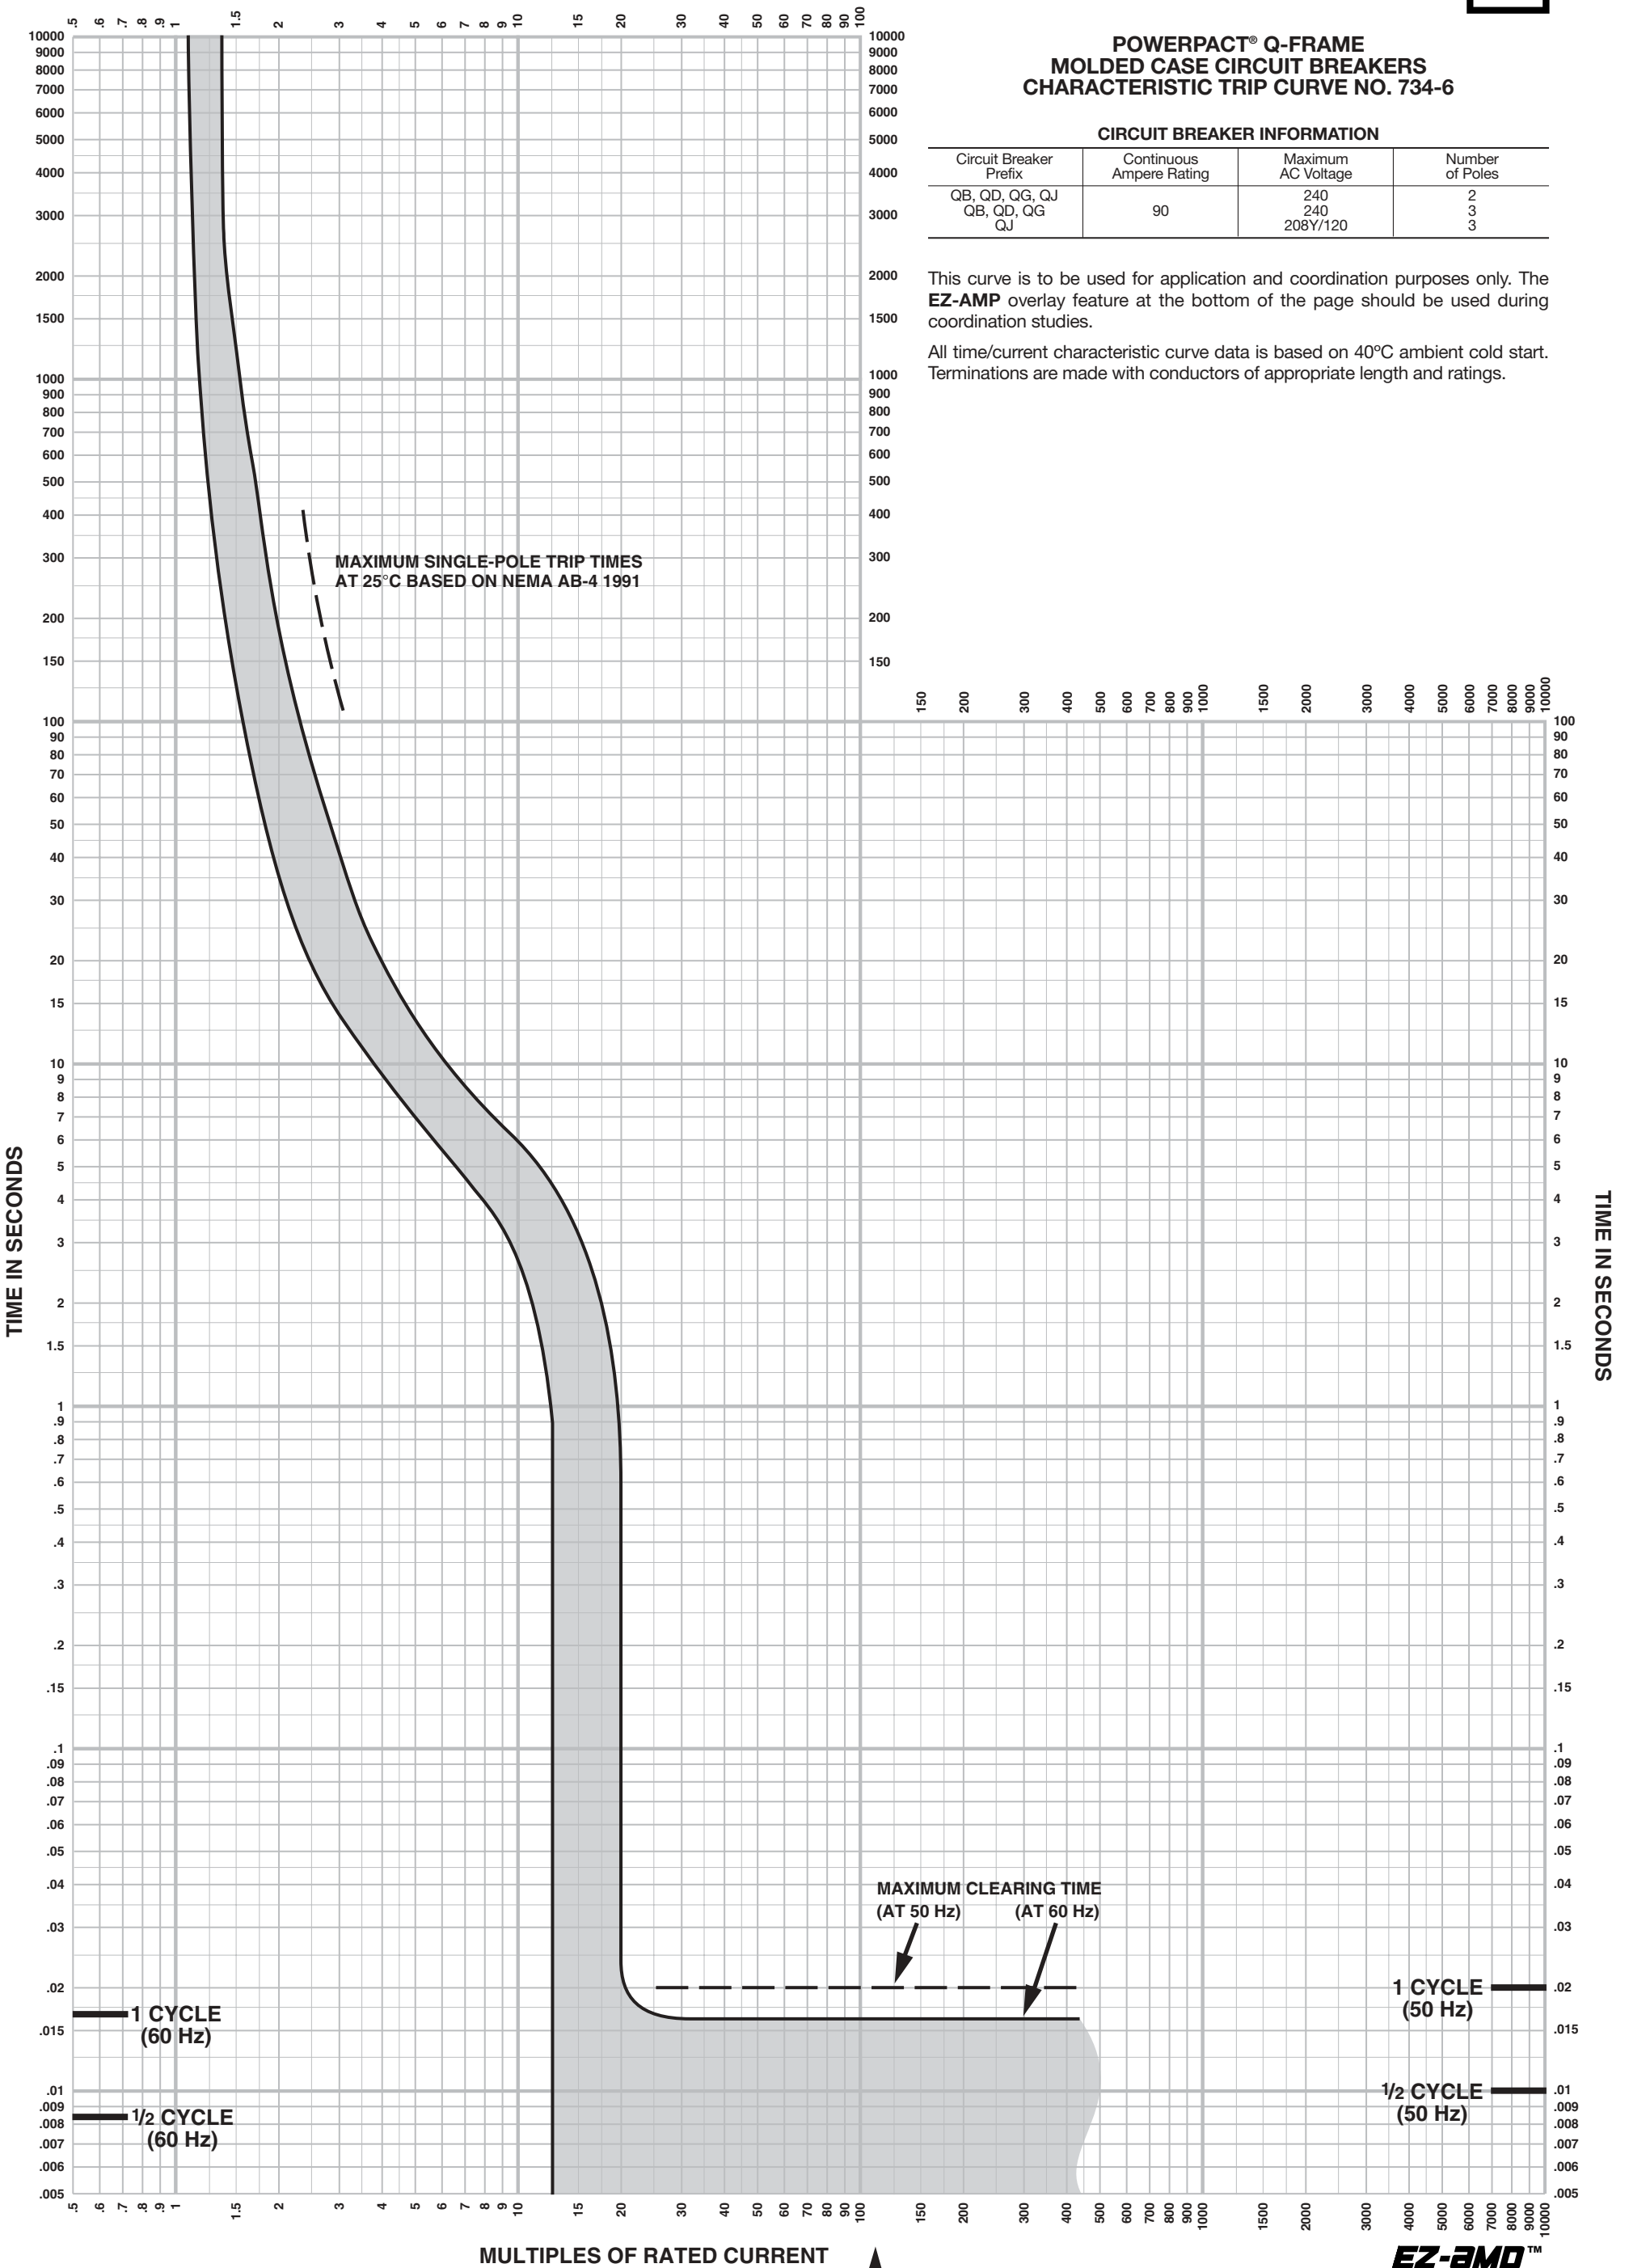

MAXIMUM SINGLE-POLE TRIP TIMES
AT 25°C BASED ON NEMA AB-4 1991

MAXIMUM CLEARING TIME
(AT 50 Hz) (AT 60 Hz)

1 CYCLE
(60 Hz)

1/2 CYCLE
(60 Hz)

1 CYCLE
(50 Hz)

1/2 CYCLE
(50 Hz)

MULTIPLES OF RATED CURRENT

90

EZ-AMP™