


**Product datasheet**  
Characteristics

**9999D01**

auxillary contact DPA, 1 NC, 50-90 A contactor, 5A at 120VAC

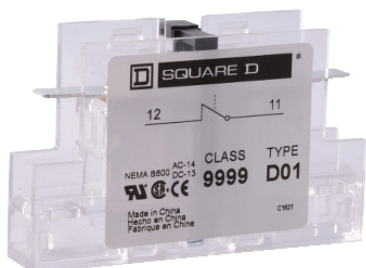

**Main**

Range of product	DPA
Product or component type	Auxiliary Contact Module
Product destination	Contactor

**Complementary**

Auxiliary contact composition	1 NC
Rated breaking capacity	3 A at 120 V AC for inductive control circuit per UL 508 1.5 A at 240 V AC for inductive control circuit per UL 508 0.75 A at 480 V AC for inductive control circuit per UL 508 0.6 A at 600 V AC for inductive control circuit per UL 508 5 A at <= 600 V AC for resistive control circuit per UL 508

**Environment**

product certifications	CE CSA UL recognized
------------------------	----------------------------

**Offer Sustainability**

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1545 - Schneider Electric declaration of conformity

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.