


# Product Environmental Profile

**9013FSG2J21 Water Pump Pressure Switch**

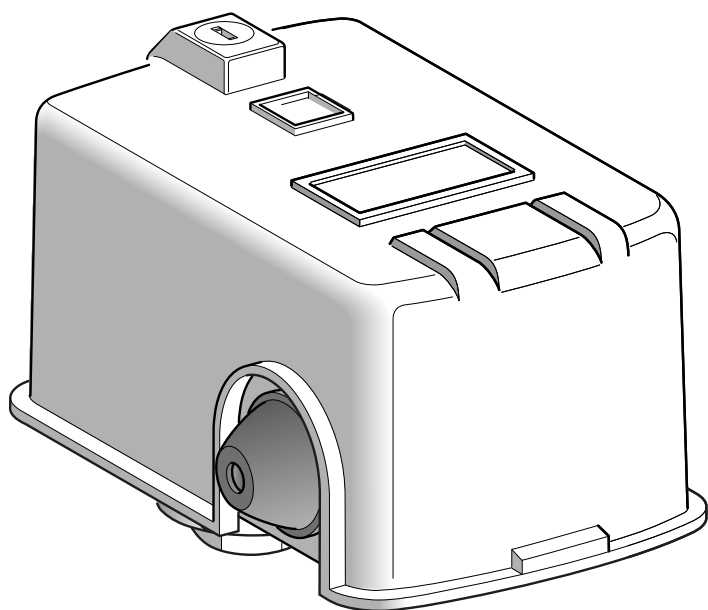

**Telemecanique**

**Sensors**

# Product Environmental Profile - PEP

## Product overview

The main purpose of 9013FSG2J21 and more generally of any water pump pressure switch is to control the pressure of water and air, up to 25 bars.

This range consists of metallic pressure switches with various pressure actuator connections and thermoplastic covers. Two to four contact pairs change state in response to changes in pressure applied through actuators.

The representative product used for the analysis is 9013FSG2J21.

The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.


The environmental analysis was performed in conformity with ISO 14040.

For more information please contact us at: [global-green-sensors@schneider-electric.com](mailto:global-green-sensors@schneider-electric.com)

## Constituent materials

The mass of the product range is from 350 g and 420 g including packaging. It is 390 g for FSG2J21.

The constituent materials are distributed as follows:

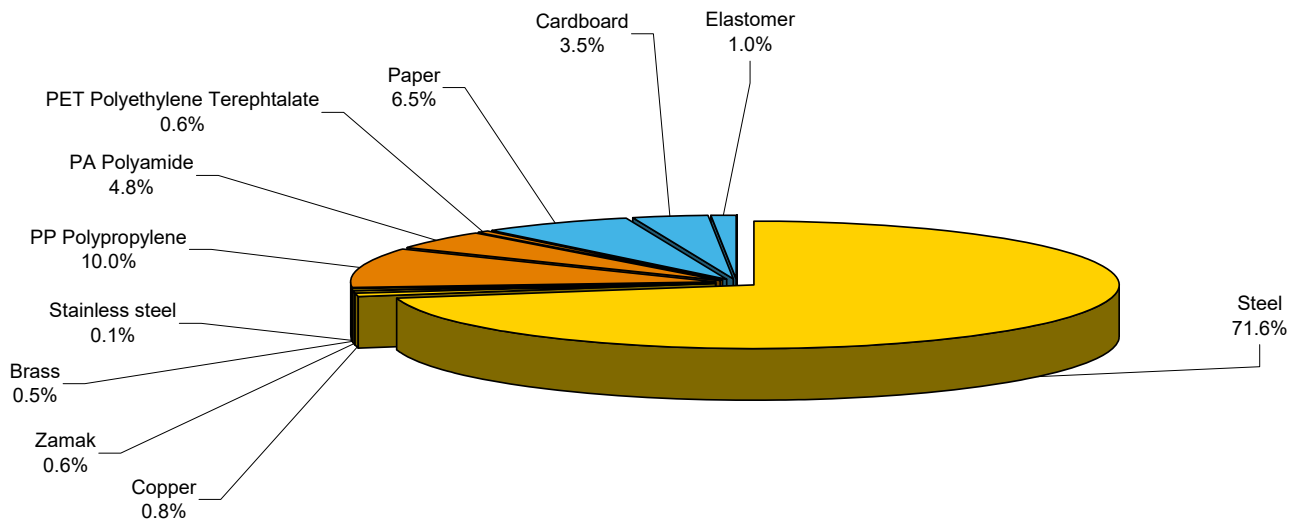

## Substance assessment

The representative product of this range 9013FSG2J21 is designed in conformity with the requirements of the RoHS directive (European Directive 2002/95/EC of 27 January 2003) and does not contain, or only contains in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive.

## Manufacturing

9013FSG2J21 product is manufactured at a Schneider Electric production site on which an ISO14001 certified environmental management system has been established.

## Distribution

The weight and volume of the packaging have been optimized, based on the European Union's packaging directive.

9013FSG2J21 packaging weight is 39 g. It consists of cardboard and paper.

# Product Environmental Profile - PEP

## Use

The water pump pressure switches do not generate environmental pollution (noise, emissions) requiring special precautionary measures in standard use and do not need special maintenance operation.

## End of life

At end of life, the water pump pressure switches have been optimized to decrease the amount of waste and allow recovery of the product components and materials.

This product range contains a cover that should be separated from the stream of waste so as to optimize end-of-life treatment by special treatments. The location of this component is given in the End of Life Instruction document which is available for this product range.

The recyclability potential of the products has been evaluated using the "ECO DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

According to this method, the potential recyclability ratio is: 70%.

As described in the recyclability calculation method this ratio includes only metals and plastics which have proven industrial recycling processes.

## Environmental impacts

Life cycle assessment has been performed on the following life cycle phases: Materials and Manufacturing (M), Distribution (D), Installation (I) Use (U), and End of life (E).

Modeling hypothesis and method:

- the calculation was performed on 9013FSG2J21

- product packaging: is included

- installation components: no special components included.

- scenario for the Use phase: this product range is included in the category 3: (assumed service life is 20 years and no energy consumption in use scenario).

End of life impacts are based on a worst case transport distance to the recycling plant (1,000km) and the here-after mentioned environmental impacts are valid for a product sold in the North-American area.

### Presentation of the product environmental impacts

Environmental indicators	Unit	For 9013FSG2J21					
		S = M + D + I + U + E	M	D	I	U	E
Raw Material Depletion	Y-1	2.34E-14	2.34E-14	1.75E-18	0.00E+00	0.00E+00	7.92E-19
Energy Depletion	MJ	2.41E+01	2.22E+01	1.28E+00	0.00E+00	0.00E+00	5.80E-01
Water depletion	dm <sup>3</sup>	1.29E+01	1.27E+01	1.22E-01	0.00E+00	0.00E+00	5.51E-02
Global Warming	g≈CO <sub>2</sub>	1.59E+03	1.45E+03	1.02E+02	0.00E+00	0.00E+00	4.60E+01
Ozone Depletion	g≈CFC-11	2.76E-04	1.72E-04	7.19E-05	0.00E+00	0.00E+00	3.25E-05
Air Toxicity	m <sup>3</sup>	3.13E+05	2.85E+05	1.92E+04	0.00E+00	0.00E+00	8.66E+03
Photochemical Ozone Creation	g≈C <sub>2</sub> H <sub>4</sub>	5.26E-01	4.00E-01	8.69E-02	0.00E+00	0.00E+00	3.93E-02
Air acidification	g≈H <sup>+</sup>	1.96E-01	1.77E-01	1.30E-02	0.00E+00	0.00E+00	5.86E-03
Water Toxicity	dm <sup>3</sup>	3.33E+02	3.14E+02	1.27E+01	0.00E+00	0.00E+00	5.75E+00
Water Eutrophication	g≈PO <sub>4</sub>	1.62E-01	1.60E-01	1.69E-03	0.00E+00	0.00E+00	7.64E-04
Hazardous waste production	kg	1.33E-02	1.33E-02	3.78E-05	0.00E+00	0.00E+00	1.71E-05

Life cycle assessment has been performed with the EIME software (Environmental Impact and Management Explorer), version 4.1, and with its database version 11.

The manufacturing phase is the life cycle phase which has the greatest impact on the environmental indicators.

## System approach

As almost all products of the range and particularly 9013FSG2J21 are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

