


MULTIPLES OF TRIP CURRENT RATING

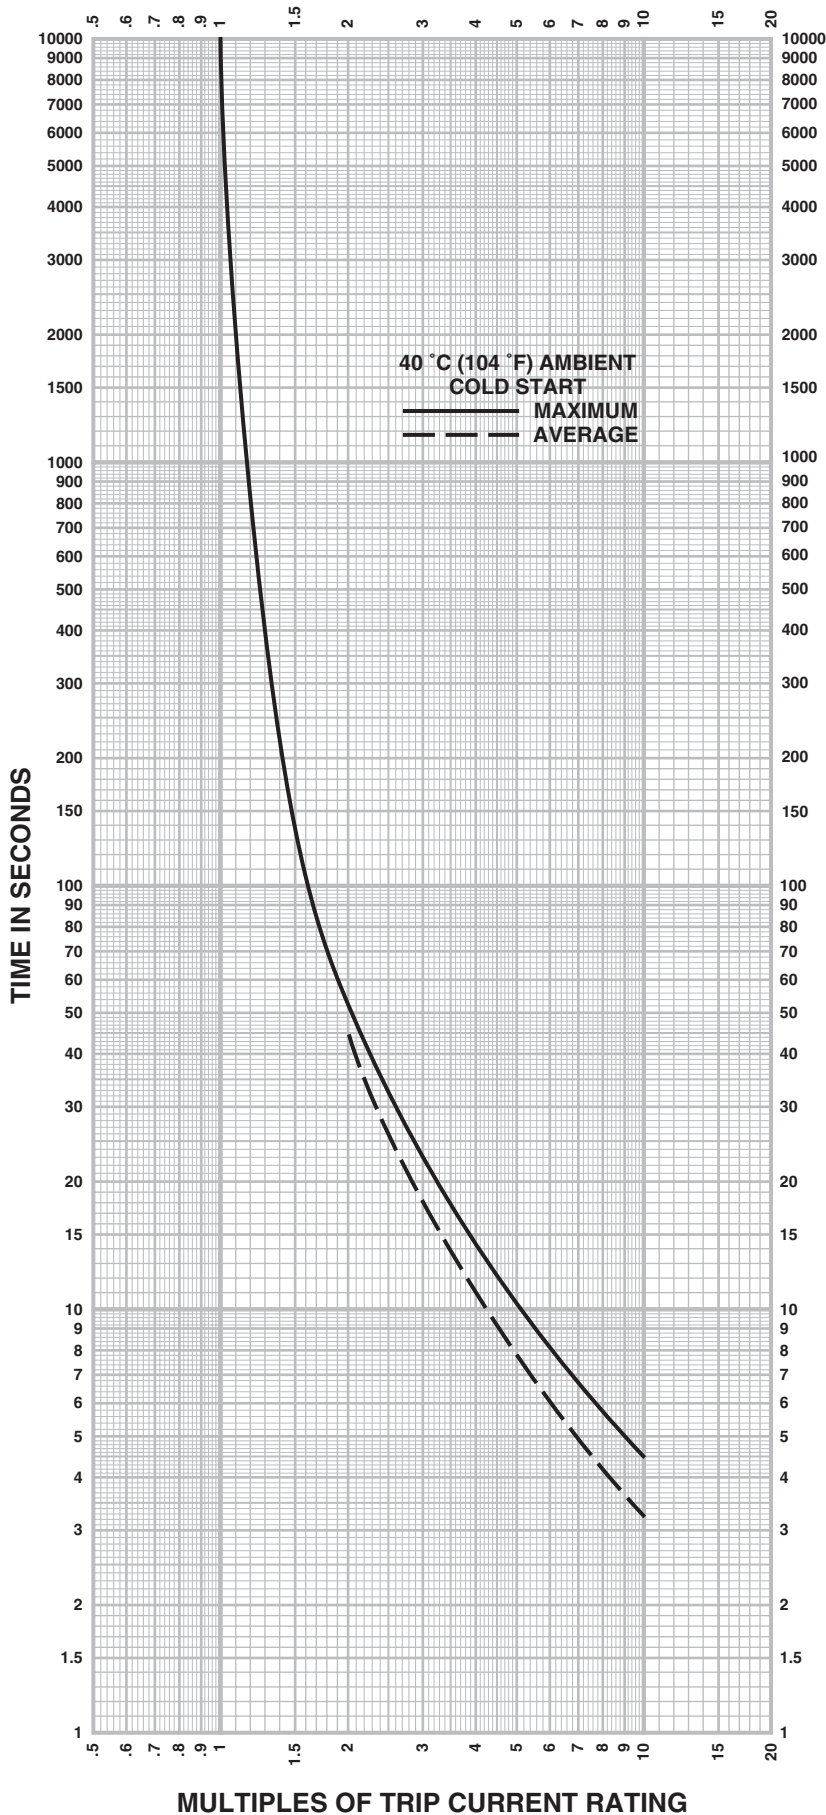

OVERLOAD RELAY TIME-CURRENT CHARACTERISTICS REFERENCE DRAWING NO. 30068-453

| | |
|--------------------|---------------|
| Relay Design | Melting Alloy |
| Thermal Unit Types | FB3.33–FB35 |

40 °C ambient cold start trip time characteristics of:

| | |
|-----------------------|---------------------|
| Equipment | AC Magnetic Starter |
| Size | 0 & 1 |
| Type | SB & SC |
| Series | A |
| Qty. of Thermal Units | 1, 2, or 3 |

When installed in:

- Hinged door and all other (larger) enclosures

The trip current rating can be determined from the instructions given with the appropriate thermal unit selection table. The characteristics shown do not necessarily apply to equipment manufactured before the date of the referenced drawing.