


Features

- ▶ Push-wire connection technology
- ▶ Up to 12 AWG (solid or stranded) for power input wiring
- ▶ 2 conductors per pole on power input side
- ▶ Colour coding and/or marking
- ▶ Male/female are mechanically keyed
- ▶ Compact and sleek design
- ▶ UL 94 V-O flammability rating

Benefits

- ▶ Connector is ready to be wired by the contractor
- ▶ Allows convenient power daisy chain to other devices
- ▶ Reduces the potential for wiring errors
- ▶ Ensures connectors are not mis-mated
- ▶ Allows for feeding connector through conduit knockouts
- ▶ Provides the utmost in flame-retardant

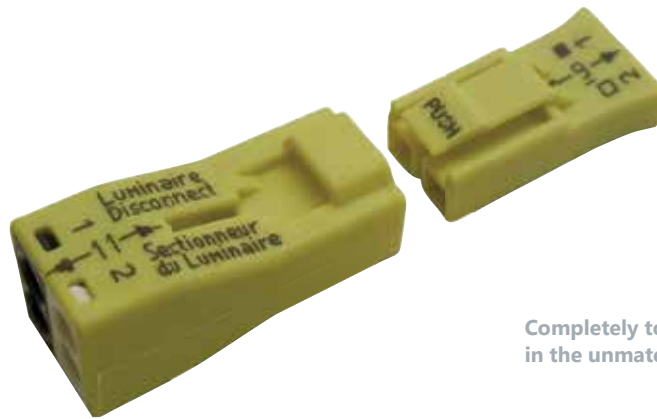

Completely touch-proof
in the unmated position

Order code	Description	Electrical specs	Rated Temperature	Case qty
58869	Luminaire Disconnect	600 V - 60 A	105°C	500



E313353



1961671 (LR18677)

Luminaire Disconnect