

INSULATE
SEAL
PROTECT

HEAVY WALL CROSS-LINKED POLYOLEFIN TUBING

Heavy wall heat shrink tubing provides maximum reliability for insulating and protecting cable joints and terminations

FEATURES AND BENEFITS

- 3:1 shrink ratio
- Withstands severe mechanical requirements of U.R.D., submersible and direct burial installations
- High impact, abrasion, corrosion and chemical resistance
- Rated for 1 kV, 90°C continuous use
- Optional thermoplastic adhesive liner provides complete environmental protection and insulation
- Continuous operating temperature: -55°C to 110°C
- Shrink temperature: 120°C

STANDARDS

- Meets UL 486D, CSA C22.2 No. 198.2
- ANSI C119- 1; Western Underground Guide Numbers 2.4 and 2.5; ICEA and NEMA insulation thickness requirements
- DNV Type approval

TYPICAL APPLICATIONS


- Electrical/Utility
- Industrial
- Strain relief and mechanical protection
- Insulation of primary low voltage cables



DIMENSIONS

ORDER NUMBER	EXPANDED		RECOVERED				APPLICATION RANGE FOR GENERAL USE		600/ 1000 V SINGLE CONDUCTOR SIZE	LENGTHS	
	INTERNAL DIAMETER (MIN) D		INTERNAL DIAMETER (MAX) d		WALL THICKNESS (NOM) W						
	MM	IN	MM	IN	MM	IN	MM	IN	AWG/MCM	M	IN
0350	8.9	0.35	3.0	0.12	1.8	0.07	3.5 - 8	.15 - .3	#14 - #10	1.2	48
0500	13.0	0.51	4.1	0.16	2.0	0.08	4.5 - 11	.2 - .45	#8 - #6	1.2	48
0750	19.1	0.75	6.1	0.24	3.0	0.12	6.5 - 16.5	.25 - .65	#6 - #2	1.2	48
1100	27.9	1.10	8.9	0.35	3.0	0.12	10 - 24	.4 - .95	#1 - 3/0	1.2	48
1500	38.1	1.50	11.9	0.47	3.6	0.14	13 - 35	.5 - 1.4	2/0 - 350	1.2	48
2000	50.8	2.00	16.0	0.63	3.6	0.14	17.5 - 44	.7 - 1.75	250 - 500	1.2	48
2700	68.1	2.70	22.1	0.87	3.8	0.15	24 - 59	.95 - 2.3	600 - 1000	1.2	48
3500*	89.9	3.54	30.0	1.18	3.8	0.15	33 - 80	1.3 - 3.1	800 - 1250	1.2	48
4700*	119.9	4.72	39.9	1.57	3.8	0.15	44 - 104	1.75 - 4.1	1500 - 2500	1.2	48
5100*	129.5	5.10	39.9	1.57	3.8	0.15	43 - 109	1.7 - 4.3		1.2	48
6000*	152.4	6.00	50.8	2.00	3.8	0.15	56 - 130	2.2 - 5.1		1.2	48
6700*	170.2	6.70	56.6	2.23	3.8	0.15	61 - 145	2.4 - 5.7		1.2	48

*CFW sizes 3500 to 6700 are not UL or CSA listed

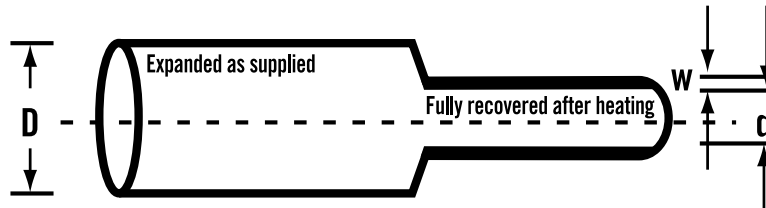

ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resulting wall thickness will be less than specified.
- Select Options:
 - Colour: Black (BK) or Red (RD)
 - Printing: Printed or Unprinted
 - Adhesive Lining: Lined (D) or Unlined (U)
 - Lengths: 6, 9, 12, 24 or 48 inches
- Please specify the product name, order number and options you require
- Order Example: CFW, 1500, black, unprinted, unlined, 48 in lengths

Please contact your Customer Service Representative for information on custom colours, sizes, lengths and material data sheet.

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.