


Utility/Current Transformer Metering

800 Amp/50K AIC/Bussed Current Transformer Enclosure

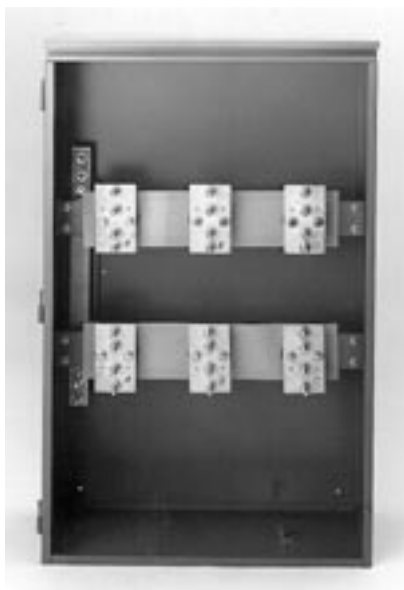

803 HEE

APPLICATION

- For remote metering when main service is 201-800 amps
- For use with utility supplied bar type current transformers that meet ANSI C12.11

CONSTRUCTION

- Type 3R construction
- Removable hinged door with sealing provision
- Cover has newly designed fixed handles (not shown)

STANDARDS

- UL 414 listed, complies with ANSI C12.7

FINISH


- ANSI 61 gray acrylic electrocoat finish

Overhead/Underground-Surface Mount

CATALOG NUMBER	AIC RATING	AMPACITY MAX.	AMPACITY CONT.	VOLTAGE	SERVICE TYPE	CONDUCTOR LUG RANGE		DIMENSIONS (INCHES)		
						PHASE CONDUCTOR LINE/LOAD	NEUTRAL CONDUCTOR	HEIGHT (H)	WIDTH (W)	DEPTH (D)
803 HEE	50K	800	800	600	3Ø 4W	STUDS	STUDS	48	30	12

Utility/Current Transformer Metering

400-800 Amp/10K & 50K AIC/Bussed Current Transformer Mounting Base



6019A



6019HA

APPLICATION

- For use with CT rated metering enclosures
- For use with bar type CT that meet ANSI C12.11
- 1/2" studs on 1 3/4" centers - line & load

STANDARDS


- UL 414 listed, complies with ANSI C12.7

FINISH

- ANSI 61 gray acrylic electrocoat finish (mounting plate only)

Overhead/Underground-Surface Mount

CATALOG NUMBER	AIC RATING	# OF C.T. PROVISIONS	AMPACITY CONT.	VOLTAGE MAX.	SERVICE TYPE	CONDUCTOR LUG RANGE		NEUTRAL CONDUCTOR	MIN. SIZE ENCLOSURE
						PHASE CONDUCTOR LINE	LOAD		
6019A	10K	2	400	600	1Ø or 3Ø 3W	STUDS	STUDS	STUDS	24"
6019HA	50K	2	400	600	1Ø or 3Ø 3W	STUDS	STUDS	STUDS	24"
6019E	10K	2	800	600	1Ø or 3Ø 3W	STUDS	STUDS	STUDS	24"
6019HE	50K	2	800	600	1Ø or 3Ø 3W	STUDS	STUDS	STUDS	24"
6067A	10K	3	400	600	3Ø 3W or 4W	STUDS	STUDS	STUDS	30"
6067HA	50K	3	400	600	3Ø 3W or 4W	STUDS	STUDS	STUDS	30"
6067EE	10K	3	800	600	3Ø 3W or 4W	STUDS	STUDS	STUDS	30"
6067HEE	50K	3	800	600	3Ø 3W or 4W	STUDS	STUDS	STUDS	30"

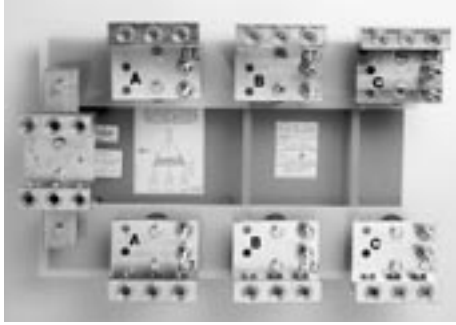

6067 HEEL

APPLICATION

- For use with CT rated metering enclosures
- For use with bar type CT that meet ANSI C12.11
- Integral mechanical lugs - line & load

STANDARDS


- UL 414 listed, complies with ANSI C12.7

FINISH

- ANSI 61 gray acrylic electrocoat finish (mounting plate only)

Overhead/Underground-Surface Mount

CATALOG NUMBER	AIC RATING	# OF C.T. PROVISIONS	AMPACITY MAX.	CONT.	VOLTAGE	SERVICE TYPE	CONDUCTOR LUG RANGE	
							LINE	LUG WIRE RANGE LINE & LOAD
6019 HAL	50K	2	400	400	600	1Ø or 3Ø/3W		(1) 4 AWG - 600kcmil or (2) 1/0 - 250kcmil
6019 HEL	50K	2	800	800	600	1Ø or 3Ø/3W		(3) 4 AWG - 600kcmil or (6) 1/0 - 250kcmil
6067 HAL	50K	3	400	400	600	3Ø 4W		(1) 4 AWG - 600kcmil or (2) 1/0 - 250kcmil
6067 HEEL	50K	3	800	800	600	3Ø 4W		(3) 4 AWG - 600kcmil or (6) 1/0 - 250kcmil

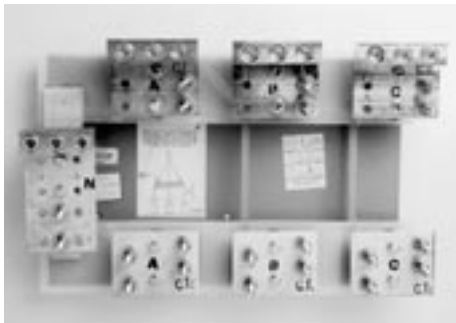

6067 HEELS

APPLICATION

- For use with CT rated metering enclosures
- For use with bar type CT that meet ANSI C12.11
- Studs line side - lugs load side
- 1/2" studs on 1 3/4" centers

STANDARDS

- UL 414 listed, complies with ANSI C12.7

FINISH

- ANSI 61 gray acrylic electrocoat finish (mounting plate only)

Overhead/Underground-Surface Mount

CATALOG NUMBER	AIC RATING	# OF C.T. PROVISIONS	AMPACITY MAX.	CONT.	VOLTAGE	SERVICE TYPE	CONDUCTOR LUG RANGE	
							LINE	LUG WIRE RANGE LOAD
6019 HALS	50K	2	400	400	600	1Ø or 3Ø/3W	STUDS	(1) 4 AWG - 600kcmil or (2) 1/0 - 250kcmil
6019 HELS	50K	2	800	800	600	1Ø or 3Ø/3W	STUDS	(3) 4 AWG - 600kcmil or (6) 1/0 - 250kcmil
6067 HALS	50K	3	400	400	600	3Ø 4W	STUDS	(1) 4 AWG - 600kcmil or (2) 1/0 - 250kcmil
6067 HEELS	50K	3	800	800	600	3Ø 4W	STUDS	(3) 4 AWG - 600kcmil or (6) 1/0 - 250kcmil