

Electronic Line Voltage 'SMART' Thermostat

NEW

Single Pole ETS610W/A1, ETS610W/A2

(W - White / A - Almond)

- Controls one line thermostatically.
- Provides positive off regardless of ambient temperature.

Double Pole ETD620W/A1, ETD620W/A2

(W - White / A - Almond)

- Controls one line thermostatically / breaks two lines mechanically in OFF position.
- Provides positive off regardless of ambient temperature.

"Smart" Program Control

- Adapts to any installation of both convection and fan forced heaters.
- Technology learns and remembers characteristics of your room's heat loss, and responds to provide optimum comfort.

Features

- Attractive styling suits all décors.
- Electronic sensing for accurate temperature control.
- Neutral white and almond finishes.
- Large, easy-to-read and use control dial.
- Includes Celsius and Fahrenheit temperature control dial inserts.
- Lead wires are enclosed into switch for safety – no exposed electrical contacts.
- Manual off switch/electrical disconnect on double pole – pull dial ON and push OFF.

Technical Specifications

- Temperature range 5° to 30° C, 40° to 85° F.
- Rated up to 277 VAC.
- Inductive ratings up to 1/6 HP @ 120 volts, 1/3 HP @ 240 volts.
- Cycle-to-cycle accuracy of 0.1° C / 0.2° F.

Electrical Rating

Models ending with "1":
1.25A - 7.4A, 300-1750W @ 240VAC

Models ending with "2":
5A - 16A, 1200-3840W @ 240VAC



Designed to meet new
CSA 828 Efficiency
Performance Standard

Specifications subject to change without notice.

ELECTROMICIDE®


The Difference Is Built In

Dimplex North America Limited • 1367 Industrial Road, Cambridge, Ontario, Canada, N1R 7G8 • www.dimplex.com



INCLUDES FAHRENHEIT AND
CELSIUS DIAL INSERTS

Electronic thermostat provides even,
efficient heat for perfect comfort.

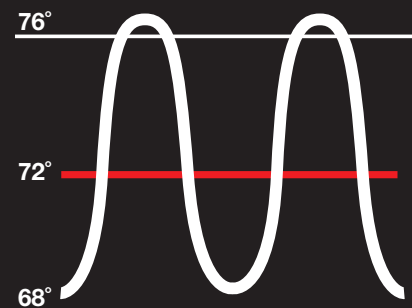

- Electronic Wall Thermostat
- Mechanical Wall Thermostat