


M800S

TYPE 1 300 to 800A SURFACE MOUNT MOULDED CASE CIRCUIT BREAKER ENCLOSURE

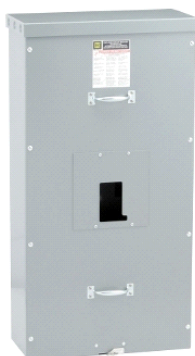

Main

| | |
|----------------------|--|
| Circuit breaker type | MGL MJL PGL PJL PKL PLL |
|----------------------|--|

Complementary

| | |
|--------------------|-------------|
| Enclosure material | Steel |
| Width | 533.4 mm |
| Height | 1025.52 mm |
| Depth | 247.65 mm |
| [In] rated current | 300...800 A |
| Device mounting | Surface |
| Poles description | 2P 3P |

Environment

| | |
|---------------------------|-----------|
| NEMA degree of protection | NEMA 1 |
| product certifications | CSA UL |

Offer Sustainability

| | |
|----------------------------------|---|
| Sustainable offer status | Green Premium product |
| RoHS (date code: YYWW) | Compliant - since 1434 - Schneider Electric declaration of conformity |
| REACH | Reference not containing SVHC above the threshold |
| Product environmental profile | Available |
| Product end of life instructions | Need no specific recycling operations |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.