


ORDERING INFORMATION

Order code: 62920
 Description: BMH0175/QUADTAP/C/CWA/H/K/STD
 UPC: 69549629202



SPECIFICATIONS

Ballast type: Magnetic metal halide
 Ballast style: Core and coil
 Circuit type: CWA
 ANSI code: M57
 Input voltage (V): 120/208/240/277
 Input frequency (Hz): 60
 Line volt regulation: 10 %
 Line watt regulation: 10 %
 Insulation class: H (180)

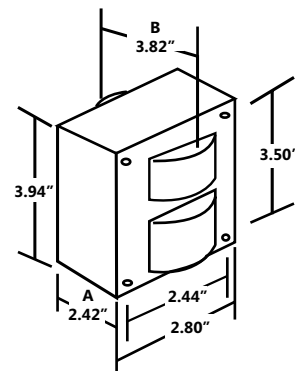

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	1.70	1.82	1.31	175	213	303	60	B	5	0.92-1.30	0.90	-20°F / -30°C
208	1.00	1.04	0.79	175	213	303	104	B	3	0.52-0.75	0.90	-20°F / -30°C
240	0.86	0.92	0.66	175	213	303	120	B	3	0.45-0.65	0.90	-20°F / -30°C
277	0.74	0.79	0.56	175	213	303	140	B	2	0.40-0.57	0.90	-20°F / -30°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	275 - 340
Short circuit:	1.50 - 1.90

BALLAST DIMENSIONS


Dimension A:	2.42"
Dimension B:	3.82"
Lead lengths:	12" - 14"
Weight (lbs) :	6.83

WIRING DIAGRAM


Ground ballast core

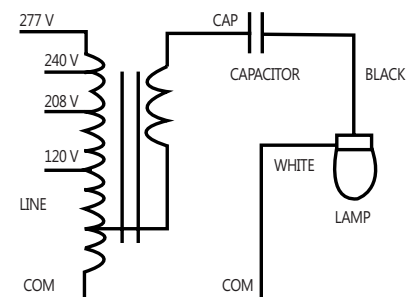

BRACKET

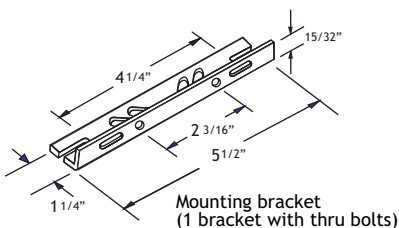

CAPACITOR



Rating: 10 ± 3% Mfd
 400 VAC min.
 Dry film capacitor
 Thermal plastic
 Max. case temp.: 90 °C
 No PCB'S



Mounting clip for capacitor