




TELESCOPIC HOT STICKS

TEL-O-POLE II/THE "NO TWIST" STICK (Patent Pending)

NEW! TEL-O-POLE II, THE "NO TWIST" STICK. A unique triangular design by Hasting Fiberglass, the originators of Telescoping Hot Sticks. All models are heavy duty designed.

FEATURES AND BENEFITS

- **TRIANGLE SHAPE** - Enables each section to "Lock In automatically." No more twisting and turning to lock sections.
- **HIGH VISIBILITY** - Fluorescent tip section is highly visible and has a foam core. All tip sections are 1.15" diameter. All sections are 100% tested per OSHA and ASTM F-711.
- **EXTRA REACH** - New 40' model now available.
- **RE-DESIGNED LOCK BUTTONS** - New shape and larger size are easier to operate with and without gloves.
- **MORE VERSATILE** - Use only the number of required sections to perform each job, Example: A 40 ft. (12.2 Meters) tool can be reduced to a 20 ft. (6.1 Meters) working height by depressing the lock button and sliding the bottom sections off. This allows for a lightweight tool to perform the work easier.
- **EASY DISASSEMBLY** - Simply depress the lock button and slide section, or sections, out. No tools are required for disassembly.
- **ERGONOMIC DESIGN** - Gives the operator a "better gripping" surface for better control
- **REDUCES INVENTORY** - Only one size lock button and spring for replacement needs.
- **EASY MAINTENANCE** - All sections have a smooth glossy surface for routine cleaning and waxing.
- **NEW BASE CAP** - Cushions and protects base end.
- **IMPROVED UNIVERSAL HEAD** - Strong aluminum alloy head incorporates corona discharge design and "includes a captive Belleville washer" to hold universal attachments securely.

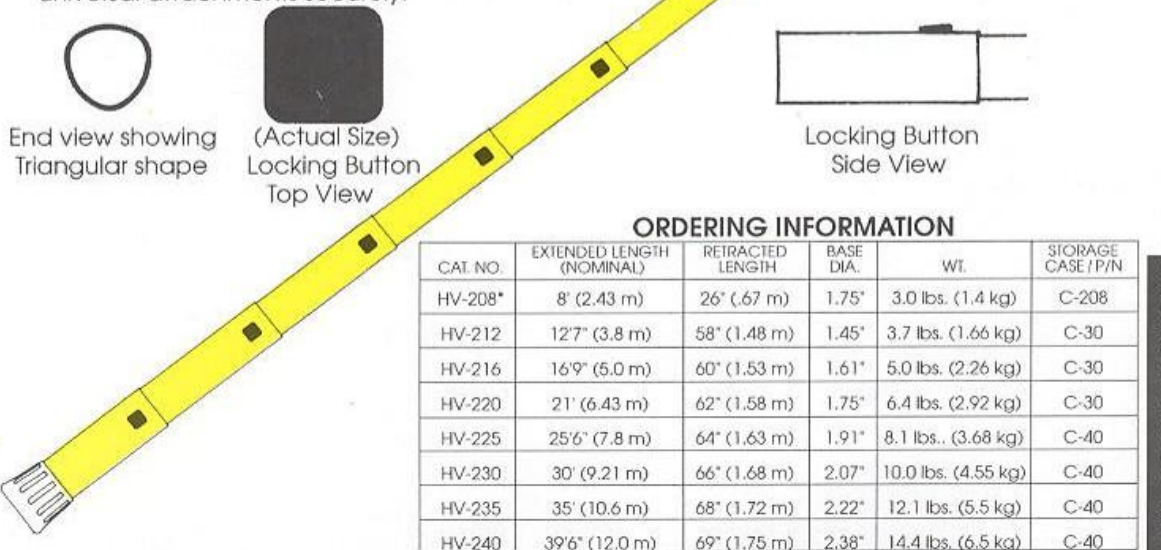

ORDERING INFORMATION

CAT. NO.	EXTENDED LENGTH (NOMINAL)	RETRACTED LENGTH	BASE DIA.	WT.	STORAGE CASE I/P/N
HV-208*	8' (2.43 m)	26" (.67 m)	1.75"	3.0 lbs. (1.4 kg)	C-208
HV-212	12'7" (3.8 m)	58" (1.48 m)	1.45"	3.7 lbs. (1.66 kg)	C-30
HV-216	16'9" (5.0 m)	60" (1.53 m)	1.61"	5.0 lbs. (2.26 kg)	C-30
HV-220	21' (6.43 m)	62" (1.58 m)	1.75"	6.4 lbs. (2.92 kg)	C-30
HV-225	25'6" (7.8 m)	64" (1.63 m)	1.91"	8.1 lbs. (3.68 kg)	C-40
HV-230	30' (9.21 m)	66" (1.68 m)	2.07"	10.0 lbs. (4.55 kg)	C-40
HV-235	35' (10.6 m)	68" (1.72 m)	2.22"	12.1 lbs. (5.5 kg)	C-40
HV-240	39'6" (12.0 m)	69" (1.75 m)	2.38"	14.4 lbs. (6.5 kg)	C-40

NOTE: See other side for component parts

*HV-208 can be stored in Cat. No. 06-185 cannister shown on cat. page G-4.

A-a TELESCOPIC STICKS

© COPYRIGHT 02/01
PRINTED IN U.S.A.



PHONE: (616) 945-5541
FAX: (616) 945-4623
www.hfgp.com • E-mail: hasting@hfgp.com
P.O. BOX 218, 770 COOK ROAD
HASTINGS, MICHIGAN 49058-0218

A-a