
Eliminates the Potential

- for Duct Cutting
- ▲ Lower Elongation Reduces Snap-back and Enhances Worker Safety
- Reduces Tension at the Start of a Pull
- Sequential Footage or Metric Markings
- ✓ Reduces Material, Inventory and Freight Costs
- ▲Reduce labor costs



3 IN 1 PREMISE MULETAPE® PRODUCT ORDERING INFORMATION

ITEM #	PRODUCT	STRENGTH lbs.	TYPICAL BOWLINE STRENGTH	TYPICAL MULEKNOT STRENGTH	PAIL QUANTITY	APPROX. PAIL WEIGHT	PAILS PER PALLET
41271	WP400P	400 lbs.	190 I bs.	300 lbs.	4,500 ft.	13 lbs.	36
68461	WP1250P	1,250 lbs.	595 lbs.	940 lbs.	2,100 ft.	12 lbs.	36
41325	WP1800P	1,800 lbs.	830 lbs.	1,400 lbs.	1,300 ft.	14 lbs.	36
70381	WP2500P	2,500 lbs.	1,190 l bs.	1,875 lbs.	750 ft.	21 l bs.	36

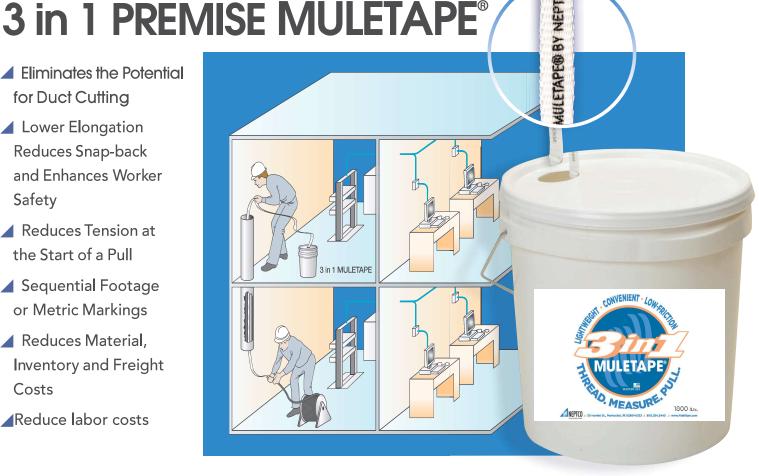

NEPTCO only warrants that its products will work in a manner consistent with the capabilities described. This information corresponds to our current knowledge of the subject and it is not intended to substitute for any testing you may need to conduct to determine suitability of our product for your particular purpose.

Except for the express warranty and limited remedies described herein, NEPTCO DISCLAIMS ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.

The Buyer's remedies under the limited warranty stated above shall be limited to a return of the purchase price of the product. NEPTCO and its authorized agents shall not be liable for any other damages including consequential damages, incurred in connection with the use or performance of the product.

This warranty shall be void if the product has been tampered with or improperly used.

NEPTCO reserves the right to improve, enhance, and / or modify the features and specifications of these products.



MULETAPE®, is intended for use only by cable installation professionals. Do not strap, bind or lift items with this

