
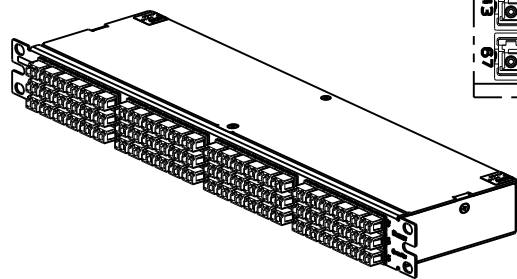


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| FIBER TYPE | PANDUIT PART NUMBER | DESCRIPTION |
|--------------------|---|---|
| SINGLEMODE OS1/OS2 | FIRS9N-1A12-10S | QUICKNET HIGH DENSITY CASSETTE STANDARD FIBER STRAIGHT THROUGH |
| | FIRS9N-1A12-10F | QUICKNET HIGH DENSITY CASSETTE STANDARD FIBER - FLIPPED PAIR |
| MULTIMODE OM3/OM4 | FIRSXN-1A12-10S | QUICKNET HIGH DENSITY CASSETTE OM3 STANDARD FIBER STRAIGHT THROUGH |
| | FIRSXN-1A12-10F | QUICKNET HIGH DENSITY CASSETTE OM3 STANDARD FIBER - FLIPPED PAIR |
| | FIRSXO-1A12-10S | QUICKNET HIGH DENSITY CASSETTE OM3 OPTIMIZED FIBER STRAIGHT THROUGH |
| | FIRSXO-1A12-10F | QUICKNET HIGH DENSITY CASSETTE OM3 OPTIMIZED FIBER - FLIPPED PAIR |
| | FIRSZN-1A12-10S | QUICKNET HIGH DENSITY CASSETTE OM4 STANDARD FIBER STRAIGHT THROUGH |
| | FIRSZN-1A12-10F | QUICKNET HIGH DENSITY CASSETTE OM4 STANDARD FIBER - FLIPPED PAIR |
| | FIRSZO-1A12-10S | QUICKNET HIGH DENSITY CASSETTE OM4 OPTIMIZED FIBER STRAIGHT THROUGH |
| FIRSZO-1A12-10F | QUICKNET HIGH DENSITY CASSETTE OM4 OPTIMIZED FIBER - FLIPPED PAIR | |

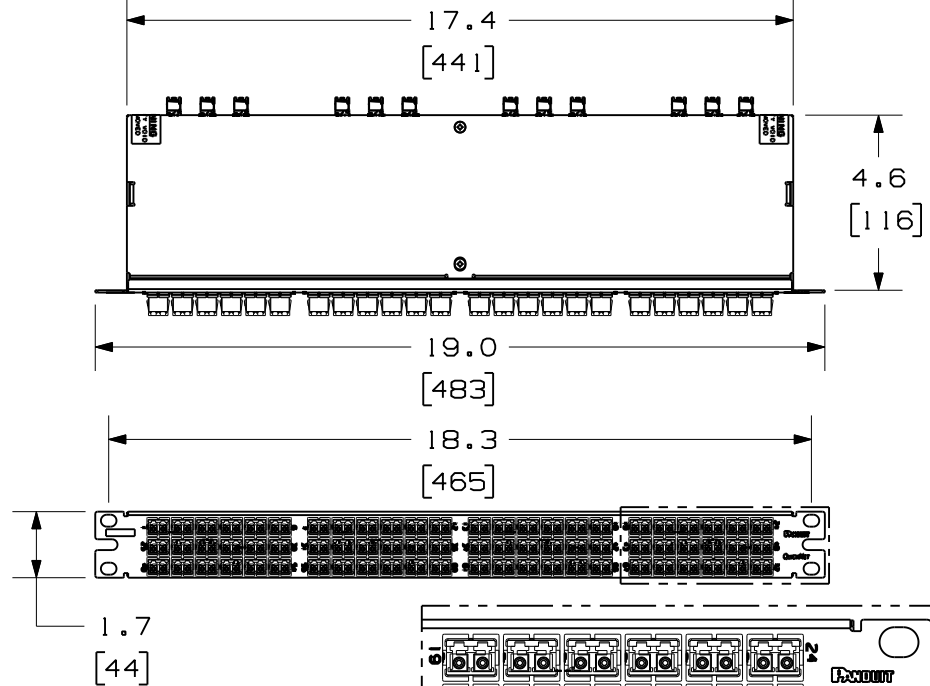

NOTES:

- SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITIES.
- SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- EXCEPT FOR THE PART NUMBERS ENDING IN "F", THE HDQ CASSETTES LISTED ON THIS PRINT FOLLOW TYPE A ARRAY AS CITED IN TIA-568-C.3
- PART NUMBERS ENDING IN "F" INDICATE FLIPPED PAIRS. THE "F" OPTION REPLACES THE NEED FOR AN A-A PATCH CORD, ONLY REQUIRING TWO A-B PATCH CORDS IN THE METHOD A SYSTEM. REFERENCE TIA-568-C.0 FOR DETAILS ON METHOD A CONNECTIVITY.
- MATERIALS:
A. CASSETTE MATERIAL: ALUMINUM/STEEL
B. ADAPTER: COMPOSITE PLASTIC
- ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTIONS OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
- CASSETTE WEIGHT: 49.6oz (1406g)
- DIMENSIONS IN BRACKETS ARE METRIC

| | | | | |
|--|---------|--|-------|------|
| TITLE | | 1RU HDQ SERIES 144 FIBER CASSETTE 12 FIBER MPO TO LC WITH STANDARD LABELING TYPE A ARRAY FOR METHOD A CONNECTIVITY CUSTOMER DRAWING | | |
| ITEM REVISION NAME | | 12F179AA/00.PRT | | |
| DATASET FILE NAME | | 12F179AA_DC/00A.PRT | | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) | | MATERIAL: SEE NOTES | | |
| ALL DIMENSIONS ARE FOR REFERENCE ONLY | | DRAWING NUMBER: 12F179AA-DC | | |
| THIRD ANGLE PROJECTION | | SHT 1 OF 1 | | |
| DRAWN BY | DATE | CHK | SCALE | SIZE |
| JESA | 9/26/12 | WJM | NONE | A |

| | | | | | | |
|-----|---------|------|-----|------|------------------------|-------------|
| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
| R | 9/26/12 | JESA | WJM | CHDE | RELEASED TO PRODUCTION | 12F179AA-DC |