



T5 TuffGuard™ Coated

F21T5/841 TG

When you select Philips TuffGuard™ Fluorescent lamp with ALTO® lamp technology, you are reducing the impact on the environment, while the coating helps to protect your customers, employees, and reputation. Philips TuffGuard™ fluorescent lamps meet sustainability requirements because they reduce the impact on the environment with low mercury, energy efficiency and long life. The patented green endcaps mean you're using ALTO low-mercury technology. The 16 mils thick coating on TuffGuard™ fluorescent lamps forms a protective seal from end to end and is guaranteed to last the average rated life of the lamp under specific conditions

Product data

• General Characteristics

System Description	High Efficiency
Base	Miniature Bipin
Base Information	Green [Green Base]
Bulb	T5 [16 mm]
Rated Avg. Life	20000 hr
Life to 10% fail	0 hr
Preheat EL,3h	
LSF HF Preheat	85 %
20000h Rated,3h	
LSF HF Preheat	94 %
16000h Rated,3h	
LSF HF Preheat	95 %
12000h Rated,3h	
LSF HF Preheat	97 %
8000h Rated,3h	
LSF HF Preheat	98 %
6000h Rated,3h	
LSF HF Preheat	98 %
4000h Rated,3h	
LSF HF Preheat	99 %
2000h Rated,3h	

Lum Efficacy Rated	90 Lm/W
HF 25°C	
Lum Efficacy Rated	101 Lm/W
HF 35°C	
LLMF HF 20000h	88 %
Rated	
LLMF HF 16000h	90 %
Rated	
LLMF HF 12000h	91 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 2000h	96 %
Rated	
Luminous Flux EL	1920 Lm
25°C, Rated	
Luminous Flux EL	1920 Lm
25°C, Nominal	
Design Temperature	35 C

• Light Technical Characteristics

Color Code	841 [CCT of 4100K]
Color Rendering	82 Ra8
Index	
Color Designation	Cool White
Color Temperature	4100 K
Chromaticity Coordinate X	381 -
Chromaticity Coordinate Y	379 -
Initial Lumens	2100 Lm
Luminance Average	1.5 cd/cm ²
EL 25°C	

• Electrical Characteristics

Watts	21 W
Lamp Voltage EL	125 V
25°C	
Lamp Current EL	0.170 A
25°C	
Dimmable	Yes
Lamp Wattage EL	20.7 W
35°C	
Lamp Current EL	0.170 A
35°C	

PHILIPS

sense and simplicity

T5 TuffGuard™ Coated

Lamp Voltage EL 35°C	123 V
Lamp Wattage EL 25°C, Rated	21.3 W
Lamp Wattage EL 25°C, Nominal	21 W

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.4 mg

• Measuring Conditions

Calibration Current	0.170 A
HF Generator Rated Voltage	246 V
Resistor	725 ohm


• Product Dimensions

Base Face to Base Face A	849.0 (max) mm
Insertion Length B	853.7 (min), 856.1 (max) mm
Overall Length C	863.2 (max) mm
Diameter D	17 (max) mm

• Product Data


Product number	166694
Full product name	F21T5/841 TG
Short product name	F21T5/841/ALTO TG 40PK
Pieces per Sku	1
Skus/Case	40
Bar code on pack	46677166694
Bar code on case	50046677166699
Logistics code(s)	927890384101
tpd_ilcos_cd	FDH-21/40/1B-L/P-G5-16
eop_net_weight_pp	0.001 kg

Dimensional drawing

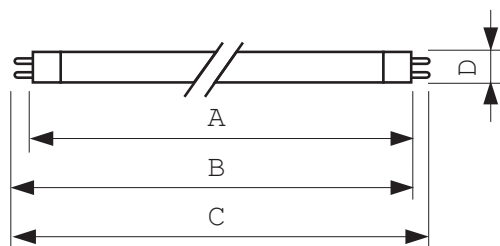

G5, T5

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HE F21T5/841 TG	849.0	853.7	856.1	863.2	17



G5



© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, February 1
data subject to change