

GUY STRAIN INSULATOR

CAT. NO. VI 4604

ANSI CLASS NO. 54-2

16

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- FLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE	IN	1.87
MAXIMUM CABLE DIA.	IN	.50

MECHANICAL VALUES

TENSILE STRENGTH	LB	12,000
------------------	----	--------


ELECTRICAL VALUES

60 HERTZ FLASHOVER-DRY	kV	30
60 HERTZ FLASHOVER-WET	kV	15

PACKING INFORMATION

NET WEIGHT PER 100	LB	173
PACKED WEIGHT PER 100	LB	181
NO. IN STANDARD PACKAGE		25

THIS DRAWING IS THE PROPERTY OF  
 VICTOR INSULATORS, INC. AND CONTAINS  
 PROPRIETARY AND CONFIDENTIAL INFORMATION  
 WHICH MUST NOT BE REPRODUCED, COPIED,  
 OR DISCLOSED, OTHER THAN AS EXPRESSLY  
 AUTHORIZED BY VICTOR INSULATORS, INC.

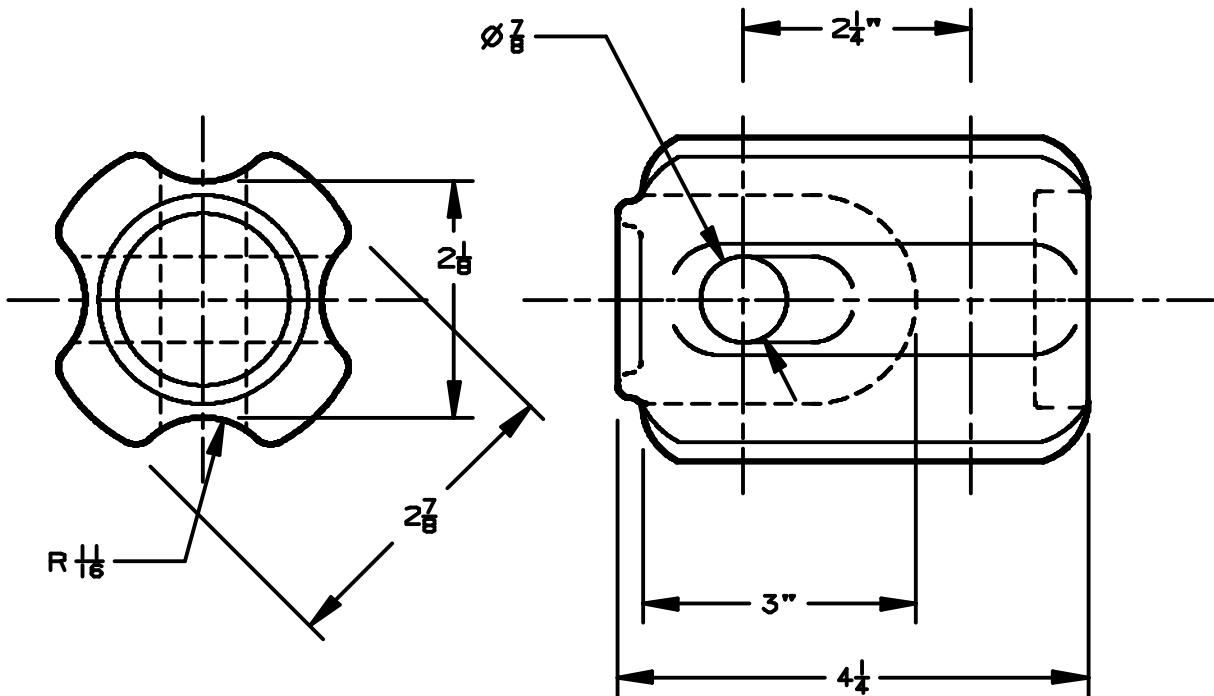

3-18-02

TM PP AS

**V** INSULATORS  
 VICTOR INSULATORS, INC.  
 280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (716)924-2127

VI 4604