


52®/53® Series Liquidtight Fittings and Flexible Metallic Conduits

Fittings for liquidtight flexible metal conduit with metric threads of PG form (DIN 40430).

PG Metric Thread Liquidtight Fittings*

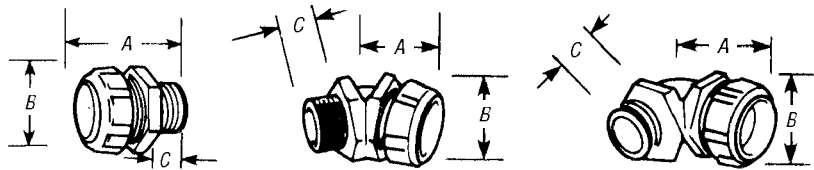

CAT. NO.	FLEXIBLE CONDUIT SIZE	METRIC PG THREAD	A MM	B MM	C MM
Nylon-insulated straight connectors					
7330	¼"	9	36	21	12
7360	⅝"	9	36	26	12
7361	¾"	11	40	29	14
7362	¾"	13.5	40	29	14
7363	1½"	16	41	35	14
7364	¾"	21	43	42	14
7365	1"	29	56	47	19
7366	1½"	36	67	58	21
7367	1½"	42	72	69	21
7368	2"	48	81	83	21

*All items shown on this page are suitable for use in hazardous location where general-purpose equipment is specifically permitted by the NEC®; Class I Div. 2, Class II, Div. 1 & 2; Class III, Div. 1 & 2.

†UL Listed as grounding means under NEC 351-7.

UL Listed liquidtight. CSA Certified watertight.


UL File No. E-23018

CSA File No. 2884

CAT. NO.	FLEXIBLE CONDUIT SIZE	METRIC PG THREAD	A MM	B MM	C MM
Nylon-insulated 45° angle connectors					
7341	¾"	11	27	29	14
7342	¾"	13.5	27	29	14
7343	½"	16	30	35	14
7344-TB	¾"	21	34	42	14
7345	1"	29	44	47	19
7346	1½"	36	51	58	19
7347	1½"	42	60	69	21
7348-TB	2"	48	73	76	24
Nylon-insulated 90° angle connectors					
7351	¾"	11	37	29	14
7352	¾"	13.5	37	29	14
7353	½"	16	40	35	14
7354	¾"	21	44	42	14
7355	1"	29	56	47	21
7356	1½"	36	70	58	21
7357	1½"	42	75	69	21
7358	2"	48	87	83	24

Aluminum mechanical adapter with internal threads to mate with NPT threaded fittings and MS type connectors.

NPT/MS Connector Adapters

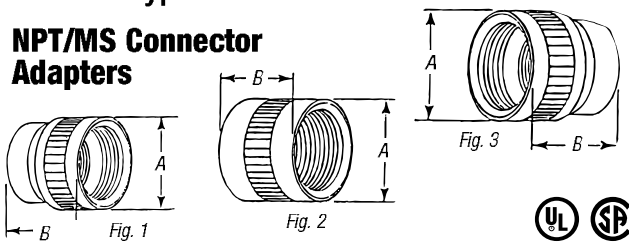


CAT. NO.	N.P.T. THREAD	AN-MS CONNECTOR SHELL SIZE	THREAD SIZE	STD. PKG.	DIMENSIONS (IN.)		
					A	FIG.	B
MSA05014	½"	14, 14S	¾"-20 UNEF-2B	10	1.000	1	1.175
MSA05016	½"	16, 16S	¾"-20 UNEF-2B	10	1.000	2	1.175
MSA05018	½"	18	1"-20 UNEF-2B	10	1.125	3	1.175
MSA07516	¾"	16, 16S	¾"-20 UNEF-2B	10	1.250	1	1.356
MSA07518	¾"	18	1"-20 UNEF-2B	10	1.250	1	1.300
MSA07520	¾"	20, 22	1⅜"-18 UNEF-2B	10	1.375	3	1.300
MSA10020	1"	20, 22	1⅜"-18 UNEF-2B	10	1.500	1	1.431
MSA10024	1"	24, 28	1⅜"-18 UNEF-2B	10	1.625	3	1.313
MSA10032	1"	32	1¾"-18 UNS-2B	10	2.000	3	1.576
MSA10036	1"	36	2"-18 UNS-2B	10	2.250	3	1.738

All items shown on this page are suitable for use in hazardous location where general-purpose equipment is specifically permitted by the NEC; Class I Div. 2; Class II, Div. 1 & 2; Class III, Div. 1 & 2.

Steel T&B® Liquidtight flexible metal and non-metallic fittings with internal threads to accept AN-MS connector shells.

Liquidtight Flexible Metal/MS Connectors

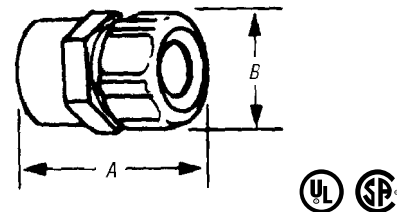

CAT. NO.	TRADE SIZE	AN-MS CONN. SHELL SIZE	INTERNAL THREAD	DIMENSIONS (IN.)	
				A	B
LTA03810	¾"	10SL, 12, 12S	¾"-24 UNEF-2B	1½	1
LTA05014	½"	14, 14S	¾"-20 UNEF-2B	1⅞	1¼
LTA05016	½"	16, 16S	¾"-20 UNEF-2B	1⅞	1¼
LTA05018	½"	18	1"-20 UNEF-2B	1⅞	1¼
LTA07520	¾"	20, 22	1⅜"-18 UNEF-2B	1⅞	1½
LTA10020	1"	20, 22	1⅜"-18 UNEF-2B	1¾	1⅝
LTA10024	1"	25, 28	1⅜"-18 UNEF-2B	1¾	1⅝

UL File No. E 23018

CSA File No. 2884