



LED A19-A21

5A19/PER/927-22/P/E26/WG 6/1FB T20

Philips A19/A21 LED lamps are the smart alternative to standard incandescent. The unique lamp design provides omni-directional light with excellent dimming performance.

Product data

| General Information | |
|------------------------|------------------------------------|
| Base | E26 [Single Contact Medium Screw] |
| EU RoHS compliant | Yes |
| Nominal Lifetime (Nom) | 15000 h |
| Switching Cycle | 50000X |
| Technical Type | 5-40W |

| Light Technical | |
|---------------------------------------|-------------------------------|
| Color Code | 922-927 [CCT of 2200K-2700K] |
| Beam Angle (Nom) | 250 ° |
| Initial lumen (Nom) | 450 lm |
| Color Designation | Warm White (WW) |
| Luminous Efficacy (rated) (Nom) | 90.00 lm/W |
| Color Consistency | <4 |
| Color Rendering Index (Nom) | 90 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |

| Operating and Electrical | |
|--------------------------|-------|
| Input Frequency | 60 Hz |
| Power (Rated) (Nom) | 5 W |
| Lamp Current (Nom) | 55 mA |
| Wattage Equivalent | 40 W |
| Starting Time (Nom) | 0.5 s |

| | |
|---------------------------------|-------|
| Warm Up Time to 60% Light (Nom) | 0.5 s |
| Power Factor (Nom) | 0.7 |
| Voltage (Nom) | 120 V |

| Temperature | |
|----------------------|-------|
| T-Case Maximum (Nom) | 65 °C |


| Controls and Dimming | |
|----------------------|-----|
| Dimmable | Yes |

| Mechanical and Housing | |
|------------------------|---------|
| Bulb Finish | Frosted |

| Product Data | |
|---------------------------------|------------------------------------|
| Order product name | 5A19/PER/927-22/P/E26/WG 6/1FB T20 |
| EAN/UPC - Product | 046677479428 |
| Order code | 479428 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 6 |
| Material Nr. (12NC) | 929001940704 |
| Net Weight (Piece) | 0.084 kg |

LED A19-A21


Dimensional drawing

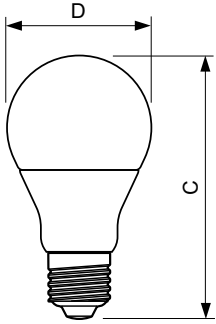


Bulb A19 5-40W 450lm 2200-2700K E26 D

| Product | D | C |
|------------------------------------|---------|----------|
| 5A19/PER/927-22/P/E26/WG 6/1FB T20 | 62.5 mm | 111.5 mm |


Photometric data



LED Bulb A19 E26 5-40W

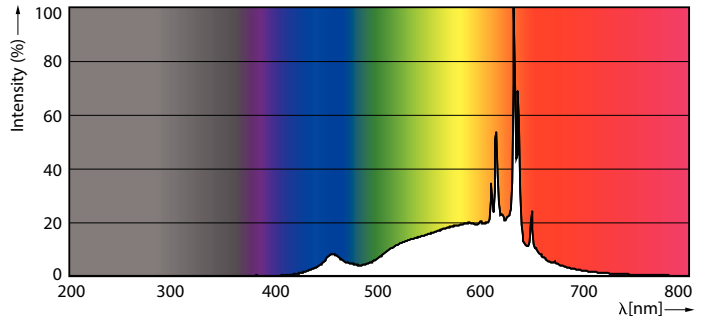



LEDBulb A19 E26 5-40W



LEDBulb A19 E26 5-40W

LED A19-A21

Lifetime

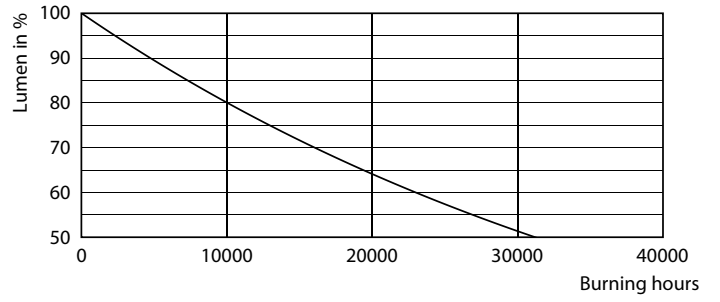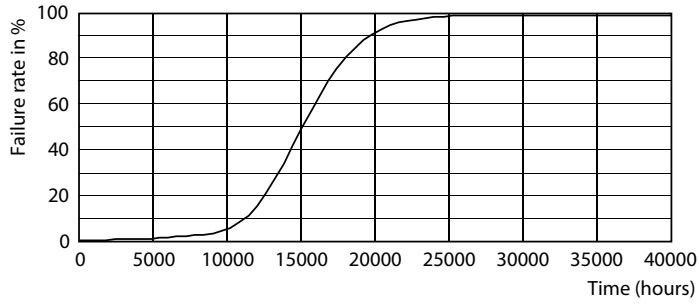

LEDBulb E26

LEDBulb E26

