

MULTIPLES OF RATED CURRENT



QO® MOLDED CASE CIRCUIT BREAKERS  
CHARACTERISTIC TRIP CURVE NO. 730-6

CIRCUIT BREAKER INFORMATION

Circuit Breaker Prefix	Continuous Ampere Rating	Maximum AC Voltage	Number of Poles
QO-HID	45-50	120/240	1, 2
QOU	45-50	240	3
QO-PL	45-60	120/240	2
QO, QOU	45-70	120/240	1, 2
QO	45-70	240	3
QO-SWN	50	120	2
QO-SWN	50	120/240	3
QOM	50-60	120/240	2
QOM-VH	50-60	120/240	2

This curve is to be used for application and coordination purposes only. The **EZ-AMP** overlay feature at the bottom of the page should be used during coordination studies.

All time/current characteristic curve data is based on 40°C ambient cold start. Terminations are made with conductors of appropriate length and ratings.

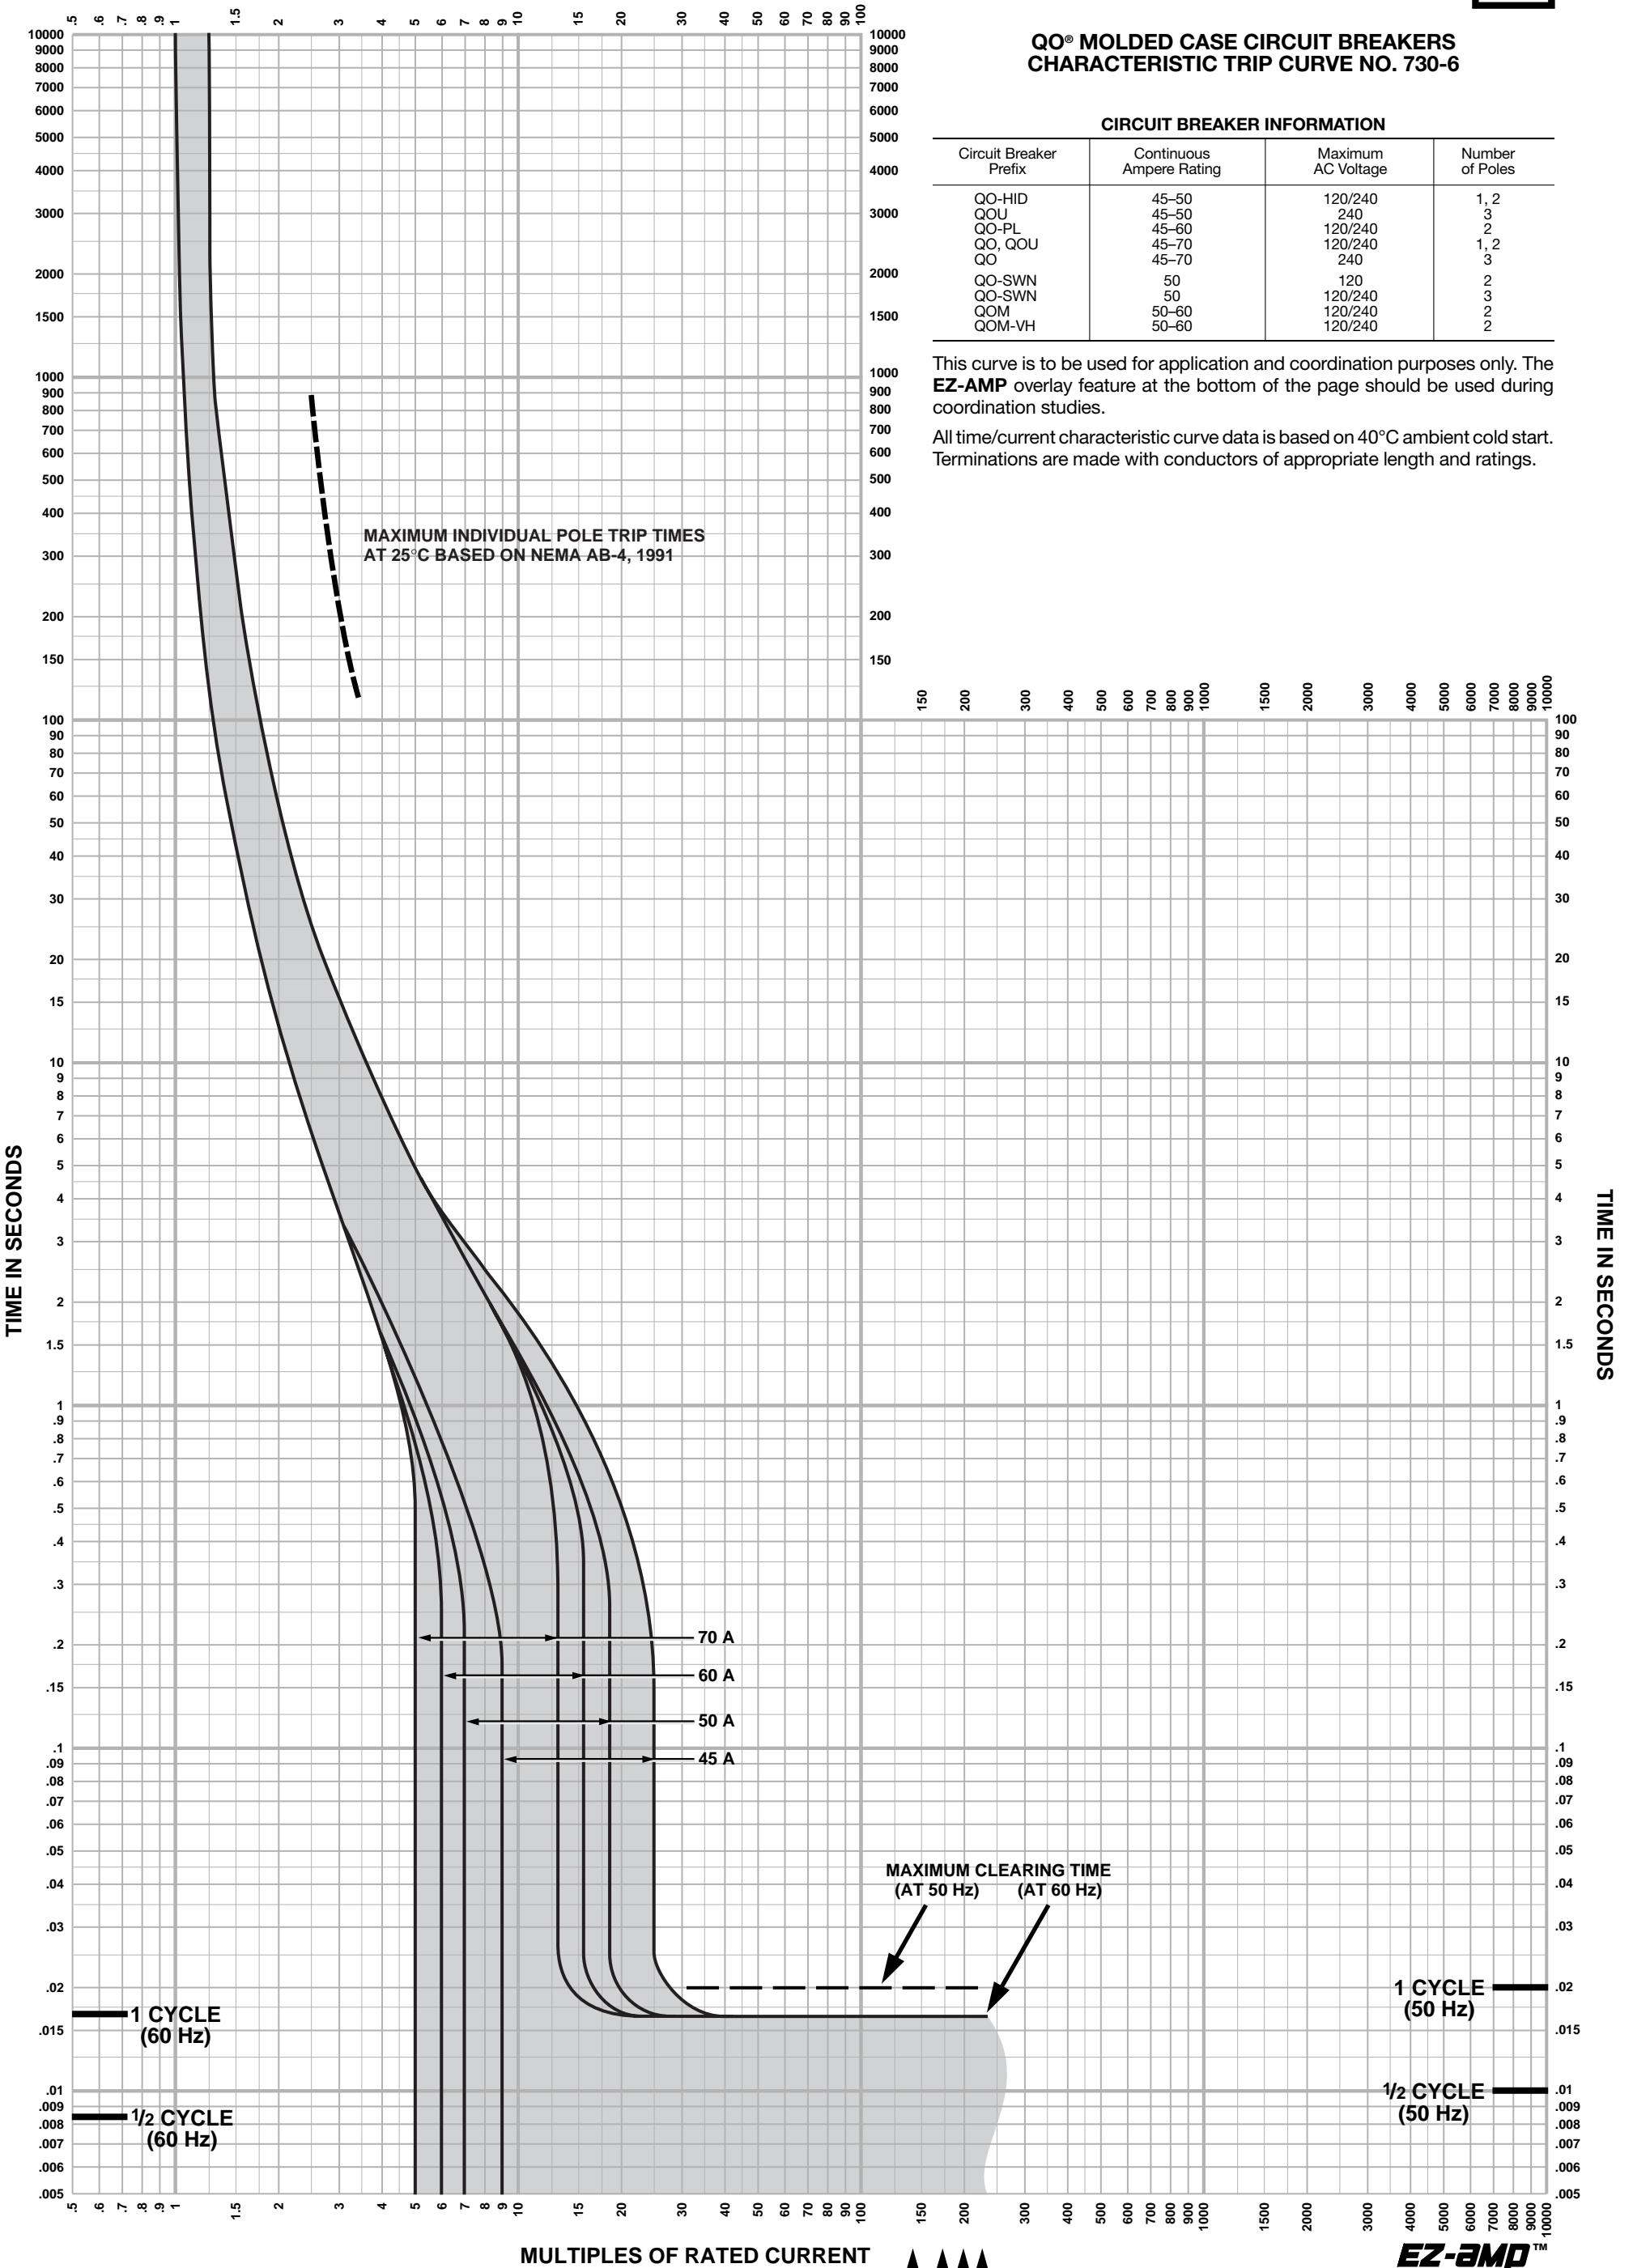

**EZ-AMP**™