

# T8

## 14.5T8/COR/48-850/MF21/G 10/1

Philips MainsFit (UL Type B) CorePro T8 LED tubes deliver high-quality, flicker free performance at an affordable price. The UL Type B LED tubes are designed with easy installation and long-term maintenance simplicity in mind. Upgrade your lighting to Philips and realize 50,000 hour LED lifetime backed by a 5-year, full replacement limited warranty. The DLC 5.1 listed products are compatible with Philips new PTB15D emergency driver meeting UL 924 requirements.

### Product data

General Information	
Base	G13 [ Medium Bi-Pin Fluorescent]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
Technical Type	14.5-32W
Light Technical	
Color Code	850 [ CCT of 5000K]
Beam Angle (Nom)	240 °
Initial lumen (Nom)	2100 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	144.00 lm/W
Color Consistency	<5
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	14.5 W

Lamp Current (Max)	124 mA
Lamp Current (Min)	58 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
UL Type	Type B - bypass the ballast
Power Factor (Nom)	0.9
Voltage (Nom)	120-277 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	Limited
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass

# T8


Product Length	48 in
Bulb Shape	Tube, double-ended
<b>Approval and Application</b>	
Energy Efficiency Label (EEL)	Not applicable
Energy Saving Product	Yes
Approbation Marks	RoHS compliance UL certificate DLC compliance
Energy Consumption kWh/1000 h	- kWh

## Product Data

Order product name	14.5T8/COR/48-850/MF21/G 10/1
--------------------	-------------------------------

EAN/UPC - Product	046677563554
Order code	563551
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002484704
Net Weight (Piece)	0.215 kg
Model Number	9290024847


## Dimensional drawing

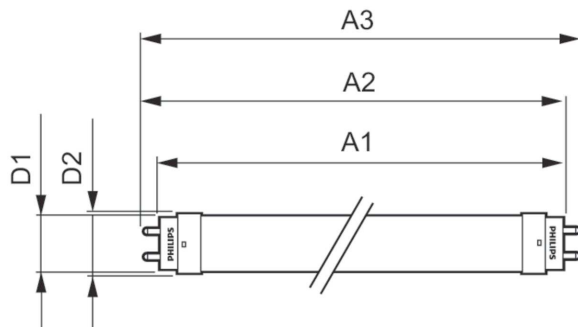


TLED T8 120-277V 14.5-32W 2100lm 5000K

Product	D1	D2	A1	A2	A3
14.5T8/COR/48-850/MF21/G 10/1	25.7 mm	28 mm	1198.2 mm	1205.3 mm	1212.4 mm

## Photometric data




LEDtube COR 14,5W G13 2100lm 850

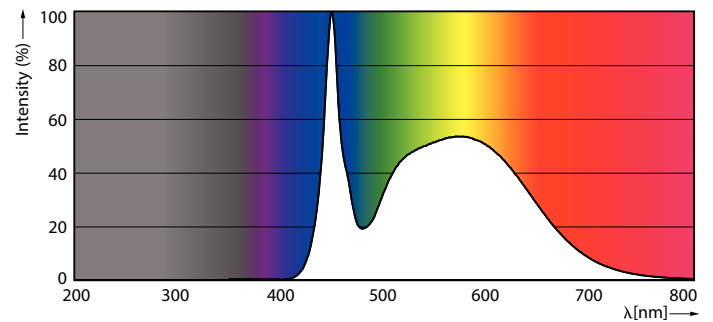


LEDtube COR 9,9W G13 1600lm 850

Photometric data




LEDtube COR 9,9W G13 1550lm


Lifetime

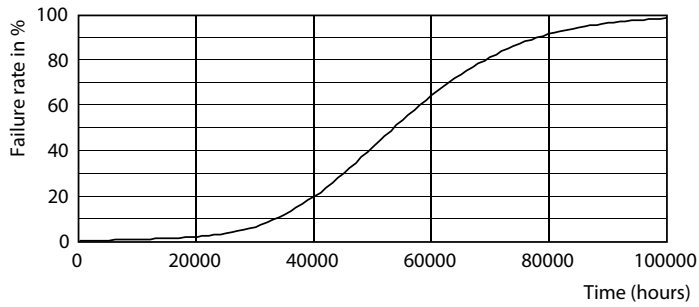


LEDtube 50K-LED

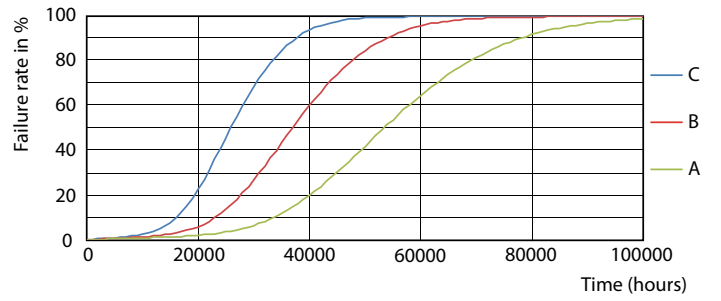

LEDtube 50K FailureRate-LED

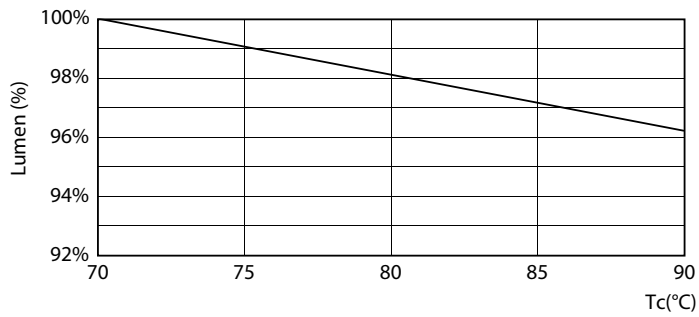

LEDtube COR 9,9W 50K LumenVsTc

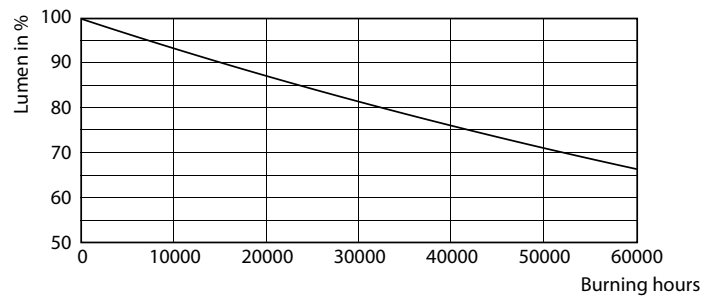

LEDtube 50K-LMP

Lifetime



LEDtube 50K LifetimeVsTc-LED

