


T&B® Fittings



T&B Catalog Number: 5232
UPC Number: 78621005232
Description: 1/2" Straight steel liquidtight connector

Status: Active

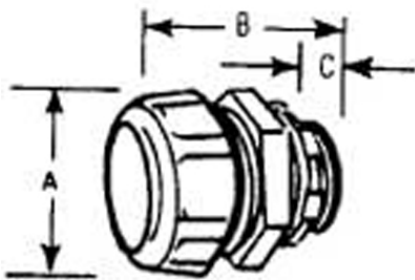

Features	
-	Ability to install quickly with low torque effort
Application	
-	Used where flexible metal raceway is installed in outdoor or indoor locations where exposed to continuous or intermittent moisture.
-	To positively bond conduit to box or enclosure.
General	
-Material	Steel
-Finish	Electro Zinc Plated with Chromate Coating
-Conduit Size (inches)	39815
Dimension Information	
-Dimension A (inches)	1 3/8
-Dimension B (inches)	1 9/16
-Dimension C (inches)	9/16
-Conduit Size (inches)	39815
Specifications	
-3dmodel	Available on Website
Accessories & Components	
-Wiremesh Grips for Liquidtight Fittings	WMG-LT2
Packaging	
-T&B Inner Pack	25
-Package in Units	100
-T&B Sold in UOM	Each
-T&B Weight Per UOM	17.8 lbs. per 100
Application Support	
-Product Overview	Available on Website
Certifications	
-RoHS Compliance	Yes
Certifications	



File Nbr:
E 23018

For further technical assistance, please contact us...

Thomas & Betts - USA
 8155 T&B Blvd.
 Memphis, TN 38125
 www.tnb.com

T&B Technical Support
 MS 3B-50
 8155 T&B Blvd.
 Memphis, TN 38125

Hours: 7AM - 6PM CDT
 Monday-Friday
 Phone: (888) 862-3289
 Fax: (901) 252-1321
 Email:techsupport@tnb.com