

Technical data sheet - LUTZE DRIVEFLEX® 3 SYMMETRICAL 1000 V with Three Symmetrical Grounds and UL 1 kV Voltage Rating



Flexible Composite VFD, Servo &
Motor Supply Cable - Shielded

Identification	Type	DR 3 XLPE (C) PVC (3x2/0+3xAWG8)
	Part-No.	A2202/003

Use/Application/Characteristics

Application

- Shielded VFD and Motor cable to connect power from drives to motors
- Three insulated symmetrical grounds design helps to reduce stray currents
- Cable design for harsh industrial environments and operating conditions with high noise levels
- 1 kV rated XLPE insulation with low capacitance, ideal for applications with **high voltage spikes and long cable runs**
- Compliant with **NFPA 79** for wiring of industrial machinery
- **TC-ER** for use with cable trays **without conduit**, which can reduce material and labor costs
- WTTC – wind turbine tray cable rating for use in wind power generation
- Dry, damp or wet conditions

Characteristics

- Flexible XLPE conductors
- Three symmetrical grounds (PE)
- Non-wicking fillers
- Effective dual layer shield for best EMC results
- Specially formulated jacket for oil resistance and easy strip design
- Low capacitance cable
- Sunlight resistant
- Direct burial
- UL Type TC-Exposed Run
- Talc free and silicone free

15.08.2018 – Subject to technical modification

Part-No. A2202/003

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet - LUTZE DRIVEFLEX[®] 3 SYMMETRICAL 1000 V with Three Symmetrical Grounds and UL 1 kV Voltage Rating

Construction

Description	DRIVEFLEX [®] 3 SYMMETRICAL GROUNDS
Number of conductors/cross-section	(3xAWG2/0+3xAWG8)
Jacket material	PVC
Jacket color	black RAL 9005
Outer Ø	39.1 mm
Outer Ø	1.54 inches
Weight	2187 Lbs/Mft
Cu-Index	1620 Lbs/Mft

Element 1

Element construction	2/0/3C
Conductor construction	1022 strands
Conductor	AWG conductor CU-wire tin-plated
Conductor category	fine wire
Conductor marking	black with white number print
Conductor insulation	XLPE XHHW-2

Element 2

Element construction	AWG8/3C
Conductor construction	128 strands
Conductor	AWG conductor CU-wire tin-plated
Conductor category	fine wire
Conductor marking	green/yellow
Conductor insulation	XLPE 3C XHHW-2 (Ground/PEs)

overall construction

Drain wire	CU-wire tin-plated
Overall shield	Foil shield Aluminium laminate Braid shield Tinned copper wires optical cover approx. 80%
Jacket characteristics	Oil resistant Silicone-free

15.08.2018 – Subject to technical modification

Part-No. A2202/003

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet - LUTZE DRIVEFLEX[®] 3 SYMMETRICAL 1000 V with Three Symmetrical Grounds and UL 1 kV Voltage Rating

Technical data

Rated voltage U_N	600 V TC-ER 1000 V Flexible VFD servo cable 90C 1000 V WTTC
Temperature range fixed	-40 °C ... +90 °C
Minimum bending radius fixed	7.5xD

Element 1

Element construction	2/0/3C
----------------------	--------

Element 2

Element construction	AWG8/3C
----------------------	---------


Approvals/Standards

Approvals	cULus WTTC TC-ER cUL TC CIC FT4 Class 1 Div. 2 per NEC Art. 336, 392, 501 UL 1277 UL 2277 Wet/Dry P-07-KA130021-MSHA
Conformity	CE RoHS REACH
Oil resistant according to	Oil Res II

General

Note	CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU
------	--

Symbols

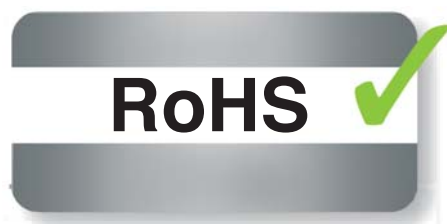

15.08.2018 – Subject to technical modification

Part-No. A2202/003

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet - LUTZE DRIVEFLEX[®] 3 SYMMETRICAL 1000 V with Three Symmetrical Grounds and UL 1 kV Voltage Rating



15.08.2018 – Subject to technical modification

Part-No. A2202/003

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk