

PG5 Disconnect Plugs

Terminal Blocks Accessories

Catalogue Page 1SNK 160 037 S0201



RoHS
RoHS

5.2 mm 0.205 in spacing

Mounting Instructions
Plug In

Features and Benefits

Allow disconnect function when associated with the ZS4-SP and ZS4-SP-R1 terminal blocks.

Ordering Details

Description	Color	Type	Order Code	Pack ^(incl) pieces	Weight (1 pcs) g
Equipped with linking bar	Orange	PG5-R1	1SNK 900 402 R0000	20	3.45

Main Technical Data

Material Specifications	Insulating material	Polyamide		
	Flammability	V0		
	NF F 16 101	I2F3		
Ambient temperature min/max	Service IEC 60068-2-1	-55 +110 °C	-67 +230 F	
	Storage	-55 +110 °C	-67 +230 F	
	Installing	-5 +40 °C	-23 +104 F	
	IEC	cULus - CSA		
Rated current	18 A	20 A		
Rated voltage	400 V	150 V		
Impulse withstand voltage	6000 V			
Protection	IP20	NEMA 1		

Accessories

Description	Color	Type	Order Code	Pack ^(incl) pieces	Weight (1 pcs) g
Blank card	White	MC512	1SNK 140 000 R0000	22	9.00
		MC512PA	1SNK 149 999 R0000	20	10.00
Universal wire markers holder	Grey	UMH	1SNK 900 611 R0000	10	0.20
Self adhesive strip	White	SAT5	1SNK 900 614 R0000	5	6.00

Some accessories may modify the terminal block's ratings. See complete information in "Technical Datasheet".

SHB Shield Connectors

Terminal Blocks Accessories

Catalogue Page 1SNK 160 037 S0201



RoHS
RoHS

Features and Benefits

- Ensure the continuity of your shield connection,
- Various connection solutions available: RILS cable ties, soldering, quick-connect.

Ordering Details

Description	Color	Type	Order Code	Pack ^(incl) pieces	Weight (1 pcs) g
Compatible with double deck terminal blocks		SHB	1SNK 900 602 R0000	20	4.90
Compatible with feed-through terminal blocks		SHBS	1SNK 900 600 R0000	20	3.50

Main Technical Data


Material Specifications	Insulating material	Brass		
Ambient temperature min/max	Service IEC 60068-2-1	-55 +110 °C	-67 +230 F	
	Storage	-55 +110 °C	-67 +230 F	
	Installing	-5 +40 °C	-23 +104 F	
	IEC	cULus - CSA	Ex e	
Rated voltage	Standard use	320 V	175 V	

Accessories

Description	Color	Type	Order Code	Pack ^(incl) pieces	Weight (1 pcs) g
Cable ties		RILS	1SNK 900 627 R0000	10	0.30

Some accessories may modify the terminal block's ratings. See complete information in "Technical Datasheet".

Mounting Instructions

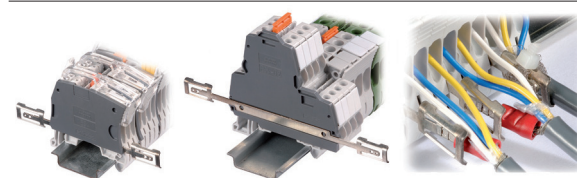

- SHBS is directly fixed on the terminal block,
- SHB is fixed on the ES4-D2 end section.
- Connect the cable shielding on the shielding connector with:
 - RILS cable ties,
 - quick-connect (the shield connector needs to be adapted),
 - soldering iron.

All the technical data for UL/CSA standard and dimensions in inches are in italic.