



World Headquarters
601 Rayovac Drive
Madison, WI 53711
Telephone 1-800-331-4522
Internet www.rayovac.com

Marketing Data Sheet - Batteries

S6600194
Issue R
Memo No: [MDSR0104](#)

Rayovac Stock Number: **926**

Name: **926 GENERAL PURPOSE CARBON ZINC**

ENGINEERING DATA:

Cell Chemistry: Carbon Zinc

Designation: ANSI/NEDA – 926

Nominal Voltage: 12 volts

Approximate Weight: 2 Lb 11 Oz (1.22 Kg)


Approximate Volume: 74 CU IN (1213 CU CM)

Operating Temp. Range: -30° C to 55° C
(-20° F to 130° F)

Terminals: Screw

Shell: Plastic

Environmental: Meets Environmental Protection Agency (EPA) Requirements For Landfill Disposal. No Mercury Added Formulation
[Rayovac Material Safety Data Sheets](#)

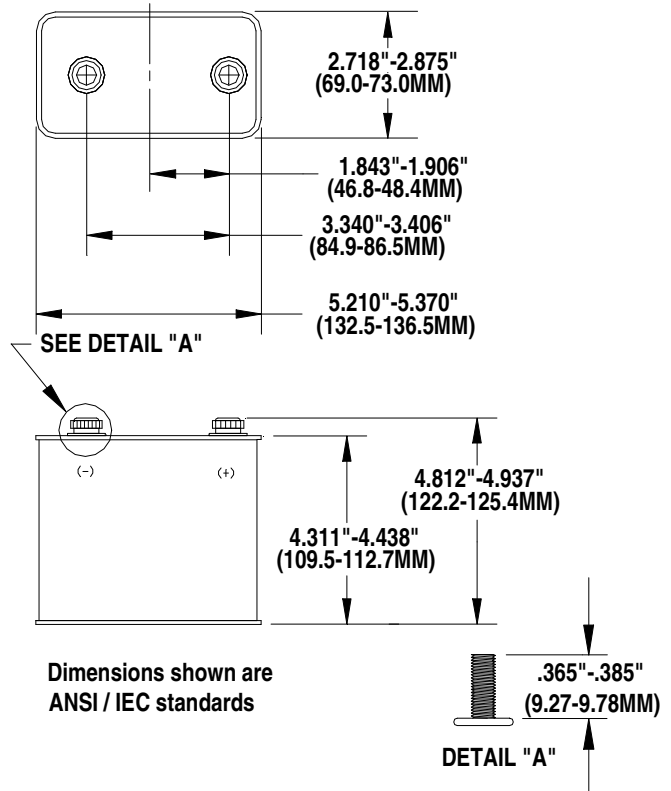

**TYPICAL INITIAL SERVICE AT 70°F (HOURS)
CUTOFF VOLTAGE**

APPLICATION DUTY CYCLE	LOAD (OHMS)	CURRENT (MA AT 9.6V)	CUTOFF VOLTAGE					MAh CAPACITY To 5.2V
			8.8V	8.0V	7.2V	6.0V	5.2V	
PORTABLE LIGHT (30 MIN/HR-8 HR/DAY)	18	533	6.2	9.3	11.7	15.3	17.7	7,900
PORTABLE LIGHT (CONTINUOUS-24 HR/DAY)	18	533	5.4	7.9	10.4	14.3	16.5	7,200

538376

This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.