


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT INVENTORY NUMBERING SYSTEM

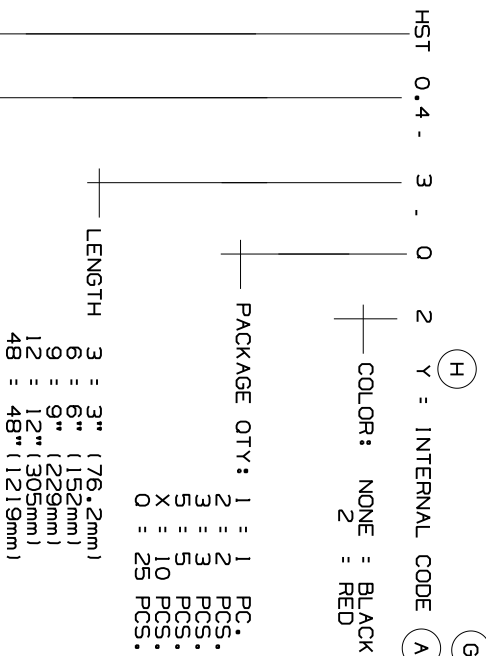

| PANDUIT PART NUMBER | Min. Exp. I.D In. (mm) | Max. Rec. I.D In. (mm) | NOMINAL REC WALL THICKNESS In. (mm) |
|---------------------|------------------------|------------------------|-------------------------------------|
| HST0.4-3-0-2(Y)     | 0.400<br>(10.2)        | 0.160<br>(4.1)         | 0.08<br>(2.0)                       |
| HST0.8-3-0-2(Y)     | 0.750<br>(19.1)        | 0.220<br>(5.6)         | 0.09<br>(2.3)                       |
| HST1.1-3-0-2(Y)     | 1.100<br>(27.9)        | 0.375<br>(9.5)         | 0.12<br>(3.0)                       |
| HST1.5-3-0-2(Y)     | 1.500<br>(38.1)        | 0.500<br>(12.7)        | 0.16<br>(4.1)                       |
| HST2.0-3-0-2(Y)     | 2.000<br>(50.8)        | 0.666<br>(16.9)        | 0.16<br>(4.1)                       |
| HST2.7-3-0-2(Y)     | 2.700<br>(68.6)        | 0.870<br>(22.1)        | 0.16<br>(4.1)                       |
| HST3.0-3-0-2(Y)     | 3.000<br>(76.2)        | 1.000<br>(25.4)        | 0.16<br>(4.1)                       |
| HST3.5-3-0-2(Y)     | 3.500<br>(88.9)        | 1.200<br>(30.5)        | 0.16<br>(4.1)                       |

EXPANDED INSIDE DIAMETER TUBING  
 THICK WALL, ADHESIVE LINED HEAT SHRINK TUBING.

NOTES:

- APPROXIMATE SHRINK RATIO: 3:1 (EXPANDED: RECOVERED ID)
- SHRINK RATIOS ARE APPROXIMATIONS; PLEASE REFER TO TABLE 1 FOR THE EXACT MINIMUM EXPANDED AND MAXIMUM RECOVERED I.D.'S.
- MATERIAL: CROSSLINKED POLYOLEFIN
- COLOR: BLACK AND RED
- "ALL WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. (USER IS RESPONSIBLE TO DETERMINE SUITABILITY OF PRODUCT FOR INTENDED USE.)"
- ALL PARTS ARE ROHS COMPLIANT

| REV | DATE     | BY  | CHK | DESCRIPTION  | ECN      | R | CUST | SUP |
|-----|----------|-----|-----|--|----------|---|------|-----|
| 3   | 2/25/11  | LEF |     | 1 ADDED NOTE #6<br>H CHANGED Y: FROM COMPLIANT TO INTERNAL CODE<br>G CHANGED I.D. FROM 10.1 TO 10.2 ON PART HST0.4<br>F PUT HST3.0 BACK ON DRAWING |          |   |      |     |
| 2   | 10/12/10 | LEF |     | ADDED Y: ROHS<br>CHANGED NOTE 1<br>ADDED LINES HST2.7 & 3.5<br>DIM. CHANGES<br>REMOVED HST 3.0 LINE  | GB0239KM | 2 | RAMI |     |

CAD FILENAME/LAYERS  
G03597HN\_DC\_GB0239KM/03

**PANDUIT** CORP. TINLEY PARK, ILLINOIS

HST THICK WALL ADHESIVE LINED HEAT SHRINK

DIMENSIONS IN BRACKETS ARE METRIC ( mm )

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:  
(.XX) ±0.05 (1.31 (.XXX) ±0.010 (0.251) (1.00) ±0.02 (0.51) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

SCALE NONE

DRAWING NO. GB0239KM

DWG SIZE A

DATE 10/12/10

CHK'D JVL

MAT'L: SEE NOTES