

Screw Connection Terminal Blocks




Standard Feed-Through Blocks

1492-J10

1492-J16

1492-J35

Dimensions are not intended to be used for manufacturing purposes.
Note: Height dimension is measured from top of rail to top of terminal block.

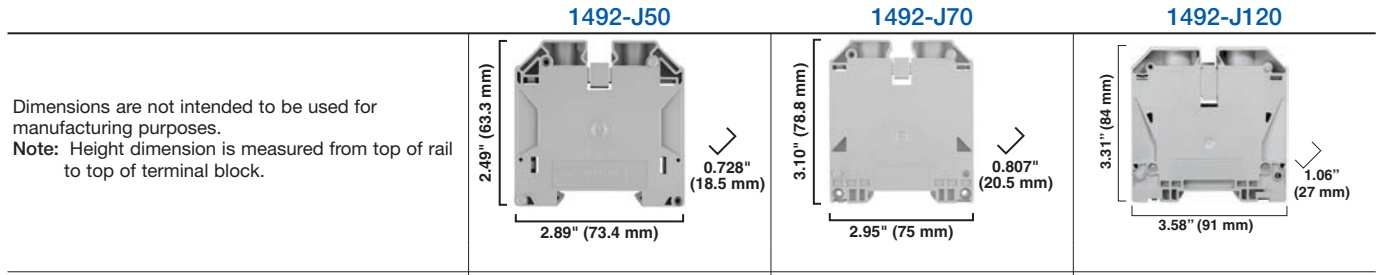


Specifications	Feed-through terminal block				Feed-through terminal block				Feed-through terminal block				
Certifications		CSA	IEC	ATEX		CSA	IEC	ATEX		CSA	IEC	ATEX	
Voltage Rating	600V AC/DC		1000V AC/DC	550V AC/DC	600V AC/DC		1000V AC/DC	690V AC/DC	1000V AC/DC		600V AC/DC	1000V AC/DC	690V AC/DC
Maximum Current	65 A	50 A	57 A	50 A	85 A	76 A	66 A	66 A	150 A	120 A	125 A	109 A	
Wire Range (Rated Cross Section)	#18...6 AWG		10 mm ²	10 mm ² (#16...8 AWG)	#18...4 AWG		16 mm ²	16 mm ² (#16...6 AWG)	#12...1/0 AWG	#12...2 AWG	35 mm ²	35 mm ² (#14...2 AWG)	
Wire Strip Length	0.47 in. (12 mm)				0.63 in. (16 mm)				0.70 in. (18 mm)				
Recommended Tightening Torque	20.4 lb•in (2.3 N•m)				35.0 lb•in (4.0 N•m)				51.0 lb•in (5.8 N•m)				
Density	30 pcs/ft (100 pcs/m)				25 pcs/ft (83 pcs/m)				19 pcs/ft (62 pcs/m)				
Housing Temperature Range	-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)				
Short-Circuit Current Rating	See page 12-42												

Terminal Blocks		Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.
Color:	Grey	1492-J10	50	1492-J16	50	1492-J35	40
	Red	1492-J10-RE	50	1492-J16-RE	50	—	—
	Blue	1492-J10-B	50	1492-J16-B	50	1492-J35-B	40
	Black	1492-J10-BL	50	1492-J16-BL	50	—	—
	Green	1492-J10-G	50	1492-J16-G	50	—	—
	Yellow	1492-J10-Y	50	1492-J16-Y	50	1492-J35-Y	40
	Orange	1492-J10-OR	50	1492-J16-OR	50	—	—
	Brown	1492-J10-BR	50	1492-J16-BR	50	—	—
	White	1492-J10-W	50	1492-J16-W	50	—	—
Accessories		Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.
Mounting Rails:							
1 m Symmetrical DIN (Steel)		199-DR1	10	199-DR1	10	199-DR1	10
1 m Symmetrical Heavy Duty DIN (Steel, unslotted)		199-DR4	5	199-DR4	5	199-DR4	5
1 m Symmetrical DIN (Aluminum)		1492-DR5	10	1492-DR5	10	1492-DR5	10
1 m Hi-Rise Sym. DIN (Aluminum)		1492-DR6	2	1492-DR6	2	1492-DR6	2
1 m Angled Hi-Rise Sym. DIN (Steel)		1492-DR7	2	1492-DR7	2	1492-DR7	2
1 m Symmetrical Heavy Duty DIN (Copper, unslotted)		1492-DR8	5	1492-DR8	5	1492-DR8	5
1 m Symmetrical Heavy Duty DIN (Steel)		1492-DR9	5	1492-DR9	5	1492-DR9	5
End Barriers	Grey	1492-EBJ3	50	1492-EBJ16	20	1492-EBJ16	20
	Blue	1492-EBJ3-B	50	1492-EBJ16-B	20	1492-EBJ16-B	20
	Yellow	1492-EBJ3-Y	50	1492-EBJ16-Y	20	1492-EBJ16-Y	20
End Anchors and Retainers:							
DIN Rail — Normal Duty		1492-EAJ35	100	—	—	—	—
DIN Rail — Heavy Duty		1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50
Screwless End Retainer		1492-ERL35	20	—	—	—	—
Jumpers:							
Screw Center Jumper — 10-pole		1492-CJJ10-10	20	1492-CJJ12-10	10	1492-CJJ16-10	10
Screw Center Jumper — 4-pole		1492-CJJ10-4	50	1492-CJJ12-4	20	1492-CJJ16-4	20
Screw Center Jumper — 3-pole		1492-CJJ10-3	50	1492-CJJ12-3	20	1492-CJJ16-3	20
Screw Center Jumper — 2-pole		1492-CJJ10-2	50	1492-CJJ12-2	20	1492-CJJ16-2	20
Screw Type Jumper Notching Tool		1492-T1	1	1492-T1	1	1492-T1	1
Other Accessories:							
Partition Plate		1492-EBJ16	20	1492-PPJD3	20	1492-PPJD3	20
Test Plug Socket		1492-TPS23L	50	1492-TPS4L	50	1492-TPS4L	50
Test Plug		1492-TP23	20	1492-TP40	20	1492-TP40	20
Electrical Warning Plate		1492-EWPJ8	50	1492-EWPJ12	50	1492-EWPJ12	50
Marking Systems:							
Snap-in marker cards		1492-M7X12 (108/card)	5	1492-M7X12 (108/card)	5	1492-M7X12 (108/card)	5
Snap-in marker cards		1492-M5X5 (200/card)	5	1492-M5X5 (200 card)	5	1492-M5X5 (200/card)	5

Screw Connection Terminal Blocks

Standard Feed-Through Blocks









Dimensions are not intended to be used for manufacturing purposes.
Note: Height dimension is measured from top of rail to top of terminal block.

Specifications	Feed-through terminal block				Feed-through terminal block				Feed-through terminal block			
	UL	CSA	IEC	ATEX	UL	CSA	IEC	ATEX	UL	CSA	IEC	
Certifications	1000V AC/DC	600V AC/DC	1000V AC/DC	690V AC/DC	600V AC/DC	1000V AC/DC	690V AC/DC	1000V AC/DC	1000V AC/DC			
Voltage Rating	150 A	150 A	126 A	175 A	205 A	192 A	167 A	228 A	220 A	269 A		
Maximum Current	#10... 1/0 AWG	#8... 1/0 AWG	50 mm ²	#10... 1/0 AWG 50 mm ²	#6...2/0 AWG	70 mm ²	#8... 2/0 AWG 70 mm ²	#4... 250 MCM AWG	#4... 4/0 AWG	16... 120 mm ²		
Wire Range (Rated Cross Section)	0.94 in. (24 mm)				0.87 in. (22 mm)				1.06 in. (27 mm)			
Wire Strip Length	31.5 lb•in (3.6 N•m)				87.0 lb•in (9.8 N•m)				141.6 lb•in (16.0 N•m)			
Recommended Tightening Torque	16 pcs/ft (54 pcs/m)				14 pcs/ft (48 pcs/m)				11 pcs/ft (37 pcs/m)			
Density	-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)			
Housing Temperature Range	See page 12-42											
Short-Circuit Current Rating	Terminal Blocks		Cat. No.	Pkg Qty.	Terminal Blocks		Cat. No.	Pkg Qty.	Terminal Blocks		Cat. No.	Pkg Qty.
	Color:	Grey	1492-J50	10	1492-J70	10	1492-J120	5	1492-J120	5		
		Blue	1492-J50-B	10	1492-J120-B	5	1492-J120-B	5				
	Accessories		Cat. No.	Pkg Qty.	Accessories		Cat. No.	Pkg Qty.	Accessories		Cat. No.	Pkg Qty.
	Mounting Rails:											
	1 m Symmetrical DIN (Steel)		199-DR1	10	199-DR1	10	—	—				
	1 m Symmetrical Heavy Duty DIN (Steel, Unslotted)		199-DR4	5	199-DR4	5	199-DR4	5				
	1 m Symmetrical DIN (Aluminum)		1492-DR5	10	1492-DR5	10	—	—				
	1 m Hi-Rise Sym. DIN (Aluminum)		1492-DR6	2	1492-DR6	2	—	—				
	1 m Angled Hi-Rise Sym. DIN (Steel)		1492-DR7	2	1492-DR7	2	—	—				
	1 m Symmetrical Heavy Duty DIN (Copper, Unslotted)		1492-DR8	5	1492-DR8	5	1492-DR8	5				
	1 m Symmetrical Heavy Duty DIN (Steel)		1492-DR9	5	1492-DR9	5	1492-DR9	5				
	End Barriers		Not Required	—	Not Required	—	Not Required	—				
	End Anchors:											
	DIN Rail — Heavy Duty		1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50				
	Jumpers:											
	Screw Center Jumper — 4-pole		1492-CJJ18-4	10	1492-CJJ20-4	5	1492-CJJ27-4	5				
	Screw Center Jumper — 3-pole		1492-CJJ18-3	10	1492-CJJ20-3	5	1492-CJJ27-3	5				
	Screw Center Jumper — 2-pole		1492-CJJ18-2	10	1492-CJJ20-2	5	1492-CJJ27-2	5				
	Other Accessories:											
	Control Circuit Tap*		1492-J50A	5	1492-J70A	5	1492-J120A	5				
	Electrical Warning Plate		1492-EWPJ18	50	1492-EWPJ18	50	—	—				
	Marking Systems:											
	Snap-in marker cards		1492-M7X12 (108/card)	5	1492-M7X12 (108/card)	5	1492-MR8X12 (84/card)	5				
	Snap-in marker cards		1492-M5X5 (200/card)	5	1492-M5X5 (200/card)	5	1492-M7X12 (108/card)	5				

* Auxiliary connection, allowing a single additional #26...8 AWG wire connection.

Screw Connection Terminal Blocks

Grounding Blocks

	1492-JG16				1492-JG35				1492-JG50			
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.												
	Specifications	Feed-through grounding terminal block				Feed-through grounding terminal block				Feed-through grounding terminal block		
Certifications		CSA	IEC	ATEX		CSA	IEC	ATEX		CSA	IEC	ATEX
Voltage Rating	—	—	—	—	—	—	—	—	—	—	—	—
Maximum Current	Grounding				Grounding				Grounding			
Wire Range (Rated Cross Section)	#24...4 AWG	16 mm ²	16 mm ² (#16...6 AWG)		#12...1 AWG	#12...2 AWG	35 mm ²	35 mm ² (#14...2 AWG)	#10...1/0 AWG	#14...1/0 AWG	50 mm ²	50 mm ² (10...1/0 AWG)
Wire Strip Length	0.63 in. (16 mm)				0.70 in. (18 mm)				0.94 in. (24 mm)			
Recommended Tightening Torque	35.0 lb•in (4.0 N•m)				51.0 lb•in (5.8 N•m)				31.5 lb•in (3.6 N•m)			
Mounting Torque — Center Screw	10.6...21.2 lb•in (1.2...2.4 N•m)				10.6...21.2 lb•in (1.2...2.4 N•m)				17.7...35.4 lb•in (2.0...4.0 N•m)			
Density	25 pcs/ft (83 pcs/m)				19 pcs/ft (62 pcs/m)				16 pcs/ft (54 pcs/m)			
Housing Temperature Range	-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)			
Short-Circuit Current Rating	See page 12-42											
Terminal Blocks	Cat. No.	Pkg Qty.			Cat. No.	Pkg Qty.			Cat. No.	Pkg Qty.		
Color: Green/Yellow	1492-JG16	50			1492-JG35	25			1492-JG50	10		
Accessories	Cat. No.	Pkg Qty.			Cat. No.	Pkg Qty.			Cat. No.	Pkg Qty.		
Mounting Rails: 1 m Symmetrical DIN (Steel)	199-DR1	10			—	—			—	—		
1 m Symmetrical Heavy Duty DIN (Steel, Unslotted)	199-DR4	5			199-DR4	5			199-DR4	5		
1 m Symmetrical DIN (Aluminum)	1492-DR5	10			1492-DR5	10			—	—		
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6	2			1492-DR6	2			—	—		
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7	2			—	—			—	—		
1 m Symmetrical Heavy Duty DIN (Copper, Unslotted)	1492-DR8	5			1492-DR8	5			1492-DR8	5		
1 m Symmetrical Heavy Duty DIN (Steel)	1492-DR9	5			1492-DR9	5			1492-DR9	5		
End Barrier	Not Required	—			Not Required	—			Not Required	—		
End Anchors: DIN Rail — Heavy Duty	1492-EAHJ35	50			1492-EAHJ35	50			1492-EAHJ35	50		
Marking Systems: Snap-in marker cards	1492-M7X12 (108/card)	5			1492-M7X12 (108/card)	5			1492-M7X12 (108/card)	5		
Snap-in marker cards	1492-M8X5 (160/card)	5			1492-M8X5 (160/card)	5			1492-M8X5 (160/card)	5		


Screw Connection Terminal Blocks

Space-Saver Grounding Blocks

1492-WG16S

Dimensions are not intended to be used for manufacturing purposes.

Note: Height dimension is measured from top of rail to top of terminal block.



Specifications	Single-circuit grounding terminal block.		
Certifications	UL	CSA	IEC
Voltage Rating	—	—	—
Maximum Current	Grounding		
Wire Range (Rated Cross Section)	#14...4 AWG		2.5...16 mm ²
Wire Strip Length	0.51 in. (13 mm)		
Recommended Tightening Torque	18...20 lb•in (2.1 N•m)		
Center Screw Mounting Torque	10.6 lb•in (1.2 N•m)		
Density	27 pcs/ft (90 pcs/m)		
Housing Temperature Range	-40...+195 °F (-40...+90 °C)		
Terminal Blocks	Cat. No.	Pkg Qty.	
Color: Green/Yellow	1492-WG16S	25	
Accessories	Cat. No.	Pkg Qty.	
Mounting Rails:			
1 m Symmetrical DIN (Steel)	199-DR1	10	
1 m Symmetrical DIN (Aluminum)	1492-DR5	10	
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6	2	
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7	2	
1 m Symmetrical DIN (Copper)	1492-DR8	5	
1 m Symmetrical DIN (Steel)	1492-DR9	5	
End Barrier	Not Required	—	
End Anchors:			
DIN Rail — Normal Duty	1492-EAJ35	100	
DIN Rail — Heavy Duty	1492-EAHJ35	50	
Marking Systems:			
Snap-in Marker Card	1492-MS6X12 (80/card)	5	

Spring-Clamp Connection Terminal Blocks

Standard Feed-Through Blocks

	1492-L16			1492-L16D*			1492-L35					
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.												
	Specifications	Feed-through terminal block			Power distribution block with center jumper connection/feed			Feed-through terminal block				
Certifications												
Voltage Rating	600V AC/DC			800V AC/DC	550V AC/DC	600V AC/DC			800V AC/DC	690V AC/DC		
Maximum Current	65 A			76 A	66 A	65 A			76 A	120 A	125 A	109 A
Wire Range (Rated Cross Section)	#14...4 AWG			16 mm ²	16 mm ² (16...6 AWG)	#14...4 AWG			16 mm ²	#12...2 AWG	35 mm ²	35 mm ² (14...2 AWG)
Wire Strip Length	0.70 in. (18 mm)			0.70 in. (18 mm)			0.98 in. (25 mm)					
Density	25 pcs/ft (82 pcs/m)			20 pcs/ft (66 pcs/m)			18 pcs/ft (62 pcs/m)					
Housing Temperature Range	-58...+248 °F (-50...+120 °C)			-58...+248 °F (-50...+120 °C)			-58...+248 °F (-50...+120 °C)					
Short-Circuit Current Rating	See page 12-78											
Terminal Blocks		Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	
Color	Grey	1492-L16	25	1492-L16D*	20	1492-L35	10	1492-L35	10	1492-L35-RE	10	
	Red	1492-L16-RE	25	—	—	1492-L35-RE	10	—	—	1492-L35-B	10	
	Blue	1492-L16-B	25	—	—	1492-L35-B	10	—	—	1492-L35-BL	10	
	Black	1492-L16-BL	25	—	—	1492-L35-BL	10	—	—	1492-L35-G	10	
	Green	1492-L16-G	25	—	—	1492-L35-G	10	—	—	1492-L35-Y	10	
	Yellow	1492-L16-Y	25	—	—	1492-L35-Y	10	—	—	1492-L35-OR	10	
	Orange	1492-L16-OR	25	—	—	1492-L35-OR	10	—	—	1492-L35-BR	10	
	Brown	1492-L16-BR	25	—	—	1492-L35-BR	10	—	—	1492-L35-W	10	
	White	1492-L16-W	25	—	—	1492-L35-W	10	—	—			
Accessories		Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	
Mounting Rails												
1 m Symmetrical DIN (Steel)		199-DR1	10	199-DR1	10	199-DR1	10	199-DR1	10	199-DR1	10	
1 m Symmetrical Heavy Duty DIN (Steel, Unslotted)		199-DR4	5	199-DR4	5	199-DR4	5	199-DR4	5	199-DR4	5	
1 m Symmetrical DIN (Aluminum)		1492-DR5	10	1492-DR5	10	1492-DR5	10	1492-DR5	10	1492-DR5	10	
1 m Hi-Rise Symmetrical DIN (Aluminum)		1492-DR6	2	1492-DR6	2	1492-DR6	2	1492-DR6	2	1492-DR6	2	
1 m Angled Hi-Rise Sym. DIN (Steel)		1492-DR7	2	1492-DR7	2	1492-DR7	2	1492-DR7	2	1492-DR7	2	
1 m Symmetrical Heavy Duty DIN (Copper, Unslotted)		1492-DR8	5	1492-DR8	5	1492-DR8	5	1492-DR8	5	1492-DR8	5	
1 m Symmetrical Heavy Duty DIN (Steel Slotted)		1492-DR9	5	1492-DR9	5	1492-DR9	5	1492-DR9	5	1492-DR9	5	
End Barriers	Grey	1492-EBL16	20	Integrated to Block	—	Integrated to Block	—	Integrated to Block	—	Integrated to Block	—	
	Blue	1492-EBL16-B	20	—	—	—	—	—	—	—	—	
	Yellow	1492-EBL16-Y	20	—	—	—	—	—	—	—	—	
End Anchors and Retainers												
Screwless End Retainer		1492-ERL35	20	1492-ERL35	20	1492-ERL35	20	1492-ERL35	20	1492-ERL35	20	
DIN Rail — Normal Duty		1492-EAJ35	100	1492-EAJ35	100	1492-EAJ35	100	1492-EAJ35	100	1492-EAJ35	100	
DIN Rail — Heavy Duty		1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50	
Jumpers												
Plug-in Center Jumper — 2-Pole		1492-CJL12-2	25	⚡	—	1492-CJL16-2	10	1492-CJL16-2	10	1492-CJL16-2	10	
Other Accessories												
Test Plug		1492-TP23	20	1492-TP23	20	1492-TP23	20	1492-TP23	20	1492-TP23	20	
Test Adapter		—	—	—	—	—	—	—	—	—	—	
Electrical Warning Plate		1492-EWPL12	20	1492-EWPL12	20	1492-EWPL16	20	1492-EWPL16	20	1492-EWPL16	20	
Marking Systems												
Snap-In Marker Cards‡		1492-M7X12 (108/card)	5	1492-M7X12 (108/card)	5	1492-M7X12 (108/card)	5	1492-M7X12 (108/card)	5	1492-M7X12 (108/card)	5	
Snap-In Marker Cards		1492-M8X5 (160/card)	5	1492-M8X5 (160/card)	5	1492-M8X5 (160/card)	5	1492-M8X5 (160/card)	5	1492-M8X5 (160/card)	5	
Hinged Marker Cards		1492-MH5X15 (96/card)	5	1492-MH5X15 (96/card)	5	1492-MH5X15 (96/card)	5	1492-MH5X15 (96/card)	5	1492-MH5X15 (96/card)	5	

* Can be electrically connected through center jumper for power distribution to 1492 - L3, L3Q, L4, L4T, L4Q, L6, and L6T terminal blocks. See page 12-55 for distribution guidelines.

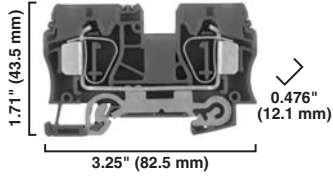
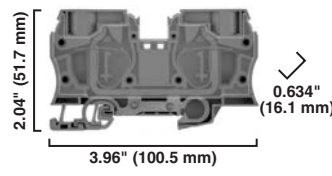
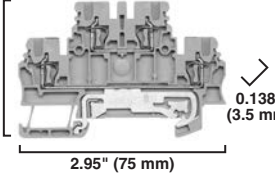



⚡ Use defined center jumper for standard terminal blocks when connecting for power distribution.

‡ May only be mounted in terminal block corner marking positions.




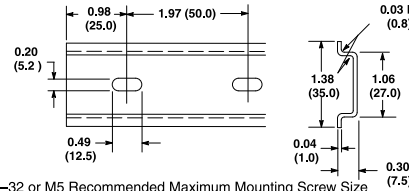

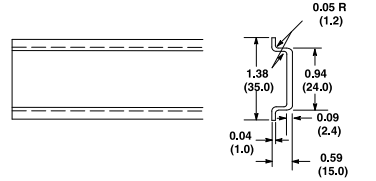

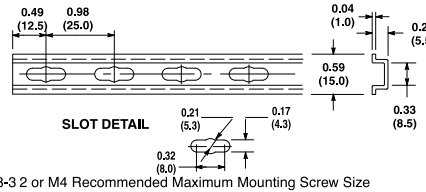

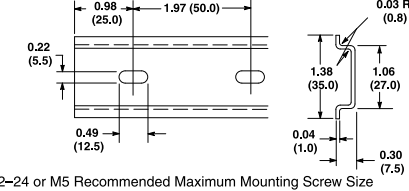

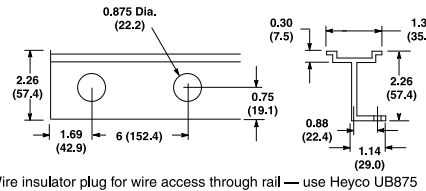

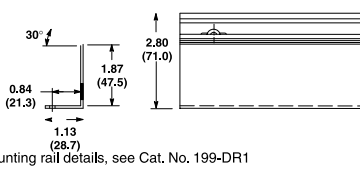

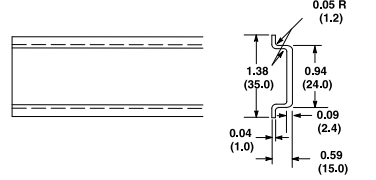

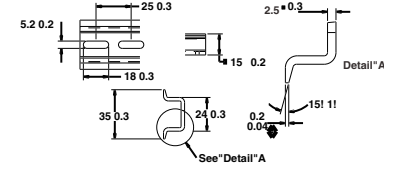
Spring-Clamp Connection Terminal Blocks

Grounding Blocks

	1492-LG16				1492-LG35				1492-LDG2		
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.											
Specifications	Feed-through grounding terminal block				Feed-through grounding terminal block				Two-circuit terminal block with 1 feed-through and 1 ground circuit		
Certifications		CSA	IEC	ATEX		CSA	IEC	ATEX		CSA	IEC
Voltage Rating	—				—				300V AC/DC		500V AC/DC
Maximum Current	Grounding				Grounding				10 A	17.5 A	
Wire Range (Rated Cross Section)	#14...6 AWG	#14...4 AWG	16 mm ²	16 mm ² (16...6 AWG)	#12...2 AWG	35 mm ²	35 mm ² (#14...2 AWG)		#28...16 AWG	1.5 mm ²	
Wire Strip Length	0.70 in. (18 mm)				0.98 in. (25 mm)				0.31 in. (8 mm)		
Density	25 pcs/ft (82 pcs/m)				18 pcs/ft (62 pcs/m)				87 pcs/ft (285 pcs/m)		
Housing Temperature Range	-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)				-58...+248 °F (-50...+120 °C)		
Terminal Blocks	Cat. No.		Pkg Qty.		Cat. No.		Pkg Qty.		Cat. No.		Pkg Qty.
Color: Green/Yellow	1492-LG16		25		1492-LG35		10		—		—
Grey	—		—		—		—		1492-LDG2		50
Accessories	Cat. No.		Pkg Qty.		Cat. No.		Pkg Qty.		Cat. No.		Pkg Qty.
Mounting Rails:											
1 m Symmetrical DIN (Steel)	199-DR1		10		199-DR1		10		199-DR1		10
1 m Symmetrical Heavy Duty DIN (Steel, Unslotted)	199-DR4		5		199-DR4		5		199-DR4		5
1 m Symmetrical DIN (Aluminum)	1492-DR5		10		1492-DR5		10		1492-DR5		10
1 m Hi-Rise Symmetrical DIN (Aluminum)	1492-DR6		2		1492-DR6		2		1492-DR6		2
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7		2		1492-DR7		2		1492-DR7		2
1 m Symmetrical Heavy Duty DIN (Copper, Unslotted)	1492-DR8		5		1492-DR8		5		1492-DR8		5
1 m Symmetrical Heavy Duty DIN (Steel)	1492-DR9		5		1492-DR9		5		1492-DR9		5
End Barrier Yellow	1492-EBL16-Y		20		Integrated		—		—		—
Grey	—		—		—		—		1492-EBLD2		50
End Anchors and Retainers	1492-ERL35		20		1492-ERL35		20		1492-ERL35		20
Screwless End Retainer	1492-EAJ35		100		1492-EAJ35		100		1492-EAJ35		100
DIN Rail — Normal Duty	1492-EAHJ35		50		1492-EAHJ35		50		1492-EAHJ35		50
DIN Rail — Heavy Duty											
Other Accessories:											
Reducing Sleeves 26...24 AWG (0.13...0.2 mm ²) White	—		—		—		—		1492-PSL2-2		100
Reducing Sleeves 22...20 AWG (0.25...0.5 mm ²) Grey	—		—		—		—		1492-PSL2-5		100
Test Plug	1492-TP23		20		1492-TP23		20		1492-TPL4		25
Electrical Warning Plate	—		—		—		—		1492-EWPL4		20
Marking Systems:											
Snap-In Marker Cards*	1492-M7X12 (108/card)		5		1492-M7X12 (108/card)		5		1492-M3X12 (120/card)		5
Snap-In Marker Cards	1492-M8X5 (160/card)		5		1492-M8X5 (160/card)		5		1492-M3X5 (100/card)		5
Hinged Marker Cards	1492-MH5X15 (96/card)		5		1492-MH5X10 (96/card)		—		—		—

* May only be mounted in terminal block corner marking positions.

Mounting rails allow many blocks to be fastened in a panel with only a few screws to anchor the rail to the panel. Mounting rails allow easy installation and removal of a block in a row.

Cat. No.	Description	Pkg Qty.	Dimensions*
 199-DR1	Symmetrical Rail 35 mm x 7.5 mm 3.28 ft (1 m) long Zinc-Plated Clear Chromated Steel EN60715 DIN #3	10	 #10-32 or M5 Recommended Maximum Mounting Screw Size
199-DR2	Same as Cat. No. 199-DR1, but length = 2 m	20	
 199-DR4	Heavy Duty Symmetrical Rail 35 mm x 15 mm 3.28 ft (1 m) long Zinc-Plated Clear Chromated Steel EN60715 DIN #3	5	
 1492-DR3	Mini 15 mm x 5.5 mm Rail 3.28 ft (1 m) long Zinc-Plated Clear Chromated Steel EN60715 DIN #2	5	 #8-32 or M4 Recommended Maximum Mounting Screw Size
 1492-DR5	Symmetrical Rail 35 mm x 7.5 mm 3.28 ft (1 m) long Copper-Free Aluminum EN60715 For Bul. 1492 Terminal Blocks Only DIN #3	10	 #12-24 or M5 Recommended Maximum Mounting Screw Size
 1492-DR6	Symmetrical Rail 35 mm x 7.5 mm 2.26 in. (57.4 mm) high 3.28 ft (1 m) long Copper-Free Aluminum For Bul. 1492 Terminal Blocks Only DIN #3	2	 Wire insulator plug for wire access through rail — use Heyco UB875
 1492-DR7	Symmetrical Rail 35 mm x 7.5 mm 2.80 in. (71.0 mm) high 3.28 ft (1 m) long Angled 30° Zinc-Plated, Chromated Steel DIN #3	2	 For mounting rail details, see Cat. No. 199-DR1
 1492-DR8	Symmetrical Rail 35 mm x 15 mm 3.28 ft (1 m) long Copper EN60715 DIN #3	5	
 1492-DR9	Symmetrical Rail 35 mm x 15 mm 3.28 ft (1 m) long Zinc-Plated Clear Chromated Steel EN60715 DIN #3	5	

* Dimensions shown in inches (millimeters). Dimensions are not intended to be used for manufacturing purposes.

⊛ 0.218 x 0.50 in. (5.5 x 12.7 mm) slotted mounting holes every 3 in. (76.2 mm) starting 1.69 in. (42.9 mm) from end.






‡ Dimensions in millimeters.

End Barriers, continued

Dimensions Width x Length x Height	For Use With	Color	Pkg Qty.	Cat. No.	
0.20 x 0.94 x 1.31 in. (5.1 x 23.8 x 33.3 mm)	1492-LMP3, LMP3Q	Grey	50	1492-EBLMP3	
		Blue	50	1492-EBLMP3-B	
0.20 x 0.94 x 1.31 in. (5.1 x 23.8 x 33.3 mm)	1492-LM3, LM3Q, LMG3, LMP3E, LMP3QE	Grey	50	1492-EBLM3	
		Blue	50	1492-EBLM3-B	
		Yellow	50	1492-EBLM3-Y	
0.06 x 0.97 x 1.38 in. (1.5 x 24.65 x 35 mm)	1492-LMJ3, LMJG3	Grey	50	1492-EBLMJ3	
		Blue	50	1492-EBLMJ3-B	
		Yellow	50	1492-EBLMJ3-Y	
0.06 x 2.32 x 4.35 in. (1.5 x 59 x 110.5 mm)	1492-LTF3	Grey	20	1492-EBLTF3	
0.06 x 2.69 x 1.77 in. (5 x 68.5 x 45 mm)	1492-LS2-3, LS2-3L, LSG2-3		50	1492-EBLS2-3	
0.20 x 3.2 x 1.77 in. (5 x 81.5 x 45 mm)	1492-LS2-4, LS2-4L, LSG2-4		50	1492-EBLS2-4	
0.06 x 1.81 x 3.74 in. (1.5 x 46 x 95 mm)	1492-LDAG3, LDG3P		20	1492-EBLDAG3	
0.10 x 1.04 x 1.81 in. (2.5 x 26.4 x 46 mm)	1492-LC3		20	1492-EBLC3	
0.10 x 1.65 x 2.72 in. (2.5 x 41.85 x 69 mm)	1492-LDC3		20	1492-EBLDC3	
—	1492-LDG3ND, LD3N, LDG3N		Grey	20	1492-BSPJLD3N
—	1492-LDG3ND, LD3N, LDG3N		Blue	20	1492- BSPJLD3N-B

End Anchor/End Retainers

End anchors and end retainers mount at both ends of a group of terminal blocks to add rigidity to the terminal assembly and prevent sliding along the rails.

Photo	Dimensions Width x Length x Height	Tightening Torque	Markers	For Use With	Color	Pkg Qty.	Cat. No.
	0.31 x 2.20 x 1.85 in. (8 x 56 x 47 mm)	4.4 lb•in (0.5 N•m)	1492-M7X12 1492-M8X5	199-DR1, 199-DR2, 1492-DR4, 1492-DR5, 1492-DR6, 1492-DR7, 1492-DR8, 1492-DR9	Grey	100	1492-EAJ35
	0.48 x 2.20 x 2.48 in. (12.2 x 56 x 63 mm)	4.4 lb•in. (0.5 N•m)	1492-M7X12 1492-M5X5	199-DR1, 199-DR2, 1492-DR4, 1492-DR5, 1492-DR6, 1492-DR7, 1492-DR8, 1492-DR9	Grey	50	1492-EAHJ35
	0.31 x 1.06 x 1.06 in. (8 x 27 x 27 mm)	3.5 lb•in. (0.9 N•m)	1492-M5X5	1492-DR3	Grey	50	1492-EAJ15
	0.24 x 2.19 x 1.63 in. (6 x 55.6 x 41.5 mm)	—	1492-M5X10 1492-M5X5	199-DR1, 199-DR2, 1492-DR4, 1492-DR5, 1492-DR6, 1492-DR7, 1492-DR8, 1492-DR9	Grey	20	1492-ERL35
	0.20 x 0.96 x 0.75 in. (5 x 24.5 x 19 mm)	—	1492-M5X10 1492-M5X5	1492-DR3	Grey	20	1492-ERL15