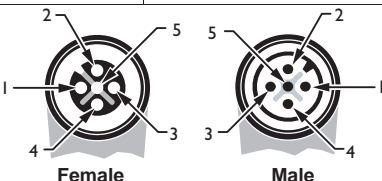


Connection Systems  
**Cordsets and Patchcords, DC Micro Style**  
 18 and 22 AWG, Yellow, Black, or Blue PVC

**Pinout and Color Code**

Color Code	Face View Pinout							
	2-Pin		3-Pin		4-Pin		5-Pin	
								
A	1 NA 2 NA 3 Brown	4 Blue 5 NA	1 Brown 2 NA 3 Blue	4 Black 5 NA	1 Brown 2 White 3 Blue	4 Black 5 NA	1 Brown 2 White 3 Blue	4 Black 5 Grey
B	1 Brown 2 NA 3 NA	4 Blue 5 NA	—		—		—	

**Product Selection**

**Cordsets** 

Pin Count	Color Code	Jacket Color	Wire Gauge	Cat. No.			
				Straight Female	Right Angle Female	Straight Male	Right Angle Male
2-Pin	A	Yellow	22 AWG	889D-F2AC-*	889D-R2AC-*	889D-M2AC-*	889D-E2AC-*
	B	Black		889D-F2BC-Q†	889D-R2BC-Q†	—	—
3-Pin	A	Yellow		889D-F3AC-*	889D-R3AC-*	889D-M3AC-*	889D-E3AC-*
	A	Yellow		889D-F4AC-*	889D-R4AC-*	889D-M4AC-*	889D-E4AC-*
4-Pin	A	Yellow	18 AWG	889D-F4AE-*	889D-R4AE-*	889D-M4AE-*	889D-E4AE-*
	A	Black	22 AWG	889D-F4BC-*	889D-R4BC-*	889D-M4BC-*	889D-E4BC-*
	A	Blue		889D-F4LC-*	889D-R4LC-*	889D-M4LC-*	889D-E4LC-*
5-Pin	A	Yellow	22 AWG	889D-F5AC-*	889D-R5AC-*	889D-M5AC-*	889D-E5AC-*
	A	Black		889D-F5BC-*	889D-R5BC-*	889D-M5BC-*	889D-E5BC-*

**Patchcords** 

Pin Count	Color Code	Jacket Color	Wire Gauge	Cat. No.			
				Straight Female Straight Male	Straight Female Right Angle Male	Right Angle Female Straight Male	Right Angle Female Right Angle Male
2-Pin	A	Yellow	22 AWG	889D-F2ACDM-‡	889D-F2ACDE-‡	889D-R2ACDM-‡	889D-R2ACDE-‡
	B	Black	22 AWG	889D-F2BCDM-Q‡	889D-F2BCDE-Q‡	889D-R2BCDM-Q‡	889D-R2BCDE-Q‡
3-Pin	A	Yellow	22 AWG	889D-F3ACDM-‡	889D-F3ACDE-‡	889D-R3ACDM-‡	889D-R3ACDE-‡
4-Pin	A	Yellow	22 AWG	889D-F4ACDM-‡	889D-F4ACDE-‡	889D-R4ACDM-‡	889D-R4ACDE-‡
	A★	Yellow	22 AWG	889D-F4ACDM-V‡	889D-F4ACDE-V‡	889D-R4ACDM-V‡	889D-R4ACDE-V‡
	A	Yellow	18 AWG	889D-F4AEDM-‡	889D-F4AEDE-‡	889D-R4AEDM-‡	889D-R4AEDE-‡
	A	Black	22 AWG	889D-F4BCDM-‡	889D-F4BCDE-‡	889D-R4BCDM-‡	889D-R4BCDE-‡
5-Pin	A	Blue	22 AWG	889D-F4LCDM-‡	889D-F4LCDE-‡	889D-R4LCDM-‡	889D-R4LCDE-‡
	A	Yellow	22 AWG	889D-F5ACDM-‡	889D-F5ACDE-‡	889D-R5ACDM-‡	889D-R5ACDE-‡
	A	Yellow	22 AWG	889D-F5BCDM-‡	889D-F5BCDE-‡	889D-R5BCDM-‡	889D-R5BCDE-‡

\* Replace symbol with 2 (2 m), 5 (5 m) or 10 (10 m) for standard cable lengths.  
 ‡ Replace symbol with 0M3 (1 ft), 1 (1 m), 2 (2 m), 5 (5 m) or 10 (10 m) for standard lengths.  
 ★ See Wiring Diagrams.

**Note:** Stainless steel connectors may be ordered by adding an "S" to the bulletin number (e.g. 889DS-F4AC-\*)