


Specifications	Color Code	Put-Ups
<b>Conductor</b> - Stranded Bare Copper <b>Insulation</b> 16 AWG - .025" (.635mm) PE 14 AWG - .025" (.635mm) PE 12 AWG - .030" (.762mm) PE	<b>Jacket</b> - PE <b>Voltage Rating</b> - 600 V <b>Temp. Rating</b> - 75°C  Per Specification, See Color Code Tables on Page 15.	Standard Reels 2,500' and 5,000' <i>Other lengths available. Please                      consult your factory representa-                      tive for availability.</i>

PART NO.	NO. OF COND	OUTER JKT THICKNESS		NOMINAL O.D.		WEIGHT lbs. / 1M'
		INCH	mm	INCH	mm	
<b>16 AWG</b>						
8362	2	.045	1.143	.322	8.18	58
8363	3	.045	1.143	.339	8.61	75
8364	4	.045	1.143	.369	9.37	94
8365	5	.045	1.143	.402	10.21	113
8367	7	.045	1.143	.435	11.05	146
8369	9	.060	1.524	.538	13.67	186
83610	10	.060	1.524	.580	14.73	220
83612	12	.060	1.524	.597	15.16	254
83616	16	.060	1.524	.660	16.76	325
83620	20	.060	1.524	.737	18.72	395
<b>14 AWG</b>						
8302	2	.045	1.143	.322	8.18	58
8303	3	.045	1.143	.339	8.61	75
8304	4	.045	1.143	.369	9.37	94
8305	5	.045	1.143	.402	10.21	113
8307	7	.045	1.143	.435	11.05	146
8309	9	.060	1.524	.538	13.67	186
8310	10	.060	1.524	.580	14.73	220
8312	12	.060	1.524	.597	15.16	254
8314	14	.060	1.524	.626	15.90	325
8315	15	.060	1.524	.660	16.76	311
8316	16	.060	1.524	.660	16.76	325
8319	19	.060	1.524	.694	17.63	375
8320	20	.060	1.524	.729	18.52	395
8321	21	.060	1.524	.729	18.52	413
8325	25	.060	1.524	.808	20.52	478
8326	26	.060	1.524	.808	20.52	501
<b>12 AWG</b>						
8702	2	.045	1.143	.376	9.55	58
8703	3	.045	1.143	.397	10.08	75
8704	4	.045	1.143	.434	11.02	94
8705	5	.045	1.143	.475	12.07	113
8707	7	.045	1.143	.514	13.06	146
8709	9	.060	1.524	.634	16.10	186
8710	10	.060	1.524	.688	17.48	220
8712	12	.060	1.524	.709	18.01	254
8716	16	.060	1.524	.787	19.99	325
8719	19	.060	1.524	.829	21.06	395
8720	20	.080	2.03	.913	23.19	631
8721	21	.080	2.03	.913	23.19	652
8725	25	.080	2.03	1.010	25.65	760

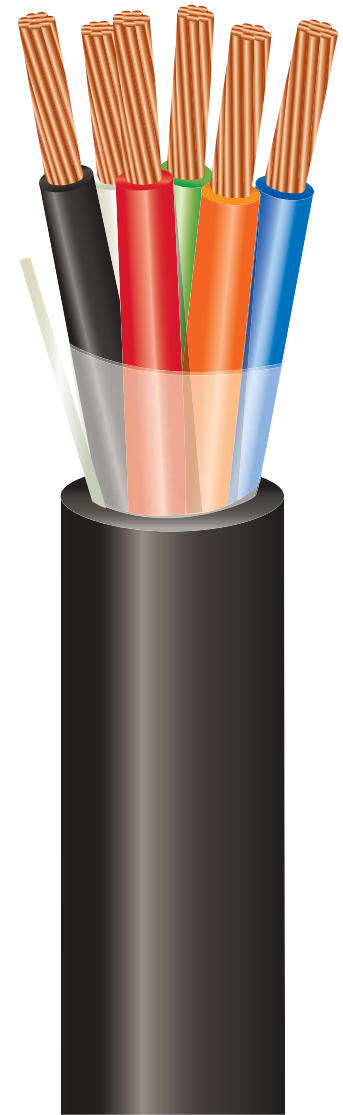

### Cable Identification

Indent print on jacket  
 "ADVANCED DIGITAL CABLE,  
 INC. IMSA 20-1 YYYY\* 600V"  
*\*replace YYYY with year of manufacturer*

Inkjet print on reverse side of  
 jacket with footage markers.

The information contained on this specification is intended to be used as a guide in product selection and is believed to be reliable. ADC has made every effort to ensure the data shown above is accurate at the time of publication. This specification is subject to change anytime without notice.