

GFS-1 Factory Sealed Ground Fault Circuit Interrupter

For U-Line® Contender® 20 Amp Receptacles. Explosionproof, Dust-Ignitionproof

125 Vac Branch Circuits. Installs in Standard Contender Series Mounting Box.

Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 3RX, 7CD, 9EFG

Applications

- Provides required ground fault protection for portable electrically-operated devices. Meets all UL and CSA requirements for ground fault protection in hazardous locations.
- Well suited for use in highly corrosive atmospheres and wet locations.
- Can be used in conjunction with U-Line factory sealed Contender receptacle on 20 Amp, 125 Vac branch circuits.

Features


- Covers are UL Listed when used with Contender® Series back boxes.
- Factory sealed construction; no external seals are required. Arcing is confined within the device's interior sealed chamber.
- Rated 20 Amp, 125 Vac, 5 mA trip setting.
- Smooth-operating test and reset buttons.

Standard Materials

- Cover and sealing chamber cast copperfree (less than 4/10 of 1%) aluminum
- Cover bolts, test and reset buttons and shafts: stainless steel


Certifications and Compliances

- UL Listed: E81751
- UL Standard: UL 943, UL 1203

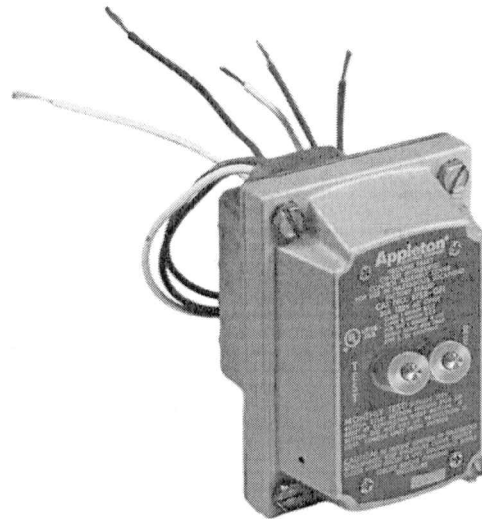

| Description | Catalog Number |
|--|----------------|
| Aluminum Ground Fault Interrupter Cover/Device | GFS-1 |

Dimensions

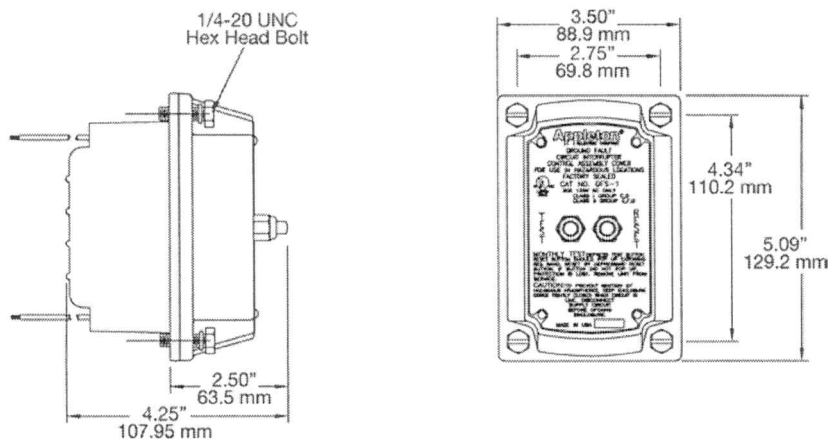

Covers are UL Classified to mount on Crouse-Hinds® EDS back boxes. Crouse-Hinds, EDS and ENP are registered trademarks of Cooper Crouse-Hinds.

Plugs and Receptacles

PLUGS AND RECEPTACLES: HAZARDOUS LOCATION