






OB/SB-1

4" Square Boxes - 2-1/8" Deep


With Conduit Knockouts




 **4SD-EK**
2-1/8" Deep, Welded




4SD-3/4
2-1/8" Deep, Welded




4SD-1
2-1/8" Deep, Welded

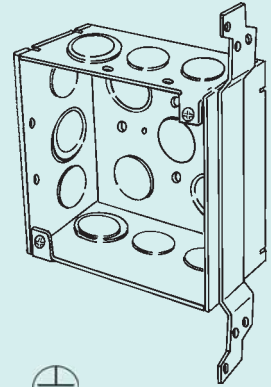


 **4SDVB-EK-PL**
2-1/8" Deep, Welded
Plain vertical bracket
set flush with front of box

Catalog Number (Universal No.)	Depth (inches)	Wiring Cubic Inch Capacity	Sides	Knockout Ends	Description Bottom	Wt. Lbs. Per 100	Std. Pkg.
4SD-EK	2-1/8	30.3	(8)1/2" (4)Eccentric KO	--	(2)1/2" (2)Eccentric KO	82.0	25
4SD-3/4 (52171-3/4)	2-1/8	30.3	(8)3/4"	--	(3)1/2" (2)3/4"	84.0	25
4SD-1 (52171-1)	2-1/8	30.3	(8)1"	--	(3)1/2" (2)3/4"	84.0	25
4SDVB-EK-PL	2-1/8	30.3	(6)1/2" (3)Eccentric KO	--	(2)1/2" (2)Eccentric KO	104.0	25
4SD-SPL (52171-SPL)	2-1/8	30.3	(8)1/2" (4)3/4"	--	(3)1/2" (2)3/4"	85.0	25
4SPD	2-1/8	30.3	(8)1/2" (4) 3/4" (4)3/4"	--	(3)1/2" (2)3/4" (2)3/4"	84.0	25



4SD-SPL
2-1/8" Deep, Welded



4SPD
Plenum Box
2-1/8" Deep, Drawn
Without any holes
and with reset knockouts
(Screws supplied with cover,
catalog number 8465P)



Groundskeeper Raised ground feature

on boss inside box provides one #10-32 tapped hole, allowing a 3/8" long green ground screw to be threaded into box without contacting mounting surface. Other boxes provided with flat ground tapped hole, except Plenum Boxes. See OB/SB-1 page 49 for ground screws, pigtails and accessories.

OB/SB-1