

Cold Weather Friendly



NSF

IP65 RATED

IP66 RATED

IP67 RATED

ILW130LED4WD



LUMENS: **17,630**

WATTS: **130**

LUMENS PER WATT: **138**

CRI: **84**

CCT: **4500K**

DIMMING: **10-100%**



Ordering Information

CATALOG #	DESCRIPTION	VOLTS
ILW130LED4WD	4' 130W LED Wet Location w/ Glare Free Lens	120-277

Options

SUFFIX #	DESCRIPTION
3C*	3' Cord (No Plug)
EB	Emergency Back-Up
4	480V Driver


*Also Available in 6', 10' and 20' lengths

Dimensions and Specifications

Overall Height: 6.25"

Overall Width: 14.375"

Length: 51.5"

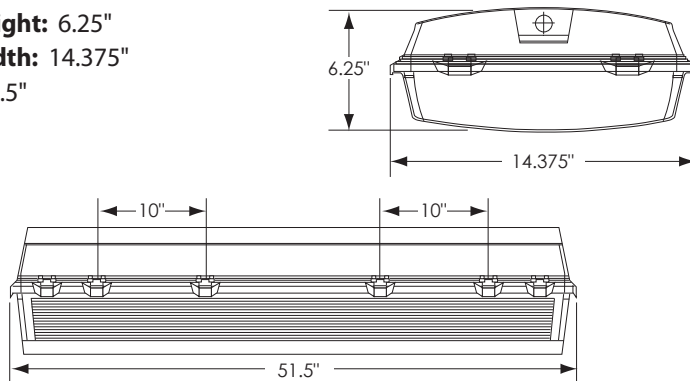

Accessories

CATALOG #	DESCRIPTION
MS360WL	Wet Location 360° Motion Sensor
80-271CMB	Ceiling Mount Bracket



Ambient Temperature Fixture Rating

PART #	DESCRIPTION	12" CHAIN MOUNT
ILW130LED4WD	4' 130W LED Wet Location w/ Glare Free Lens	45°C (113°F)

200,000+ HOURS



For more information including photometrics, Lighting Facts and DLC visit www.atlasled.com

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

