

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE		COLOR	DIMENSIONS in. [mm]				CA9 SERIES CRIMP DIE	CA-800(EZ) SERIES CRIMP DIE
	ENGLISH AWG	METRIC mm ²		MAX. WIRE INSULATION DIAMETER	L ± .03 [0,8]	W ± .01 [0,3]	P MIN.		
PV18-P47B	22-18	0,5-1,0	RED	.15 [3,8]	.89 [22,6]	.08 [2,0]	.39 [9,9]	CD9-1A	CD-800-1
PV14-P47B	16-14	1,5-2,5	BLUE	.17 [4,3]	.89 [22,6]	.08 [2,0]	.39 [9,9]	CD9-2A	CD-800-2

PRESS/APPLICATOR COMPATIBILITY CHART



PRESS	CP-871	CP-861
APPLICATOR	CA9 CA-800EZ	CA-800

NOTES:

- UL LISTED FOR:
 - A. SOLID OR STRANDED COPPER WIRE ONLY
 - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 - C. 600V. MAX. VOLTAGE RATING
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- MATERIAL:
 - A. STAMPING: COPPER, TIN PLATED
 - B. HOUSING: VINYL
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- WIRE STRIP LENGTH: 1/4" ^{+1/32}/₀ [6,4 ^{+0,8}/₀]



LISTED
587H
E52164

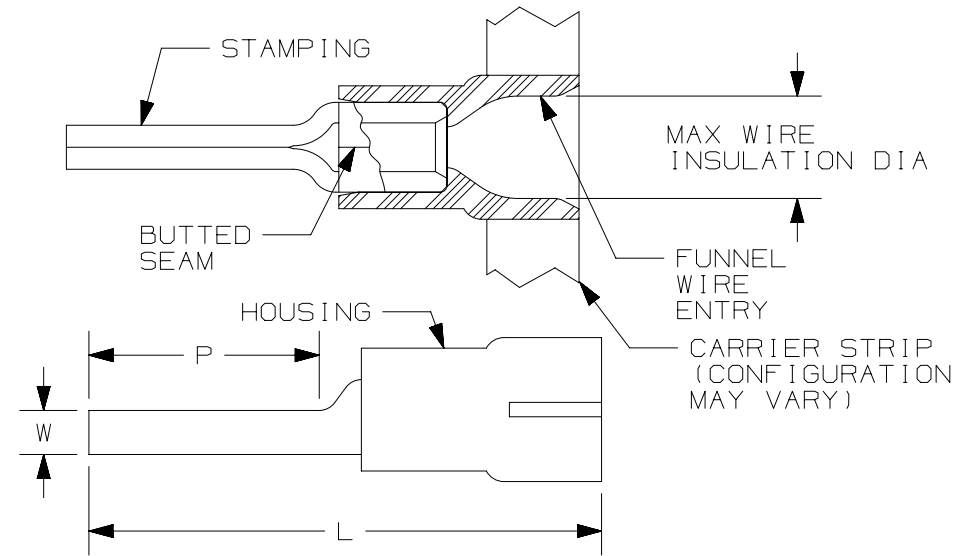

TITLE		PIN TERMINALS, VINYL INSULATED , CONTINUOUS REEL	
CUSTOMER DRAWING			
ITEM REVISION NAME	N41547BB/07	PANDUIT	
DATASET FILE NAME	N41547BB_DC/07A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.X ± .XX ±		SEE NOTES	
.XXX ± ANGLES ±		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		A41547	
DRAWN BY	DATE	CHK	SCALE
TNC	-	RLS	N.T.S.
SHT 1 OF 1		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
07	9/19	JHNU	JHNU	RGB	REVISED LISTING: UL WAS cULus	051570
06	07/14	MBY	JHNU	RGB	REVISED NOTES, REVISED TOOLS, REVISED CERTIFICATION	N41547BB-A41547
05	10.18.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT UPDATED DRAWING TO CURRENT STANDARDS	A41547

D10100DA/15