


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

- NOTES:
1. DIAMETER DIMENSION, SHOWN FOR REFERENCE ONLY.
 2. PLENUM-RATED CABLES MEET THE REQUIREMENTS OF NFPA 262. RISER-RATED CABLES MEET THE REQUIREMENTS OF UL 1666.
 3. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

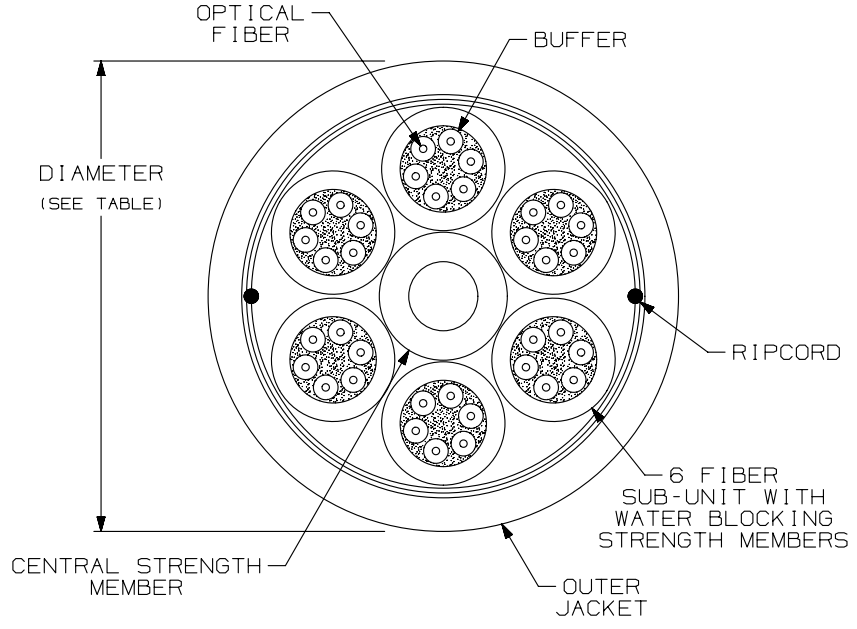

PLENUM			
TENSILE LOAD		BEND RADIUS	
INSTALLATION	LONG TERM	INSTALLATION	LONG TERM
400 lbs (1800 N)	120 lbs (540 N)	10.8 in (27.5 cm)	5.4 in (13.8 cm)
CABLE DIAMETER (REFERENCE ONLY)	TEMPERATURE		
	STORAGE/OPERATION		INSTALLATION
0.54" [13.9mm]	-40°F TO +176°F [-40°C TO +80°C]		32°F TO +140°F [0°C TO +60°C]
RISER RATED			
TENSILE LOAD		BEND RADIUS	
INSTALLATION	LONG TERM	INSTALLATION	LONG TERM
600 lbs (2670 N)	180 lbs (800 N)	13.2 in (33.6 cm)	6.6 in (16.8 cm)
CABLE DIAMETER (REFERENCE ONLY)	TEMPERATURE		
	STORAGE/OPERATION		INSTALLATION
0.66" [16.8mm]	-40°F TO +176°F [-40°C TO +80°C]		14°F TO +140°F [-10°C TO +60°C]

WEIGHT OF 2.5km REEL/BOX	
OFNP	OFNR
912.7 kg (2012.1 lbs)	993.7 kg (2190.7 lbs)

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	02-04-14	SAT	WMA	TCB	RELEASED TO PRODUCTION	M02055HZ-DC

TITLE		36 FIBER INDOOR/OUTDOOR CABLE WITH 900um BUFFERED FIBERS	
CUSTOMER DRAWING		PANDUIT	
ITEM REVISION NAME			
DATASET FILE NAME		M02055HZ_DC/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		PART NO.	
.x ± .xxx ± .010 (0.3)		SEE TABLE	
.xx ± .03 (0.8) ANGLES ±		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		M02055HZ-DC	
DRAWN BY	DATE	CHK	SCALE
SAT	02-04-14	WMA	NONE
SHT 1 OF 2			SIZE
			A

