

**T&B Catalog Number:** LT43H  
**UPC Number:** 03448108570  
**Description:** 1-1/2" Carflex®; liquidtight non-metallic fitting.




**Status:** Active

### Features

- Non-conductive and non-corrosive.
- Resistant to oil, acid, ozone and alkaline.
- Easy to install.
- Nitrile rubber "O" ring for a liquidtight termination.
- Temperatures up to 225&deg; F (107&deg; C)
- Meets UL standard 514B.

### Application

For use with Carflex®; conduit and Carflex®; X-Flex®; conduit.

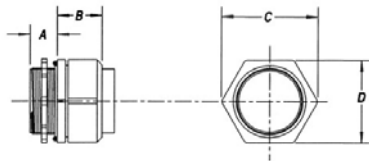

### General

Material Non-Metallic

### Dimension Information

Size (inches)	1 1/2
Degree of Bend	Straight
A (inches)	0.75
B (inches)	1.36
C (inches)	2.78
D (inches)	2.43

### Packaging

T&B Order Multiple	5
Package in Units	5
T&B Sold in UOM	Each
T&B Weight Per UOM	0.37 lbs. Each

### Application Support

T&B Sales Drawings	wsd-ac02107
Carflex Features & Applications	Available on Website
Carflex Installation & Technical Information	Available on Website
Cements-Primers & Sealers-Specifications & Applications	Available on Website

### Certifications



File Nbr:  
E 32447

**For further technical assistance, please contact us...**

Thomas & Betts - USA  
 8155 T&B Blvd.  
 Memphis, TN 38125  
 www.tnb.com

T&B Technical Support  
 MS 3B-50  
 8155 T&B Blvd.  
 Memphis, TN 38125

Hours: 7AM - 6PM CDT  
 Monday-Friday  
 Phone: (888) 862-3289  
 Fax: (901) 252-1321  
 Email:techsupport@tnb.com