



TURNLOK® LOCKING DEVICES


Power Interrupting Devices 2 Pole, 3 Wire 20A, 125V Hospital Use; 2 Pole, 3 Wire 20A, 125V; 2 Pole, 3 Wire 20A, 125V; 10A, 250VDC, 480VAC




23000HG



23000




23005N



**23056N
23035N**



23002N



23054N


CATALOG NUMBER	RATING		DESCRIPTION	CORD DIAMETER	3rd PARTY COMPLIANCE
	A.	V.			UL UL498
RECEPTACLES					
23000HG	20	125	Hospital Use, Non-Metallic		•
23050	20	125	Hospital Use, Black Bakelite		•
23000G	20 10	125 250VDC, 480VAC	Grounding, Non-Metallic		•
23000	20 10	125 250VDC, 480VAC	Non-Grounding, Non-Metallic		•
CONNECTORS					
23054N	20	125	Hospital Use, Non-Metallic	.250"-.656"	•
23002N	20 10	125 250VDC, 480VAC	Non-Metallic	.250"-.656"	•
PLUGS					
23056N	20	125	Hospital Use, Non-Metallic	.250"-.656"	•
23035N	20	125	Non-Metallic	.250"-.656"	•
23005N	20 10	125 250VDC, 480VAC	Non-Metallic	.250"-.656"	•

All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES

Power Interrupting Devices

3 Pole, 4 Wire 30A, 480V; 3 Pole, 4 Wire 30A, 600VAC; 20A, 250VDC; 3 Pole, 4 Wire 60A, 600V

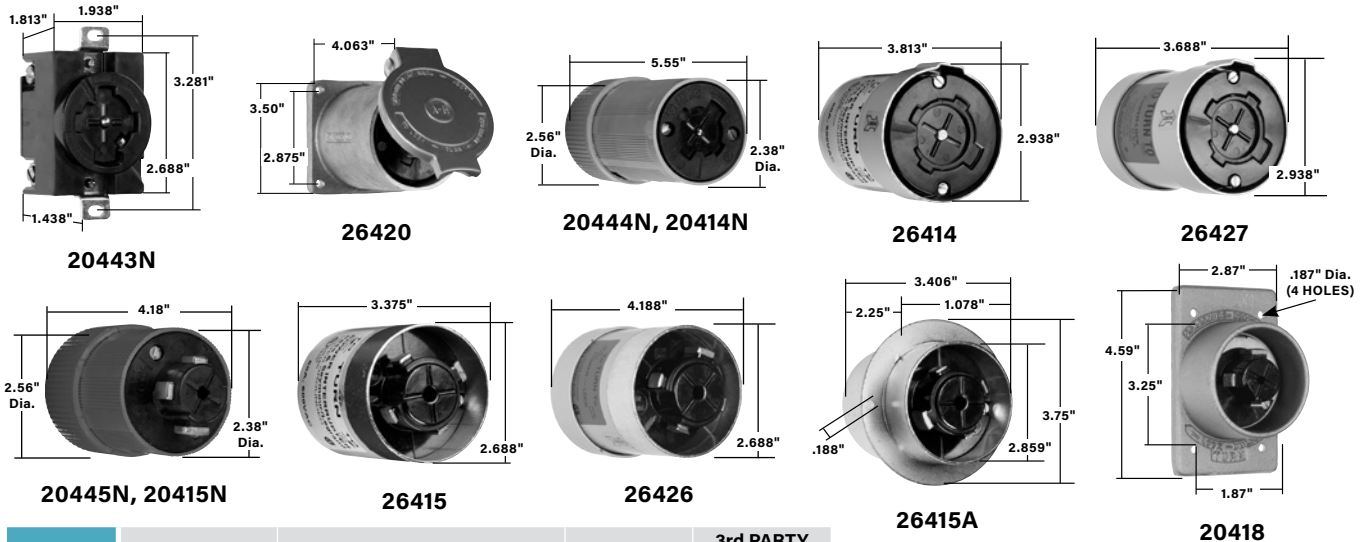


CATALOG NUMBER	RATING		DESCRIPTION	CORD DIAMETER	3rd PARTY COMPLIANCE
	A.	V.			UL498
RECEPTACLES					
20443N	30	480	Non-Metallic		
20403N	30	600VAC	Non-Metallic		•
	20	250VDC			
21420	30	600VAC	Angled, 3/4" Tap for Conduit, Diecast		•
	20	250VDC			
26420	60	600	Die-Cast with Lift Lid Enclosure		•
CONNECTORS					
20444N	30	480	Non-Metallic	.400"-1.062"	
20414	30	600VAC	Metallic	.562"-1.000"	
	20	250VDC			
20414N	30	600VAC	Non-Metallic	.400"-1.062"	•
	20	250VDC			
21414	30	600VAC	Metallic with Rubber Cord Grip	.360"-0.484"	
	20	250VDC			
26414	60	600	Metallic	.750"-1.250"	
26427	60	600	Metallic	.750"-1.250"	•
PLUGS					
20445N	30	480	Non-Metallic	.400"-1.062"	
20415	30	600VAC	Metallic	.562"-1.000"	
	20	250VDC			
20415N	30	600VAC	Non-Metallic	.400"-1.062"	
	20	250VDC			
21415	30	600VAC	Metallic with Rubber Cord Grip	.360"-0.484"	
	20	250VDC			
21426	30	600VAC	Metallic with Rubber Cord Grip	.484"-0.750"	
	20	250VDC			
21426S	30	600VAC	Metallic with Tab with Rubber Cord Grip	.484"-0.750"	
	20	250VDC			
26415	60	600	Metallic	.750"-1.250"	
26426	60	600	Metallic	.750"-1.250"	•
FLANGED INLETS & OUTLETS					
20418	30	600VAC	Inlet, Die-Cast for FS and FD Box		•
	20	250VDC			
26415A	60	600	Inlet, Die-Cast		

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
WPG1	Weatherproof Cover for 20403N
26400	Box and Plate for 26420
26401	Box only for 26404 Angle Adapter
26402	Mounting Plate only for 26401 Box
26404	45° Angle Adapter
20446N	Red Nylon Cover and Gasket for 20443N
20416N	Nylon Cover and Gasket for 20403N
20417N	Aluminum Cover (No Gasket) for 20403N


All devices listed on this page conform to NEMA WD-1 and WD-6.

TURNLOK® LOCKING DEVICES


Power Interrupting Devices 4 Pole, 5 Wire 30A, 600VAC; 20A 250VDC; 4 Pole, 5 Wire 60A, 600V




25250




26520




25414N




26527




26526



26514A




26515A




26401

CATALOG NUMBER	RATING		DESCRIPTION	CORD DIAMETER	3rd PARTY COMPLIANCE
	A.	V.			UL498
RECEPTACLES					
25250	30 20	600VAC; 250VDC	Die-Cast with Lift Lid Enclosure		
26520	60	600	Die-Cast with Lift Lid Enclosure		.
CONNECTORS					
25414N	30 20	600VAC; 250VDC	Non-Metallic	.625"-1.000" .725"-1.250"	
25414	30 20	600VAC; 250VDC	Metallic	.625"-1.000"	
26514	60	600	Metallic	.750"-1.250"	.
26527	60	600	Metallic with Rubber Cord Grip	.750"-1.250"	.
PLUGS					
25415N	30 20	600VAC; 250VDC	Non-Metallic	.625"-1.000" .725"-1.250"	
25415	30 20	600VAC; 250VDC	Metallic	.625"-1.000"	
26515	60	600	Metallic	.750"-1.250"	.
26526	60	600	Metallic with Rubber Cord Grip	.750"-1.250"	.
FLANGED INLETS & OUTLETS					
26515A	60	600	Inlet, Die-Cast		.
26514A	60	600	Outlet, Die-Cast		.



26402



26404

CATALOG NUMBER	DESCRIPTION	CATALOG NUMBER	DESCRIPTION
ACCESSORIES			
26400	Box and Plate for 26520	26402	Mounting Plate only for 26401 Box
26401	Box only for 26404 Angle Adapter	26404	45° Angle Adapter

All devices listed on this page conform to NEMA WD-1 and WD-6.