



## BRACKET, SERVICE DEADEND

Attaches to 1 1/4" through 3" diameter service masts. Front strap is rounded to prevent damage to bail of the service clamp. Square hole at end of the front slot captures the carriage bolt head during installation and prevents slippage after installation. Hot dip galvanized.



C2060169

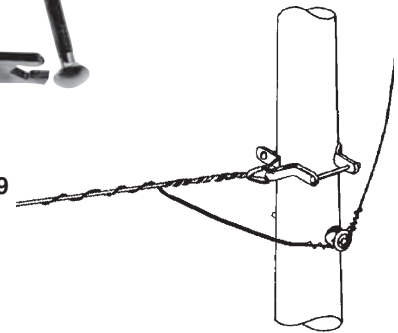


Catalog No.	Adjustment	Approx. Ship Wt. Lbs. Per 100 Pcs.
C2060169	1 1/4" — 3"	102

## BRACKETS, TELEPHONE HOUSE

Used where the pole lead attaches to the building at an angle or to carry leads around the corner of a building. Used with porcelain spool insulator and 8604 bolt (page 5-7) which are not included. Hot dip galvanized.



No. 8205

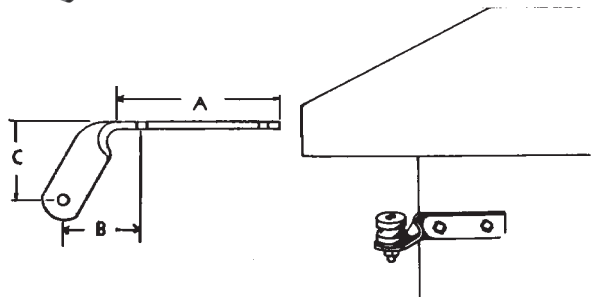


Catalog No.	Dimensions in Inches						Approx. Ship Wt. Lbs. Per 100 Pcs.
	Mtg. Holes	Ins. Holes	Steel Size	A	B	C	
8205	9/32	13/32	1/2 x 3/16	4 3/4	2 7/8	2 5/8	82

## BRACKETS, TRANSFORMER MOUNTING ALUMINUM RACK FRAME TYPE

These lightweight, easy-to-handle aluminum transformer mounting brackets are designed for 3 KVA thru 250 KVA transformers. Their bolted, rugged construction has pre-drilled holes for mounting. The convenient key-hole has a jump-proof lip for a secure mounting.

Units are designed to accommodate mounting one, two or three transformers and will fit NEMA- A, B and C lugs. A functional grounding lug is built-in on the back.

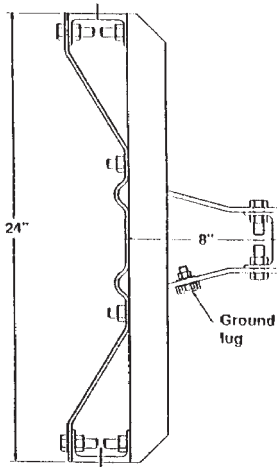

NO LONGER AVAILABLE.  
PLEASE SEE  
CATALOG SECTION 5B FOR  
UPDATED VERSIONS.



Catalog No.	Description	Approx. Ship Wt. Lbs.
C2128007	No transformer mtg. bolts	36
C2128007A	5/8 x 1 3/4-in. transf. mtg. bolts	36
C2128007B	3/4 x 2 in. transf. mtg. bolts	36
C2128007AB	5/8 & 3/4-in. transf. mtg. bolts	36